

Cisco.300-430.v2023-10-26.q181

□□□□:	300-430
□□□□:	Implementing Cisco Enterprise Wireless Networks
□□□:	Cisco
□□ □□ □□□:	181
□□:	v2023-10-26
# □□ □:	1388
# □□ □□□:	1810
https://www.krdump.com/Cisco.300-430.v2023-10-26.q181.html	

NEW QUESTION: 1


□□□□ □□ □□□□□□ □□ □□ □□□ □□□□ □□□□ □□ □□□ □□□□ □□□□□□. □ □□□ □□□□ □□ □□□□□ □□□ □□□□ Cisco FlexConnect AP □□ □□□□ □□□□ □□□ □□□□ □□□. □□□ □□□□□ □□ □□□ □□□□□ □□□?

- A. □□□□□ □□□□
- B. IGMP □□□□
- C. □□□□□-□□□□□ □□□□
- D. □□□□□ □□□□

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 2

□□□□ □□□□□□.

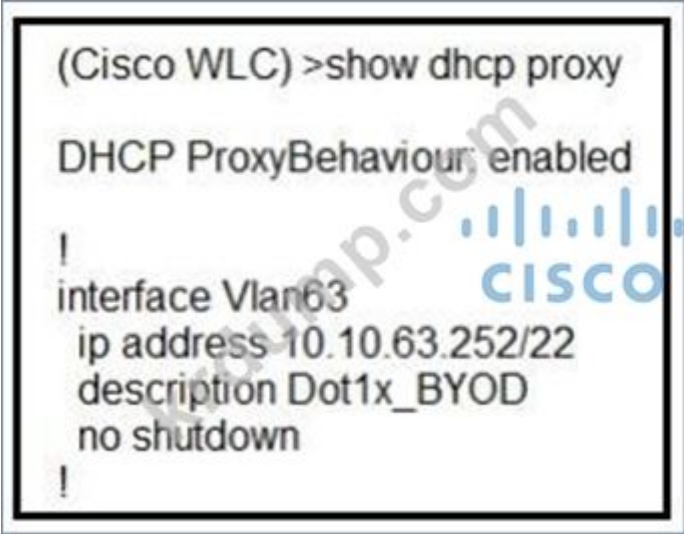

□□□□ □□□□ □ □□ ISE □□□ 10.3.10.101 □ 10.3.10.102□ DHCP □□□□□ □□□□ □□□□□. VLAN63□ WLAN□ □□□□ □□ BYOD □□□ □□ □□□□□□□□□□ □ □ □□ □□□□ □□□□ □□ □□□□□□□□. Cisco □□ □□□ □□ □□□ □□□□□ □□□□ □□□ □□□□□?

- A. Cisco WLC□□ DHCP □□□□ □□□□ □□□ □□□□ □ ISE □□□ □□□□□ VLAN □□□□□□□□□□ helper-address□ □□□□□□.
- B. Cisco WLC□□ DHCP □□□□ □□□□□□□□.
- C. Cisco WLC □□ VLAN □□□□□□□ □□□ □□□ □□□□□. ISE □□□ □□□□ □□□.

D. Cisco WLC can DHCP relay for VLANs and ip helper-address can relay DHCP to 200 ISE for authentication.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 3

Which QoS class provides the lowest bandwidth?

- A. Silver
- B. Gold
- C. Bronze
- D. Platinum

Answer: (SHOW ANSWER)

- Bronze/Background—Provides the lowest bandwidth for guest services.

NEW QUESTION: 4


Which Cisco Hyperlocation feature is used to monitor the location of a device? (Choose two.)

- A. NTP
- B. Cisco Hyperlocation can monitor the location of a device.
- C. Cisco LAN can monitor the location of a device.
- D. Cisco CMX can monitor the location of a device.
- E. Cisco CMX can monitor the location of a device.

Answer: C,D (LEAVE A REPLY)

NEW QUESTION: 5

Which feature is used to monitor the location of a device?

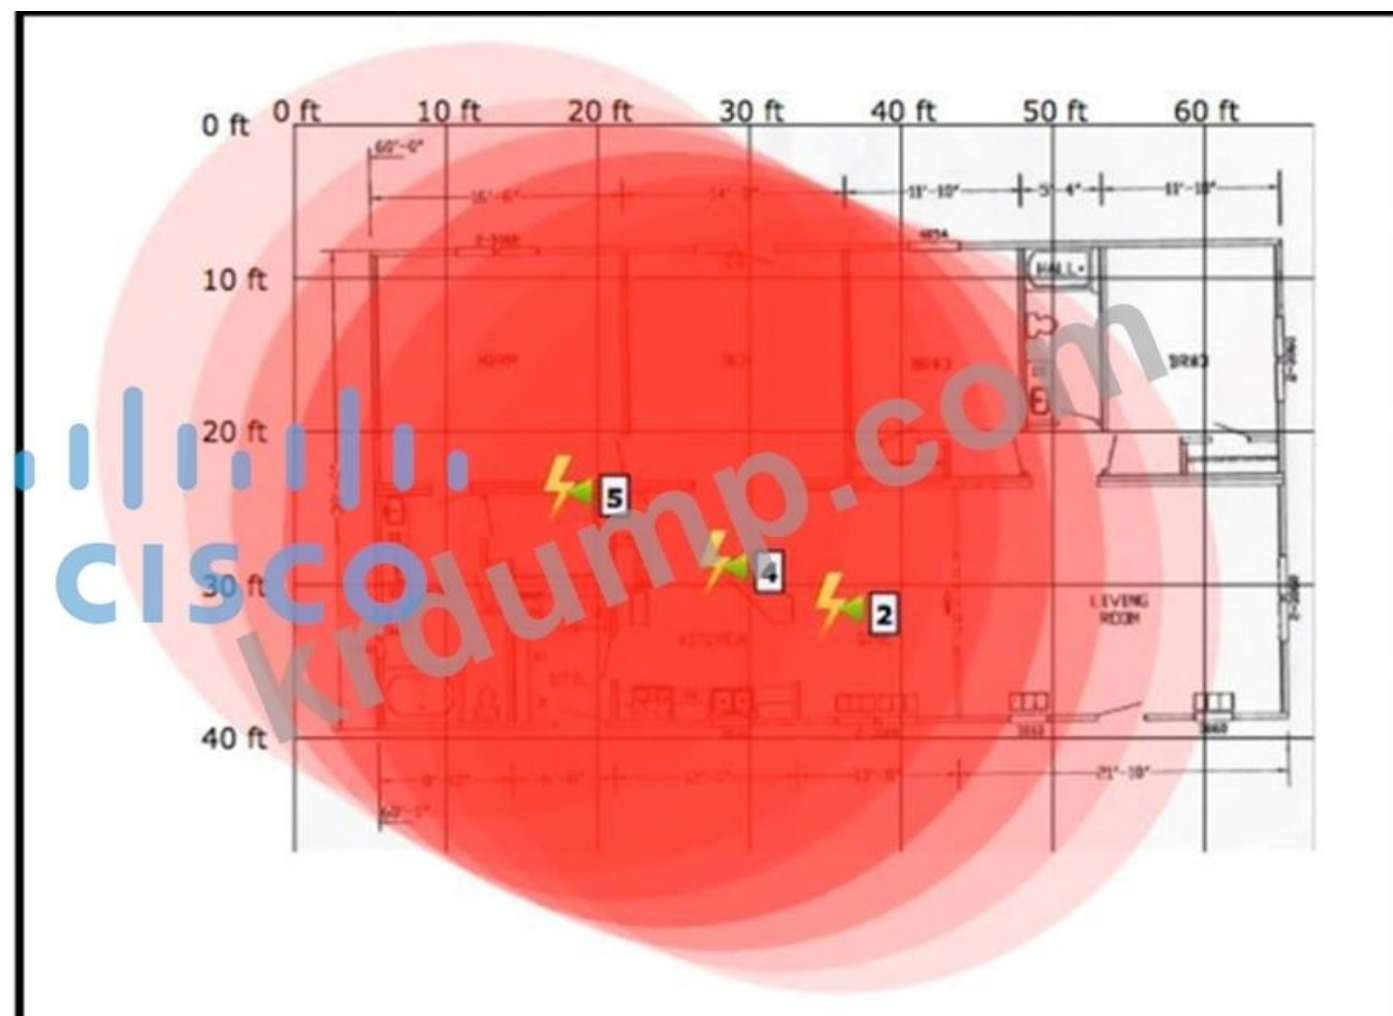

Which of the following is a valid 802.11 channel plan? (Choose two.)

- A. 1, 6, 11
- B. 1, 6, 11, 16
- C. 1, 6, 11, 16, 21

Answer: C (LEAVE A REPLY)

NEW QUESTION: 6

A Cisco Aironet 600 Series OfficeExtend AP is configured to use a Cisco WLC. Which of the following is a valid 802.11 channel plan? (Choose two.)

- A. 1, 6, 11
- B. WPA+WPA2
- C. 1, 6, 11
- D. CKIP
- E. 802.1X

Answer: B,C (LEAVE A REPLY)

For Layer 2 Security, the following options are supported for the 600 Series OfficeExtend Access Point

- None
- WPA+WPA2
- Static WEP
- 802.1X (only for remote LANs)

NEW QUESTION: 7

Which of the following is the correct multicast address for a PIM RP?

- A. 224.0.0.14
- B. 224.0.1.40
- C. 224.0.1.39
- D. 224.0.0.13

Answer: (SHOW ANSWER)

NEW QUESTION: 8

Which of the following is the correct MAC address for a Cisco Wave 2 AP?

- A. 00:00:00:00:00:00
- B. 00:00:00:00:00:00
- C. 00:00:00:00:00:00
- D. 00:00:00:00:00:00

Answer: A (LEAVE A REPLY)

* Cisco CMX supports the exclusion of probing clients filter. This indicates that Cisco CMX discards the RSSI probes that is used for probing clients. However this filtering adds significant load on Cisco CMX when the probing clients are too many.

NEW QUESTION: 9

Cisco Catalyst 9800 Series is a Cisco OEAP.

- A. RF
- B. RF
- C. AP
- D. RF

Answer: (SHOW ANSWER)

NEW QUESTION: 10

Which of the following is the correct MAC address for a Cisco Wave 2 AP?



Which two WLAN QoS mechanisms are supported by VoWLAN? (Choose two.)

- A. TSPEC
- B. SIFS
- C. 802.11e
- D. WMM
- E. APSD

Answer: C,D (LEAVE A REPLY)

Cisco Unified Wireless products support WMM, a QoS system based on IEEE 802.11e that has been published by the Wi-Fi Alliance, and WMM Power Save, as well as Admission Control.

NEW QUESTION: 11

Which two 802.1x protocols are supported by APs? (Choose two.)

- A. PAC
- B. RADIUS IP
- C. TACACS
- D. TACACS
- E. TACACS

Answer: B,C (LEAVE A REPLY)

NEW QUESTION: 12

Which two protocols are supported by the Cisco Unified Wireless LAN Controller?


```
(Cisco Controller) >show nmsp notification interval

NMSP Notification Interval Summary

RSSI Interval:
Client..... 20 sec
RFID..... 20 sec
Rogue AP..... 20 sec
Rogue Client..... 20 sec

Spectrum Interval:
Interferer device..... 20 sec

(Cisco Controller) >
```

□□□□ □□□□□□ Cisco CMX□□ □□ □□□□ □□□ □ □□ □□ □□□□□□□□. Rogue□ □□ 5□□□ □□□□□ □□□□ □□ □□□ □□□□ □□□?

- A. □□ □□ □□ □□ rssi rogues 5
- B. □□ nmsp □□ □□ rssi rogues 5
- C. □□ □□ □□ □□ rssi rogues 5
- D. □□ cmx □□ □□ rssi rogues 5

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 13

□□□□ □□□□□ □□ □□□□□□ BYOD□ □□□□ □□□□. □□ □□ □□□ □□ □□ SSID □□ □□□ □□□ □□□. □□ □ □□ □□ WLAN □□□ □□□□ □□□? (□ □□□ □□□□□.)

- A. NAC □□□ □□ NAC□ □□□□□.
- B. DHCP □□□ □□□□□. □□ □□.
- C. □□ □□ □□ □□□□ □□□□□.
- D. DHCP □□□□□□ □□□□□.
- E. AAA □□□ □□□ □□□□ □□□□□.

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 14

IT □□□□ □□ □□ □□ 2□ □□□ □□ □□□ □□□ □□□ □□□□ □□□□ □□□□. Cisco Prime□□ □ □□□□ □□□ □ □□ □ □□ □□□ □□□□□? (□ □□□ □□□□□.)

- A. XLS
- B. □□ □□□
- C. PDF
- D. DOC
- E. CSV

Answer: C,E ([LEAVE A REPLY](#))

NEW QUESTION: 15

□ □□□□□□ □□ □□□□□ □□□ □ □□□□□ □□□□ □□□□□□ □□□□ □□□□ □□□□ □□□ □□□ 2 □□□□□□□ □□□□□ □□□□ □□ □□ □□□ □□□□□?

- A. □□ □□□ 3 □□□□□ IGMPv3□ □□□□□□.
- B. WLC□□ IGMP □□□ □□□
- C. WLC□□ □□□□□ □□ □□□
- D. □□ □□□ 3 □□□□□ □□□□□ □□□ □□□□.

Answer: B ([LEAVE A REPLY](#))

A. config terminal
wireless profile policy [policy name]
local switching
end

B. config terminal
wireless flexconnect policy [policy name]
local switching
end

C. config terminal
wireless flexconnect policy [policy name]
no central switching
end

D. config terminal
wireless profile policy [policy name]
no central switching
end

- A. ☐☐ A
- B. ☐☐ B
- C. ☐☐ C
- D. ☐☐ D

Answer: (SHOW ANSWER)

☐☐

Procedure		
	Command or Action	Purpose
Step 1	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 2	wireless profile policy profile-policy Example: Device(config)# wireless profile policy default-policy-profile	Configures a wireless policy profile.
Step 3	no central switching Example: Device(config-wireless-policy)# no central switching	Configures a WLAN for local switching.

☐☐: ☐☐ ☐☐ ☐☐☐☐ ☐☐ ☐☐ ☐☐ ☐☐.

NEW QUESTION: 20

Which two statements are true regarding the configuration of a WLAN on a Cisco Catalyst 3850 switch? (Choose two.)

- A. The switch must be configured with a WLAN ID.
- B. The SSID must be configured with the same name as the VLAN on the Cisco ISE.
- C. The switch must be configured with a WLAN ID and a WLAN name.
- D. 2.4GHz and 5GHz must be configured with the same WLAN ID.

Answer: (SHOW ANSWER)

Cisco WLAN solution addresses that limitation by support of identity networking. That allows the network to advertise a single SSID, but allows specific users to inherit different QoS, VLAN attributes and/or security policies based on the user credential.

Dynamic VLAN assignment is one such feature that places a wireless user into a specific VLAN based on the credentials supplied by the user. This task of assigning users to a specific VLAN is handled by a RADIUS authentication server, such as Cisco ISE. This can be used, for example, to allow the wireless host to remain on the same VLAN as it moves within a campus network.

NEW QUESTION: 21

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

- A. IGMP snooping
- B. IGMP snooping 180-second timer
- C. Multicast traffic is sent to all clients
- D. 802.3x VLAN tagging
- E. AP IP address 238.255.255.255

Answer: A,C (LEAVE A REPLY)

<https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/81671-multicast-wlc-lap.html>

NEW QUESTION: 22

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

- A. Multicast traffic is sent to all clients
- B. Multicast traffic 1400-second timer
- C. 200 APs can be connected to a single WLC
- D. 400 APs can be connected to a single WLC
- E. 300 APs can be connected to a single WLC (2100) and 7000 clients
- F. 300 APs can be connected to a single WLC

Answer: (SHOW ANSWER)

WLAN clients can be connected to a single WLC for a WLAN. Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

NEW QUESTION: 23

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

- A. Multicast traffic is sent to all clients
- B. Multicast traffic 1400-second timer
- C. 200 APs can be connected to a single WLC
- D. IGMP snooping

Answer: C (LEAVE A REPLY)

NEW QUESTION: 24

Which two are valid reasons for using a multicast WLC for a WLAN? (Choose two.)

- A. X, Y
- B.
- C. AP
- D. MAC
- E. WLC IP

Answer: (SHOW ANSWER)

```
[cmxadmin@cnx ~]$ cmxloc start
MAC address: 40:98:ad:71:e8:b9
```

MAC Address	X	Y	Comp Type	Location	Last Located	Current Server Time
40:98:ad:71:e8:b9	23.87	30.08	FUSION	S>Cisco>Floor1	2018-07-13T20:01:29.942+0200	2018-07-13T20:01:31.760+0200

https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/88/b_ap_4800_hyperlocation_deployment_guide.html

NEW QUESTION: 25

FlexConnect APs can be configured to operate in local authentication mode. In this mode, the AP handles all authentication and switching locally. FlexConnect APs can also be configured to operate in local switching mode. In this mode, the AP handles all authentication and switching locally. FlexConnect APs can also be configured to operate in local authentication and local switching mode. In this mode, the AP handles all authentication and switching locally.

- A. ISE NAC
- B. 802.11r
- C.
- D. FlexConnect

Answer: (SHOW ANSWER)

local authentication, local switching--In this state, the FlexConnect access point handles client authentication and switches client data packets locally. This state is valid in standalone mode and connected mode.

NEW QUESTION: 26

```
aaa new-model
aaa local authentication default authorization default
aaa group server radius rad-group
server name ise-lab272
aaa authentication login default local
wireless profile policy test profiling
accounting-list acct method
radius-profiling
```

Cisco Catalyst 9800 Series Controller. RADIUS. Cisco ISE. ISE. Cisco 9800 Series.

- A. aaa acct_method rad-group
- B. aaa acct_method rad-group
- C. aaa ID acct_method rad-group
- D. aaa exec acct_method rad-group

Answer: B (LEAVE A REPLY)

.

[illegible]

- Answer:** ([SHOW ANSWER](#))

□□ VLAN □□□ □□□□□ Cisco Wireless LAN Controller□ □□ □□□ □□□ □□□?

- Answer: D (LEAVE A REPLY)**

NEW QUESTION: 29

A. □□□ □□□ □□□□ □□ □□□ □□□ □□ □□□ □□□□□□□.

B. □□□ □□□□□ □□□ □□□ □□□ □□□□□.

C. □□ □□□ □□□□□□ □□□ □□□□□.

D. □□ □□□ □□□ □□□ □□□□ □□□ □□□□□.


Answer: B (LEAVE A REPLY)

11

https://www.cisco.com/c/en/us/td/docs/solutions/Enterprise/Borderless_Networks/Unified_Access/BYOD_Design

NEW QUESTION: 30

□ □ □ □ □ □ □ □ □ □ .

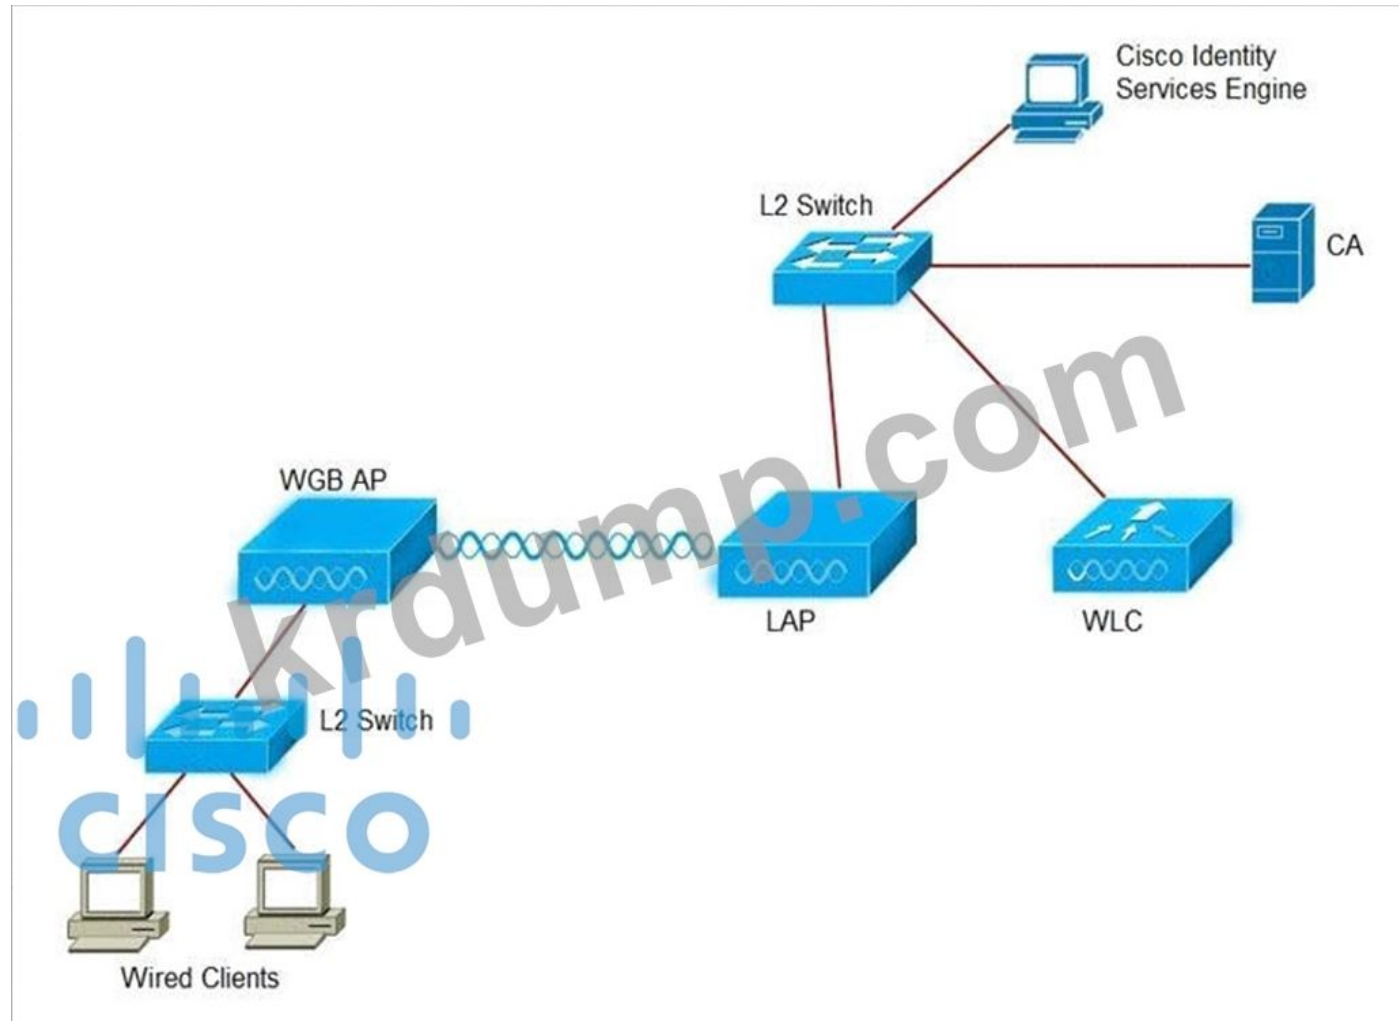

□□□□□ WGB□ □□ □□□□ □□ □□□□□ □□□□ RADIUS □□□ □□ WGB □□□□ □□□□ □□□. □ □□□ □□□□ □ □□□ □□□□□? (3□□ □□□□□.)

A. WLC□□ □□□□ □□□□□.

B. □□□□ □□□□ □□□□□ □□□ □ □□□ ISE□□ □□□ □□□□□.

C. WGB□□ □□□, WLAN □ □□ □□□□□□ □□□□□.

D. ISE□□ WGB□ □□□□ □□□ □□□□□.

E. ISE□ □□ □□□□ □□□ □□□□ □□□□□.

F. ISE ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ **WLAN** ☐ ☐ ☐ ☐ ☐.

Answer: B,C,F (LEAVE A REPLY)

NEW QUESTION: 31

□□□□ IT □□ □□□ □□□ □□ BYOD□ □□□□□ □□□. BYOD□ □□□ □□□□ □□ □□□ □□□□□?

- A.** ☐ ☐ ☐ ☐ ☐ ☐
- B.** VPN ☐ ☐ ☐ ☐
- C.** ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
- D.** ☐ ☐ ☐ ☐ ☐ ☐

Answer: B (LEAVE A REPLY)

300-430     **300-430**        

NEW QUESTION: 32



□□□□□ Cisco WLC□□ □□□ □□□□□ □□□. □□□ □□ □□□□□ □□ □□ AP□ □□□□ □□□□□?

- A.** SSID □□□□ □□ □□ AP□ 4000□ □□ □□□□ -60dBm□□ □□

Answer: B (LEAVE A REPLY)

- **RSSI**—Requires that the rogue access point have a minimum received signal strength indication (RSSI) value. For example, if the rogue access point has an RSSI that is greater than the configured value, then the access point could be classified as malicious. If you choose this option, enter the minimum RSSI value in the **Minimum RSSI** text box. The valid range is 0 to -128 dBm (inclusive).
- **Duration**—Requires that the rogue access point be detected for a minimum period of time. If you choose this option, enter a value for the minimum detection period in the **Time Duration** text box. The valid range is 0 to 3600 seconds (inclusive), and the default value is 0 seconds.

NEW QUESTION: 33

□□□□□ Cisco Hyperlocation □□□ □□□□ □□□□ Cisco CMX□□ cmxloc □□ □□□ □□□□□. □□ □ □□□□□ □□□ □□□□□? (□ □□□ □□□□□.)

- A.** X, Y ☐☐ ☐☐
- B.** ☐☐☐☐☐ ☐☐

□ □

```
[cmxadmin@cmx ~]$ cmxloc start
MAC address: 40:98:ad:71:e8:b9
```

MAC Address	X	Y	Comp Type	Location	Last Located	Current Server Time
40:98:ad:71:e8:b9	23.87	30.08	FUSION	SJ>Cisco>Floor1	2018-07-13T20:01:29.942+0200	2018-07-13T20:01:31.760+0200

https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/88/b_ap_4800_hyperlocation_deployment_g

NEW QUESTION: 34

□□ □□□□□□ □□□□□ □□□□□□ □□□□ □ □□ □□□ □□□□□? (3□□ □□□□□.)

A. HTTP □□□ □□□□

B. DHCP

C. MAC OUI

D. ☐☐☐ ☐☐

E. OS ☐☐

F. IP ☐☐

Answer: A,B,C (LEAVE A REPLY)

The user can configure these policies and enforce end-points with specified policies. The wireless clients will be profiled based on MAC OUI, DHCP, HTTP user agent (valid Internet is required for successful HTTP profiling). The WLC uses these attributes and predefined classification profiles to identify devices.

NEW QUESTION: 35

□□□□□ Mobility Express AP□ □□□ □□ □□□□□□□ Fastlane□ □□□□ □□□ □□□□□. □□□□□ Apple □□□ □□ □□□□ □□□□□□□□ □□□□ □□□□. □□ □□□ □□ □□ iPhone□ □□

14.5.432302546□□ □□□□□□□□. □□□□□ □□□ WLAN□□ □□ QoS □□□□ □□□□ □□□?

A. ☐ ☐

B. ☐ ☐ ☐

C. ☐ ☐ ☐ ☐

D. ☐☐☐ ☐☐

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 36

[illegible]

A. Cisco Prime Infrastructure ☐ ☐ ☐ **CleanAir** ☐ ☐ ☐

B. Cisco Prime Infrastructure ☐ ☐ ☐ ☐ ☐

C. Cisco Wireless LAN Controller

D. Cisco Wireless LAN Controller ☐ ☐ ☐ ☐ ☐

Answer: A ([LEAVE A REPLY](#))

11

Proactive Interference Protection by Using Cisco CleanAir—Continuous Wi-Fi spectrum analysis graphically shows the source and location of interference impacting the Wi-Fi network. Advanced real-time spectrum analysis and diagnostic capabilities are available with Cisco CleanAir-enabled access points.

https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/Apr2014/CVD-CampusCleanAirDesignGuide-APR1

NEW QUESTION: 37

Which two actions can be taken to protect a Wi-Fi network from a rogue access point (AP)? (Choose two.)
A. Set the SSID value to ATC.
B. Set the SSID value to ATC.
C. Set the SSID value to ATC.
D. Set the SSID value to ATC.
E. Set the SSID value to ATC.
F. Set the SSID value to ATC.
G. Set the SSID value to ATC.
H. Set the SSID value to ATC.

Set SSID value to ATC	Type
malicious	Condition
Set substring-ssid to ATC	Condition
friendly	
external	
internal	

Answer:

Set SSID value to ATC	Type
malicious	Condition
Set substring-ssid to ATC	Condition
friendly	
external	
internal	

Seq	Action	Source IP/Mask	Destination IP/Mask	Protocol	Source Port	Dest Port
1	Permit	0.0.0.0 / 0.0.0.0	0.0.0.0 / 0.0.0.0	UDP	DNS	Any
2	Permit	0.0.0.0 / 0.0.0.0	0.0.0.0 / 0.0.0.0	UDP	Any	DNS

<https://www.cisco.com/c/en/us/support/docs/security/identity-services-engine/115732-central-web-auth-00.html>

NEW QUESTION: 41

Which two Cisco Prime Infrastructure tasks are required to enable Adaptive wIPS Top 10 APs? (Choose two.)

- A. Enable wIPS on the 10 top APs.
- B. Enable wIPS on the 10 top APs.
- C. Enable wIPS on the 10 top APs.
- D. Enable wIPS on the 10 top APs.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 42

Which two protocols are used by MSE to communicate with the controller? (Choose two.)

- A. SOAP/XML
- B. NMPSP
- C. HTTP
- D. SNMP

Answer: B (LEAVE A REPLY)

HTTP

Ensure that the NMSP session is active to push the profile to the controller.

[https://www.cisco.com/c/en/us/td/docs/wireless/mse/7-6/MSE_wIPS/MSE_wIPS_7_6/MSE_wIPS_7_5_chapter_NMSP\(Network_Mobility_Services_Protocol\)_-LAN_WiPS_Deployment_Guide.html](https://www.cisco.com/c/en/us/td/docs/wireless/mse/7-6/MSE_wIPS/MSE_wIPS_7_6/MSE_wIPS_7_5_chapter_NMSP(Network_Mobility_Services_Protocol)_-LAN_WiPS_Deployment_Guide.html)

https://www.cisco.com/c/en/us/td/docs/wireless/technology/wips/deployment/guide/WiPS_deployment_guide.html

NEW QUESTION: 43

Which two RADIUS attributes are required for EAP authentication? (Choose two.)

Event	5405 RADIUS Request dropped
Failure Reason	11036 The Message-Authenticator RADIUS attribute is invalid

Which two RADIUS attributes are required for EAP authentication? (Choose two.)

- A. RADIUS attribute IP address.
- B. RADIUS attribute IP address.
- C. RADIUS attribute EAP authentication.
- D. RADIUS attribute EAP authentication.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 44

□□□□ □□□□□□.



□□□□□ Cisco WLC□□ □□□ □□□□□ □□□. □□□ □□ □□□□□ □□ □□ AP□ □□□□ □□□□□?

- A. SSID □□□□ □□ □□ AP□ 4000□ □□ □□□□ -60dBm□□ □□
- B. SSID □□□□ □□ □□ AP□ 3000□ □□ □□□□ -70dBm□□ □□
- C. SSID □□□□ □□ □□ AP□ 4000□ □□ □□□□ -70dBm□□ □□
- D. SSID □□□□ □□ □□ AP□ 3000□ □□ □□□□ -60dBm□□ □□

Answer: (SHOW ANSWER)

- **RSSI**–Requires that the rogue access point have a minimum received signal strength indication (RSSI) value. For example, if the rogue access point has an RSSI that is greater than the configured value, then the access point could be classified as malicious. If you choose this option, enter the minimum RSSI value in the **Minimum RSSI** text box. The valid range is 0 to -128 dBm (inclusive).
- **Duration**–Requires that the rogue access point be detected for a minimum period of time. If you choose this option, enter a value for the minimum detection period in the **Time Duration** text box. The valid range is 0 to 3600 seconds (inclusive), and the default value is 0 seconds.

NEW QUESTION: 45

□□□□ □□□□□□.

Event	5405 RADIUS Request dropped
Failure Reason	11036 The Message-Authenticator RADIUS attribute is invalid

□□ □□□□□ □□ □□□□□ RADIUS □□□ □□□□□□. RADIUS□ □□□ □□□□□□ □□□□ □□□ □ □□□ □□□□□. □□ □□ □□ □□□□□ □□ □□□ □□□□ □□□ □□□□□. □□ □□ □□□□ □□□□□?

- A. RADIUS □□□ □□□ □□□ □□□□□ □□□ □□□ □□□□□□.
- B. □□ □□□□□□ RADIUS □□□ IP□□ □□□ □□□□□.
- C. □□□□□ RADIUS □□□□ □□ □□ □□ □□□□□.

- Answer: ([SHOW ANSWER](#))**

NEW QUESTION: 50

A. □□ □□□ HTTP □□□□ □□□□ □□ □□□□ □□□□□.

C. □□ □□□ HTTPs □□□□ □□□□ □□ □□ □□□□ □□□□□.

E. □□ □□□ SNMP □□□□ □□□□ □□ □□□□ □□□□□.

The following are the different options to choose for access before authentication:

- **Allow HTTPs traffic only before authentication and block all the traffic.**
 - To do this, click the sequence number whose Source Port or Dest Port has the value HTTPs. The Access Control Lists > Rules > Edit page appears and you can select Permit from the Action drop-down list and click Apply.
- **Allow all the traffic before authentication and intercept HTTP only.**
 - To intercept HTTP, click the sequence number whose Source Port or Dest Port has the value HTTP. The Access Control Lists > Rules > Edit page appears and you can select Deny from the Action drop-down list and click Apply.

[illegible]

A. ☐☐☐☐ ☐☐☐☐☐ ☐☐☐☐☐

C. ☐☐ ☐☐ ☐☐☐☐ ☐☐

Answer: C (LEAVE A REPLY)

NEW QUESTION: 52

□□□□ □□□□□□.

```
(Cisco WLC) >show dhcp proxy
DHCP ProxyBehaviour: enabled
!
interface Vlan63
ip address 10.10.63.252/22
description Dot1x_BYOD
no shutdown
!
```

□□□□ □□□□ □ □□ ISE □□□ 10.3.10.101 □ 10.3.10.102□ DHCP □□□□□ □□□□ □□□□□. VLAN63□ WLAN□ □□□□ □□ BYOD □□□ □□ □□□□□□□□□ □ □ □□ □□□□ □□□□ □□ □□□□□□□. Cisco □□ □□□ □□ □□□ □□□□□ □□□□ □□□ □□□□□?

- A. Cisco WLC□□ DHCP □□□□ □□□□□□□.
- B. Cisco WLC□□ DHCP □□□□ □□□□□□□ VLAN □□□□□□□ ip helper-address □□□ □□□□ DHCP □ 2□□ ISE □□□ □□□□□.
- C. Cisco WLC□□ DHCP □□□□ □□□□ □□□ □□□□ □ ISE □□□ □□□□□ VLAN □□□□□□□ helper-address□ □□□□□.
- D. Cisco WLC □□ VLAN □□□□□□□ □□□ □□□ □□□□. ISE □□□ □□□□ □□□.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 53

IT □□□□ □□ □□ □□ 2□ □□□ □□ □□□ □□□ □□□ □□ □□□□ □□□□ □□□□. Cisco Prime□□ □ □□□□ □□□ □ □□ □ □□ □□□ □□□□□? (□ □□□ □□□□□.)

- A. CSV
- B. PDF
- C. XLS
- D. DOC
- E. □□ □□□

Answer: A,B (LEAVE A REPLY)

Reports are saved in either CSV or PDF format and are either saved to a file on Prime Infrastructure for later download or emailed to a specific email address.

NEW QUESTION: 54

□□□□ □□□□□□.

NEW QUESTION: 57

Which two statements are true about RRM in IEEE 802.11? (Choose two.)
RRM is used to manage the radio resources of the WLAN. 802.11 RRM is used to manage the radio resources of the WLAN. 802.11 RRM is used to manage the radio resources of the WLAN.

- A. Cisco APs use RRM.
- B. RRM is used to manage the radio resources of the WLAN.
- C. APs use RRM to manage the radio resources of the WLAN.
- D. Non-802.11 RRM is used to manage the radio resources of the WLAN.

Answer: D (LEAVE A REPLY)

https://www.cisco.com/c/en/us/td/docs/wireless/controller/9800/configure-guide/b_wi_16_10_cg/radio-resource-

NEW QUESTION: 58

Which two statements are true about Cisco CMX? (Choose two.)
Cisco CMX is used to manage the radio resources of the WLAN. Cisco CMX is used to manage the radio resources of the WLAN. Cisco CMX is used to manage the radio resources of the WLAN.

- A. Cisco CMX is used to manage the radio resources of the WLAN.
- B. Cisco CMX is used to manage the radio resources of the WLAN.
- C. Cisco CMX is used to manage the radio resources of the WLAN.
- D. Cisco CMX is used to manage the radio resources of the WLAN.
- E. Cisco CMX is used to manage the radio resources of the WLAN.

Answer: (SHOW ANSWER)

https://www.cisco.com/c/en/us/td/docs/wireless/mse/106/cmx_config/b_cg_cmx106/managing_cisco_cmx_syste

NEW QUESTION: 59

Cisco Hyperlocation is used to manage the radio resources of the WLAN. Cisco Hyperlocation is used to manage the radio resources of the WLAN. Cisco Hyperlocation is used to manage the radio resources of the WLAN.

- A. Cisco CMX is used to manage the radio resources of the WLAN.
- B. NTP is used to manage the radio resources of the WLAN.
- C. LAN is used to manage the radio resources of the WLAN.
- D. Cisco Hyperlocation is used to manage the radio resources of the WLAN.
- E. Cisco CMX is used to manage the radio resources of the WLAN.

Answer: (SHOW ANSWER)

The major steps involved in setting up a Hyperlocation system are:

- 1. Assemble the APs and mount them to the ceiling, recording the exact X, Y, height, and orientation of the devices.
- 2. Install Cisco WLC and connect the APs to Cisco WLC.
- 3. Enable the functions that are required, including Hyperlocation, in Cisco WLC.
- 4. Import Cisco WLC into Cisco PI.
- 5. Place the AP on the map in Cisco PI.
- 6. Save and export the map from Cisco PI to a local storage point.
- 7. Install Cisco CMX.
- 8. Configure and enable Hyperlocation.
- 9. Import the map from the local storage point.
- 10. Verify that the system is showing the clients correctly on the map and that the APs are placed and oriented correctly.
- 11. Complete Location Accuracy testing of static clients to determine the level of accuracy obtained.

<https://www.cisco.com/c/en/us/products/collateral/wireless/mobility-services-engine/datasheet-c78-734648.html>

NEW QUESTION: 60

□□□□ □□□□□□.

Rogue Rule > Edit

Rule Name

Rule 1

Type

Malicious

Match Operation

☒ Match All ☐ Match Any

Enable

☒

Conditions

Minimum RSSI (-95 to -50)

-65

dBm

Time Duration (0-3600)

3600

secs.

User configured SSID

Admin

Add SSID

Remove

Add Condition

Client Count

Add Condition

□□□□□ Cisco WLC□□ □□□ □□□□□ □□□. □□□ □□ □□□□□ □□ □□ AP□ □□□□ □□□□□?

- A. SSID □□□□ □□ □□ AP□ 3000□ □□ □□□□ -70dBm□□ □□
- B. SSID □□□□ □□ □□ AP□ 4000□ □□ □□□□ -70dBm□□ □□
- C. SSID □□□□ □□ □□ AP□ 4000□ □□ □□□□ -60dBm□□ □□
- D. SSID □□□□ □□ □□ AP□ 3000□ □□ □□□□ -60dBm□□ □□

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 61

Which Cisco Prime Infrastructure feature allows WLANs to adaptively adjust the number of APs that are active?

Adaptive wIPS Top 10 APs are selected.

- A. The number of wIPS is limited to the top 10 APs.
- B. The number of APs is limited to 10 wIPS.
- C. The number of APs is limited to 10 wIPS.
- D. The number of wIPS is limited to the top 10 APs.

Answer: B ([LEAVE A REPLY](#))

300-430 Cisco Prime Infrastructure feature allows WLANs to adaptively adjust the number of APs that are active. DumpTop 300-430! DumpTop 300-430 Cisco Prime Infrastructure, DumpTop 300-430 Cisco Prime Infrastructure feature allows WLANs to adaptively adjust the number of APs that are active. DumpTop 300-430 Cisco Prime Infrastructure feature allows WLANs to adaptively adjust the number of APs that are active. <https://www.dumptop.com/Cisco/300-430-dump.html> (355 Q&As Dumps, **30%OFF** Special Discount: **KrDump**)

NEW QUESTION: 62

Which Cisco Catalyst 9800 Series feature allows IEEE 802.1x APs to authenticate using EAP-PEAP?

- A. 802.1x EAP-PEAP
- B. 802.1x EAP-TLS
- C. CAPWAP DTLS + EAP-FAST
- D. CAPWAP DTLS + EAP-FAST

Answer: ([SHOW ANSWER](#))

https://www.cisco.com/c/en/us/td/docs/wireless/controller/ewc/1612/configguide/ewc_cg_16_12/802_1x_support.pdf

NEW QUESTION: 63

Which Cisco Catalyst 9800 Series feature allows IEEE 802.1x APs to authenticate using EAP-PEAP?

- A. DSCP 26 to 30 COS
- B. DSCP 48 to 52 COS
- C. COS 5 ~ DSCP 46
- D. DSCP 46 to 50 COS

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 64

Which Cisco Catalyst 9800 Series feature allows IEEE 802.1x APs to authenticate using EAP-PEAP?

- A. SSH to APs via TFTP to Cisco Prime Infrastructure.
- B. Smart APs to Cisco Prime Infrastructure.
- C. WLC to APs via Cisco Prime Infrastructure.
- D. Cisco Prime Infrastructure to APs via Cisco Prime Infrastructure.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 65

IT □□□□ □□□□ □□□ Apple iOS□ □□ □□□□□ □□□□ □□□□. QoS □□□ WLAN□□ □□□□ □□□□. □□ □□□□ □□□□ □□□□?

- A.** Wireless > Access Points > Global Configuration □□ Fastlane □ □□□□ □□□□□□.
- B.** □□ > □□□□ WMM TSPEC/TCLAS □□□ □□□□□□.
- C.** □ WLAN □□□□ Fastlane □ □□□□□□.
- D.** AUTOQOS-AVC-PROFILE □□□ □ AVC □□□□□ □□□□ □□ WLAN □ □□□□□.

Answer: C (LEAVE A REPLY)

https://www.cisco.com/c/dam/en/us/td/docs/wireless/controller/technotes/86/Enterprise_Best_Practices_for_iOS_devices_and_Mac_computers_on_Cisco_Wireless_LAN.pdf

NEW QUESTION: 66

□□□ □□□□□ □□□□ □□□ □□ □□□□ □□□□□□. □□□□ □□ WLC□□ NMSP□ □□ □□□□ □□□□ □□□ □□□□ □□□. AP□ □□□ □□□ □□□□□□ □□ CMX □□ □□ □□□ □
□□□ □□□. CMX□ □□ □□□ □ □□ □□□ □□□□□?

- A.** `cmxctl` ☐ ☐ ☐ ☐ `nmsplb.cmx-rssi-distribute` true
- B.** `cmxctl` ☐ ☐ ☐ ☐ `nmsplb.cmx-loadbalance` true
- C.** `cmxctl` ☐ ☐ ☐ ☐ `nmsplb.cmxgrouping` true
- D.** `cmxctl` ☐ ☐ ☐ ☐ `nmsplb.cmx-ap-grouping` true

Answer: C ([LEAVE A REPLY](#))

Step 1 Enable the Cisco **CMX Grouping feature** by entering this command: **cmxctl config feature flags nmsplb.cmxgrouping true**

Note To disable the feature, run the **cmxctl config feature flags nmsplb.cmxgrouping false** command.

NEW QUESTION: 67

□□□□□ Cisco Hyperlocation □□□ □□□□ □□□□ Cisco CMX□□ cmxloc □□ □□□ □□□□□. □□ □ □□□□□ □□□ □□□□? (□ □□□ □□□□□.)

- A.** X, Y □□ □□
B. □□□□□ □□
C. AP □□
D. □□□□□ MAC □□
E. WLC IP □□

Answer: ([SHOW ANSWER](#))

22

```
[cmxadmin@cmx ~]$ cmxloc start
MAC address: 40:98:ad:71:e8:b9
```

MAC Address	X	Y	Comp Type	Location	Last Located	Current Server Time
40:98:ad:71:e8:b9	23.87	30.08	FUSION	SJ>Cisco>Floor1	2018-07-13T20:01:29.942+0200	2018-07-13T20:01:31.760+0200

https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/88/b_ap_4800_hyperlocation_deployment_g

NEW QUESTION: 68

Cisco MSE □ □ LAN □ □ □ □ □ □ □ □ NMSP □ □ □ □ □ □ □ □ ?

- A.** 60□
- B.** 10□

- C. 15
- D. 30

Answer: C (LEAVE A REPLY)

NEW QUESTION: 69

Which two configuration parameters must be configured on the FlexConnect AP to enable it to connect to the WLC and receive configuration from the WLC? (Choose two.)

- A. WLC IP address and WLC port
- B. WLC IP address and WLC port
- C. WLC IP address and WLC port
- D. WLC IP address and WLC port

Answer: (SHOW ANSWER)

WLC IP address and WLC port
WLC IP address: http://www.cisco.com/c/en/us/td/docs/wireless/controller/7-2/configuration/guide/cg/cg_flexconnect.html

NEW QUESTION: 70

Which two configuration parameters must be configured on the FlexConnect AP to enable it to connect to the WLC and receive configuration from the WLC? (Choose two.)

- A. WLC IP address and WLC port
- B. 802.3x and WLC IP address
- C. IGMP and WLC IP address
- D. IGMP and WLC IP address
- E. AP IP address 238.255.255.255 and WLC IP address

Answer: A,C (LEAVE A REPLY)

NEW QUESTION: 71

Which two configuration parameters must be configured on the FlexConnect AP to enable it to connect to the WLC and receive configuration from the WLC? (Choose two.)



Which two configuration parameters must be configured on the FlexConnect AP to enable it to connect to the WLC and receive configuration from the WLC? (Choose two.)

- A. Cisco WLC IP address and WLC port
- B. Cisco WLC IP address and WLC port
- C. Cisco WLC IP address and WLC port
- D. Cisco WLC IP address and WLC port

Answer: (SHOW ANSWER)

NEW QUESTION: 72

Cisco DNA Center can support up to _____ Cisco Aironet Active Sensor APs per Cisco DNA Center node.

- A. 3800
- B. 1800
- C. 3600e
- D. 4800i

Answer: B (LEAVE A REPLY)

NEW QUESTION: 73

Which of the following is a benefit of using Cisco CMX for social media integration? _____

- A. It allows for the integration of social media feeds into the network.
- B. Google+ integration is supported.
- C. It provides a central location for social media data.
- D. It allows for the integration of social media feeds into the network.

Answer: (SHOW ANSWER)

- Facebook Wi-Fi: Allows the administrator of a facility to enable the facility's Facebook page as a free Wi-Fi hotspot for visitors. Allows visitors to access free Wi-Fi after accessing the facility's Facebook page. Provides insight into a facility's customer base through demographic reports.

NEW QUESTION: 74



Which WLAN QoS mechanism is used for VoWLAN traffic? (Choose two.)

- A. TSPEC
- B. SIFS
- C. 802.11e
- D. WMM
- E. APSD

Answer: (SHOW ANSWER)

Cisco Unified Wireless products support WMM, a QoS system based on IEEE 802.11e that has been published by the Wi-Fi Alliance, and WMM Power Save, as well as Admission Control.

NEW QUESTION: 75

Which Cisco ISE feature is used for BYOD devices? (Choose two.)

- A. Guest Network
- B. Guest Network
- C. Guest Network
- D. Guest Network

Answer: B (LEAVE A REPLY)

NEW QUESTION: 76

Which Cisco vMSE feature is used for BYOD devices? (Choose two.)

- * Cisco CMX
- * 3000 APs
- * 6000 wIPS

Cisco vMSE is used for BYOD devices. Which Cisco vMSE Release 8 feature is used for BYOD devices?

- A. vMSE

- B. 1000 vMSE
C. 10 vMSE
D. 1000 vMSE

Answer: D (LEAVE A REPLY)

10

Cisco MSE Model	Location	wIPS
MSE 3365 (physical appliance)	5000 APs	10000 APs
MSE 3355 (physical appliance)	2500 APs	6000 APs
High-End MSE virtual appliance (vMSE)	5000 APs	10000 APs
Standard vMSE	2500 APs	6000 APs
Low-End vMSE	200 APs	2000 APs

1000 1000 1000 10

300-430 10 1000 100000 10 DumpTop 10 10000 1000 300-430 10! DumpTop 1 10 300-430 10 1000 1000000, DumpTop 300-430 10 1000 100000000 1000 1000000
1. 10000 1000 10000 10 DumpTop 300-430 1000 100000. <https://www.dumptop.com/Cisco/300-430-dump.html> (355 Q&As Dumps, 30%OFF Special Discount: KrDump)

NEW QUESTION: 77

Cisco Context Aware Services 10 1000 1000 1 10000?

- A. Cisco 10 10 10
B. 10 10
C. 10 10
D. 10 1 10 10

Answer: D (LEAVE A REPLY)

Q. What devices can be tracked with the Cisco Context Aware Services?

A. The Cisco Context-Aware Services allows you to track and locate IP enabled devices both wired and wireless with the Cisco Unified Wireless Network and Wired network.

<https://www.cisco.com/c/en/us/support/docs/wireless/context-aware-software/110836-cas-faq.html>

NEW QUESTION: 78

10000 1000000.

- A.** ☐☐ ☐☐
- B.** ☐☐ EAP
- C.** ☐☐ ☐☐
- D.** Cisco ☐☐ ☐☐☐ ☐ ☐☐

Answer: B (LEAVE A REPLY)

Local EAP

Local EAP is an authentication method that allows users and wireless clients to be authenticated locally. It is designed for use in remote offices that want to maintain connectivity to wireless clients when the backend system becomes disrupted or the external authentication server goes down. When you enable local EAP, the controller serves as the authentication server and the local user database, which removes dependence on an external authentication server. Local EAP retrieves user credentials from the local

NEW QUESTION: 81

□□ □□□□□ □□□□□ □□□ □□□□ □□□. □□□□ □□ □□□ □□□ □□□□ □ □□□□ □□□ □□□□□?

- A.** □ □ □ □ □ □
- B.** □ □ □ □
- C.** □ □ □ □ □ □
- D.** □ □ □

Answer: D (LEAVE A REPLY)

Angle of Arrival (AoA)

The *Angle of Arrival (AoA)* technique, sometimes referred to as *Direction of Arrival (DoA)*, locates the mobile station by determining the *angle of incidence* at which signals arrive at the receiving sensor. Geometric relationships can then be used to estimate location from the intersection of two

NEW QUESTION: 82

□□□□□ □□ □□□ □□ □□□ □□□□ CLI□ □□□□ □□□□ □□□□ □□□. WLC□ □□ □□□ □ □□□ □□□□□?

- A.** □□ □□ □□□ □□
B. □□□□ □□□ □□□ □□
C. □ □□ □□ □□
D. SNMP V3 □□□

Answer: A (LEAVE A REPLY)

https://www.cisco.com/c/en/us/td/docs/wireless/controller/7-4/configuration/guides/consolidated/b_cg74_CONSOLIDATED/b_cg74_CONSOLIDATED_chapter_01101011.html

NEW QUESTION: 83

この無線LANのSSIDは「Roque AP」です。SSL/ATCのポート番号は(例: ATC302, ATC011, ATC566)。この無線LANのSSIDは「Roque AP」です。SSL/ATCのポート番号は(例: ATC302, ATC011, ATC566)。

friendly

malicious

set substring-ssid to ATC

set SSID value to ATC

external

internal

Type

State

Condition

Answer:

friendly

malicious

set substring-ssid to ATC

set SSID value to ATC

external

internal

Type

State

Condition

□□
□□□□□□□□□□



NEW QUESTION: 84

Which QoS policy is applied to 802.1x authenticated WLAN traffic? Which WLAN type is used for BYOD traffic? Which Cisco Jabber traffic is marked as Platinum? Which QoS policy is applied to Silver Jabber traffic? Which Platinum traffic is marked as Silver?

- A. Jabber traffic is marked as Silver.
- B. 5GHz traffic is marked as Silver.
- C. Jabber traffic is marked as Silver.
- D. Jabber traffic is marked as Silver.

Answer: (SHOW ANSWER)

CC

When Jabber traffic reaches the wireless controller, the controller performs deep packet inspection to recognize the flow. If the flow is recognized as an application part of the AVC profile, the traffic is marked according to the AVC policy. For example, in situations where a wireless client sends unmarked Jabber traffic, this traffic upon reaching the WLAN Controller would get

https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/81/Jabber_in_WLAN/b_Jabber_in_WLAN.

NEW QUESTION: 85

Which Cisco Prime Infrastructure feature is used to monitor and manage the health of the network? Which Cisco Prime Infrastructure feature is used to monitor and manage the health of the network? Which Cisco Prime Infrastructure feature is used to monitor and manage the health of the network? Which Cisco Prime Infrastructure feature is used to monitor and manage the health of the network?

- A. Cisco Prime Infrastructure CleanAir
- B. Cisco Prime Infrastructure CleanAir
- C. Cisco Wireless LAN Controller
- D. Cisco Wireless LAN Controller

Answer: B (LEAVE A REPLY)

<https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/Apr2014/CVD-CampusCleanAirDesignGuide-APR14.pdf>

NEW QUESTION: 86

Which Cisco WLC feature is used to monitor and manage the health of the network? Which Cisco WLC feature is used to monitor and manage the health of the network? Which Cisco WLC feature is used to monitor and manage the health of the network? Which Cisco WLC feature is used to monitor and manage the health of the network?

- A. ACL
- B. WMM
- C. WMM

D. 100%

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 87

Which SSID can be used to connect to a Cisco AP in a secure mode?

- A. 1
- B. 2
- C. 3
- D. 4

Answer: D ([LEAVE A REPLY](#))

URL: https://www.cisco.com/c/en/us/td/docs/wireless/technology/roguedetection_deploy/Rogue_Detection.html

NEW QUESTION: 88


Which Cisco Prime Infrastructure feature can be used to monitor Client Traffic Stream Metrics?

- A. 100%
- B. 100%
- C. 100%
- D. 100%

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 89

Which feature can be used to monitor Client Traffic Stream Metrics?

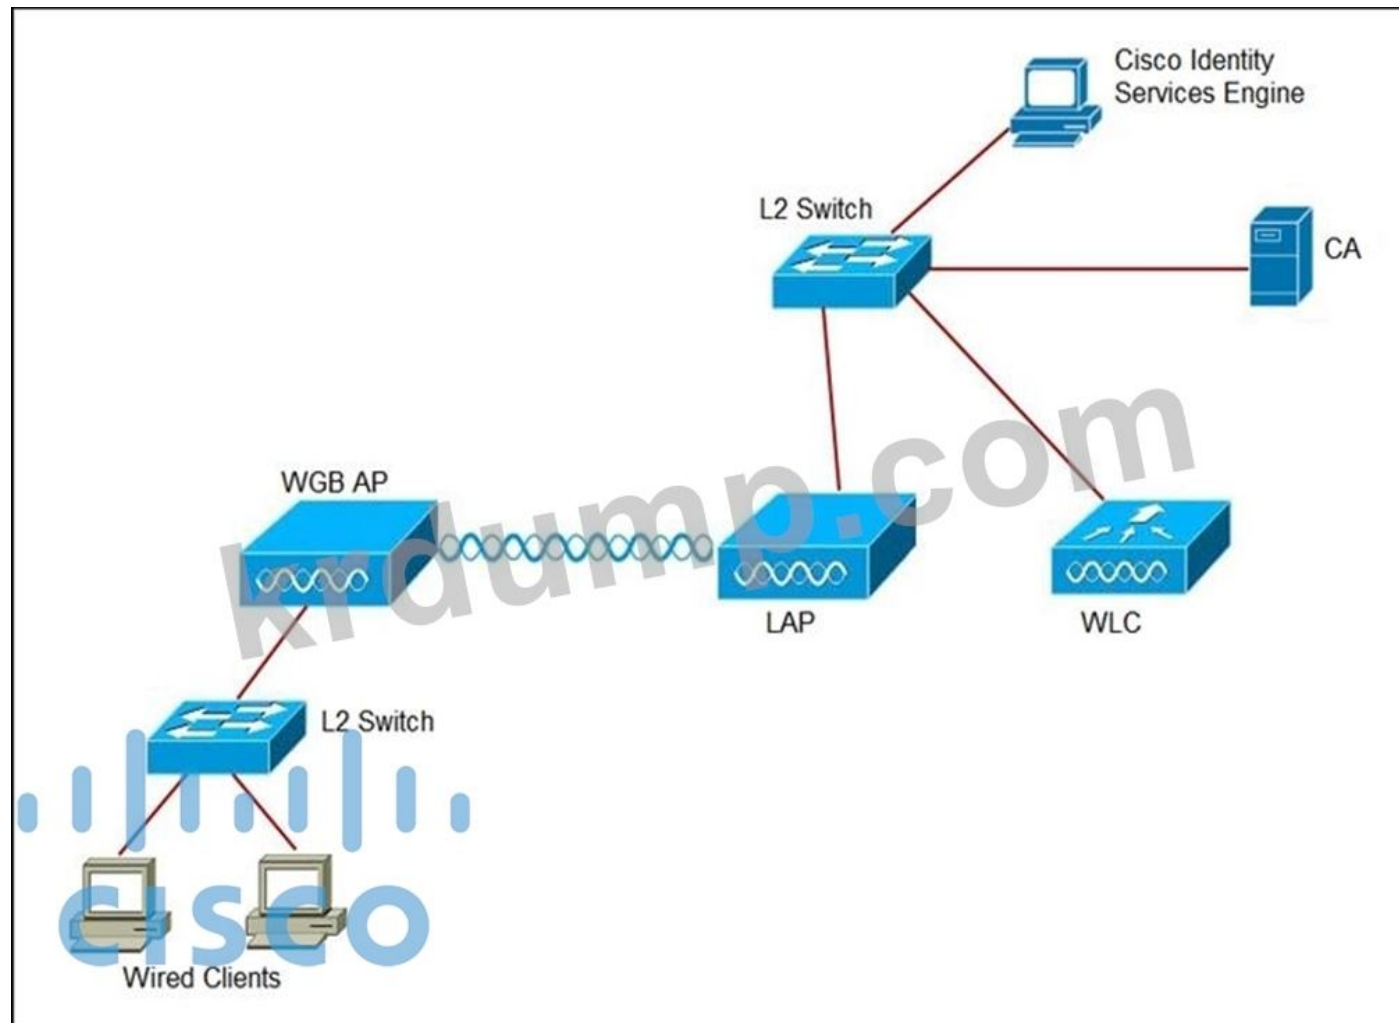

Which of the following is the correct configuration for the WGB AP to connect to the ISE? (3 correct answers.)

- A. WGB AP, WLAN, and ISE are configured with the same IP address.
- B. WLC is configured with the same IP address as the WGB AP.
- C. ISE is configured with the same IP address as the WLAN.
- D. ISE is configured with the same IP address as the WLC.
- E. ISE is configured with the same IP address as the WGB AP.
- F. ISE is configured with the same IP address as the WLAN.

Answer: (SHOW ANSWER)

CC

<https://mrncciew.com/2018/05/25/wgb-with-peap/>

NEW QUESTION: 90

Which of the following is the correct configuration for the WGB AP to connect to the ISE? (3 correct answers.)



- 



- 



300-430   DumpTop   300-430 ! DumpTop   **300-430**   , DumpTop 300-430     <

NEW QUESTION: 92

□□□□ □□□□ 500□□ AP□ □□ □□□□□□ □□□□□□ □□□□ □ □□□□ CPU □□□□ □ □□ □□□□ □□□□ □□□□ □□ □□□□□□. □□ □□□ □□□ □□□□□□?

- A.** □□□□ IGMP □□□
- B.** □□□□□ AP □□□□□ □□
- C.** □□□□□ AP □□□□□ □□
- D.** □□□□□□ □□□

Answer: C (LEAVE A REPLY)

NEW QUESTION: 93

□□□□□□□□ □□□ MSE □□□ □□□□ □□ □□□□ □□□□□□ □□□□□□. MSE□ Cisco WLC□ □□ □□□□□ □□□□ □□□. □□□ NMSP□ □□ □□□ □ □□□ □□□□ □□□ □□□□□?

- A.** ☐ ☐ ☐ ☐ ☐ TCP/16666 ☐ ☐ ☐ ☐ ☐.
- B.** VPN ☐ ☐ ☐ ☐ ☐ UDP/16666 ☐ ☐ ☐ ☐ ☐.
- C.** ☐ ☐ ☐ ☐ ☐ ☐ UDP/16113 ☐ ☐ ☐ ☐ ☐.
- D.** ☐ ☐ ☐ ☐ ☐ TCP/16113 ☐ ☐ ☐ ☐ ☐.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 94

[illegible]

- A.** WLAN □ □ □ □ Platinum QoS
- B.** □ □ □ □ □ □ □ □ mls qos trust dscp
- C.** WLAN □ □ □ □ WMM
- D.** □ □ □ □ □ □ □ □ mls qos trust cos

Answer: B (LEAVE A REPLY)

On trusting the AP DSCP values, the access switch is simply trusting the policy set for that AP by the WLC. The maximum DSCP value assigned to client traffic is based on the QoS policy applied to the WLANs on that AP.

NEW QUESTION: 95

```

000000 WLAN 0000 0000 0000 0000 0000 0000 0000 0000. 0 0000 000000 00 Cisco CMX 0000 000000 000000 0000?

```

- A.** □ □
- B.** □ □ □ □ □
- C.** □ □
- D.** □ □ □ □ □ □ □ □

Answer: ([SHOW ANSWER](#))


- **PRESENCE ANALYTICS:** Cisco Presence Analytics service is a **new analytics engine that detects the presence of visitors via** their mobile devices interactions with even a single network access point. The probe requests which are transmitted from the wireless devices provide information, which is used to identify the general

NEW QUESTION: 96

Which of the following is not a feature of Cisco Office Extend AP (OEAP600)?

- A. AAA support
- B. Support for 802.11n
- C. Support for LAN ACL
- D. Support for LAN

Answer: D (LEAVE A REPLY)

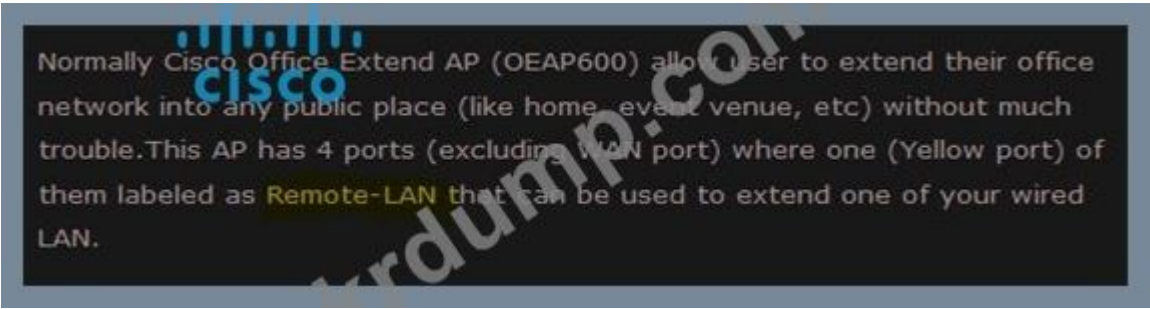

NEW QUESTION: 97

Which of the following is not a feature of Cisco Prime Infrastructure? (Choose two)

- A. Support for AP
- B. Support for Rogue AP
- C. Support for AP
- D. Support for AP

Answer: C (LEAVE A REPLY)

NEW QUESTION: 98

Which of the following is not a feature of Cisco Prime Infrastructure Client Traffic Stream Metrics? (Choose two)

- A. Support for
- B. Support for
- C. Support for
- D. Support for

Answer: C (LEAVE A REPLY)

NEW QUESTION: 99

Which of the following is not a feature of Cisco Prime Infrastructure? (Choose two)

- A. 224.0.0.13
- B. 224.0.0.14
- C. 224.0.1.39
- D. 224.0.1.40

Answer: D (LEAVE A REPLY)

224.0.1.39	cisco-rp-announce
224.0.1.40	cisco-rp-discovery

NEW QUESTION: 100

Which of the following is a supported authentication protocol for Cisco ISE? (Choose two.)

- A. Novell eDirectory
- B. LDAP
- C. SAML
- D. Solaris Kerberos

Answer: B (LEAVE A REPLY)

NEW QUESTION: 101

Which of the following is a supported authentication protocol for Cisco ISE? (Choose two.)

- A. WLC
- B. RADIUS
- C. TACACS+
- D. Kerberos
- E. LDAP

Answer: C,D (LEAVE A REPLY)

NEW QUESTION: 102

Which of the following is a supported authentication protocol for Cisco ISE? (Choose two.)

- A. Solaris Kerberos
- B. LDAP
- C. SAML
- D. Novell eDirectory

Answer: B (LEAVE A REPLY)

when you want to Match Client Certificate Against Certificate In Identity Store. For this you must select an identity source (LDAP or Active Directory.)

NEW QUESTION: 103

Which of the following is a supported authentication protocol for Cisco ISE? (Choose two.)

- A. CAC
- B. DSCP
- C. QoS
- D. WMM

Answer: B (LEAVE A REPLY)

The QoS implementation on wireless LANs differs from QoS implementations on wired networks. With QoS enabled, bridges:

- Do not classify packets; they prioritize packets based on differentiated services code point (DSCP) value, client type (such as...

NEW QUESTION: 104

Which of the following is a supported authentication protocol for Cisco ISE? (Choose two.)

friendly	Type
malicious	
set substring-ssid to ATC	State
set SSID value to ATC	
external	Condition
internal	

Answer:

friendly	Type
malicious	malicious
set substring-ssid to ATC	State
set SSID value to ATC	external
external	Condition
internal	set SSID value to ATC

NEW QUESTION: 105

BYOD □□ SSID □□□ □□□ □ □□□ □□ □□□□□?

- A. □□ WLC□ □□□□ □□ □□□□□□ □□□□□□ □□□□ □□□□□ WLAN ID□ □□□□ □□□.
- B. □□□ SSID□ □□□□□□□□ □□ SSID□ □□□□□ □□□□□ □□ □□□□. □□□□□ □ □□□□□□ REAL SSID□ □□□□□ ACL□ □□□□□ □□□□□ □ □□□.
- C. □□□□□ SSID□ □□□ □ □□□□□ □□□ SSID□ □□□ □ □□□ ACL□ □□□□ MAC □□□□ □□ □□□□□ □□□□ □□□□□□□ □□□□□.
- D. □ □□□ SSID□ □□□□□□□ Cisco ISE□ □□□ □ □□□ NAC State-RADIUS NAC□ □□□□□□ Cisco ISE□ □□□□□□ □□□ □ □□□ NAC State-ISE NAC□ □□□□ □□□.

Answer: B (LEAVE A REPLY)

Centralized Campus–Dual SSID Design

In this design there are two SSIDs: one provides enrollment/provisioning and the other provides secure network access.

NEW QUESTION: 106

Cisco Context Aware Services□ □□ □□□ □□□ □ □□□□?

- A. □□ □ □□ □□
- B. □□ □□

- C. 100 100
- D. Cisco 100 100 100

Answer: (SHOW ANSWER)

100

Q. What devices can be tracked with the Cisco Context Aware Services?

A. The Cisco Context-Aware Services allows you to track and locate IP enabled devices both wired and wireless with the Cisco Unified Wireless Network and Wired network.

<https://www.cisco.com/c/en/us/support/docs/wireless/context-aware-software/110836-cas-faq.html>

300-430 100 1000 100000 100 DumpTop 100 10000 1000 300-430 100! DumpTop 1 100 **300-430** 100 1000 10000000, DumpTop 300-430 100 1000 1000000000 1000 10000000

1. 10000 1000 10000 100 DumpTop 300-430 1000 100000. <https://www.dumptop.com/Cisco/300-430-dump.html> (355 Q&As Dumps, **30%OFF** Special Discount: **KrDump**)

NEW QUESTION: 107

10000 100000 WLC100 LAG1 100000 1 1000 10000. LAG 1000 10000 100 10000 100 1 100 1000 100000? (1 1000 100000.)

- A. 1000000 LAG1 100000 100000 100 1000 LAG1 100000. 100
- B. 100 100000 1 1000 100 10 1000
- C. 1 1000000 100 1 100 1000 100000.
- D. 1000 1000 100 1000 100000 100 100 10000000 10000 10000.
- E. EtherChannel1 100000 100 "on"100 100000 1000.
- F. 10000 100 100000 10000 1000 1000 1000 100000.
- G. 1000000 100 LAG1 100000.
- H. LAG 1000 100000 100 WLC1 100000 1000 10000.

Answer: A,D,E,F (LEAVE A REPLY)

http://www.cisco.com/c/en/us/td/docs/wireless/controller/7-4/configuration/guides/consolidated/b_cg74_CONSOLIDATED/b_cg74_CONSOLIDATED_chapter_0100011.html

NEW QUESTION: 108

IT 1000 10000 10000 100 1000 100 100000 MAC 1000 100 1000 1000 10000. 1000 10000 100 100 100000 10000 100 1 100 1000 100000? (1 1000 100000.)

- A. MSE100 10000 100 1000 100000 1000.
- B. MS100 1000000 100 1000 100000 1000.
- C. WL100 100 10000 100000 1000.
- D. Rogue AP 1 Rogue 1000000 100 100 1000 MSE100 1000000 1000.
- E. MSE100 100000 100 1000 100000 1000.

Answer: (SHOW ANSWER)

NEW QUESTION: 109

1000000 100 1000 100 1000 1000 EIGRP 1 BGP1 10000 10000000 100 100 100 1000 100 1000 10000000 10000 10000. 100 1000 1000000 10000 10000 1000?

- A. 10000 1000 1000000 100 100
- B. 100 100 100000
- C. 1000000 100 100 10000
- D. 10000 1000 1000000 1000 100

Answer: (SHOW ANSWER)

PIM in Source Specific Multicast (PIM-SSM) is similar to PIM-SM with the additional ability to report interest in receiving packets from specific source addresses (or from all but the specific source addresses) to an IP multicast address.

NEW QUESTION: 110

Which two components are required for a WLAN to be able to connect to a WLC, Cisco MSE or Cisco Prime Infrastructure? (Choose two.)

- A. WLC
- B. WLC
- C. Cisco Prime Infrastructure
- D. Cisco Prime Infrastructure

Answer: (SHOW ANSWER)

NEW QUESTION: 111

Which two protocols are used by a WLC to communicate with an AP? (Choose two.)

- A. HTTP
- B. HTTPS
- C. 802.1X
- D. RADIUS

Answer: (SHOW ANSWER)

NEW QUESTION: 112

Which two ports are used by a WLC to communicate with an AP? (Choose two.)

- A. UDP/16113
- B. TCP/16666
- C. TCP/16113
- D. VPN UDP/16666

Answer: C (LEAVE A REPLY)

The TCP port (16113) that the controller and mobility services engine communicate over MUST be open (not blocked) on any firewall that exists between the controller and mobility services engine.

https://www.cisco.com/en/US/docs/wireless/mse/3350/6.0/CAS/configuration/guide/msecg_ch4_CAS.html

NEW QUESTION: 113

Which two components are required for a WLC to be able to connect to a WLC, Cisco MSE or Cisco Prime Infrastructure? (Choose two.)

- A.
- B.
- C.
- D.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 114

Which two are valid BYOD security considerations? (Choose two.)

- A. Disable Wi-Fi
- B. Disable Bluetooth
- C. Disable USB
- D. Disable NFC
- E. Disable NFC

Answer: B,C (LEAVE A REPLY)

NEW QUESTION: 115

FlexConnect is configured on a Cisco 2702i AP. The AP is configured with FlexConnect. Which two FlexConnect configurations are valid? (Choose two.)

- A. 1
- B. 2
- C. 5
- D. 7

Answer: (SHOW ANSWER)

1

"FlexConnect is configured on a Cisco 2702i AP. The AP is configured with FlexConnect. Which two FlexConnect configurations are valid? (Choose two.)"

NEW QUESTION: 116

PIM is configured on a Cisco 2702i AP. Which two PIM configurations are valid? (Choose two.)

- A. PIM is configured on a Cisco 2702i AP. Which two PIM configurations are valid? (Choose two.)
- B. PIM is configured on a Cisco 2702i AP. Which two PIM configurations are valid? (Choose two.)
- C. PIM is configured on a Cisco 2702i AP. Which two PIM configurations are valid? (Choose two.)
- D. PIM is configured on a Cisco 2702i AP. Which two PIM configurations are valid? (Choose two.)

Answer: A (LEAVE A REPLY)

https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/ipmulti_pim/configuration/xe-16/imc-pim-xe-16-book/imc-tech-oview.html

1. https://community.caliX.com/s/article/Dense-Mode-Multicast-vs-Sparse-Mode-Multicast-1

NEW QUESTION: 117

Which two are valid BYOD security considerations? (Choose two.)



Which two are valid BYOD security considerations? (Choose two.)

- A. Cisco WLC can VLAN configuration can be done. ISE can be configured.
- B. Cisco WLC can DHCP configuration.
- C. Cisco WLC can DHCP configuration VLAN configuration ip helper-address can be configured DHCP can be configured ISE can be configured.
- D. Cisco WLC can DHCP configuration can be configured ISE can be configured VLAN configuration helper-address can be configured.

Answer: C (LEAVE A REPLY)

https://www.cisco.com/c/en/us/support/docs/wireless/4400-series-wireless-lan-controllers/110865-dhcp-wlc.html

NEW QUESTION: 118

FlexConnect can be configured on WLC. WLC can AP can be configured SSID can be configured WLAN can VoWiFi WLAN can be configured. QoS can be configured?

- A. DSCP can be configured.
- B. QoS can be configured.
- C. WMM can be configured.
- D. CAC can be configured.

Answer: (SHOW ANSWER)

NEW QUESTION: 119

FlexConnect AP can be configured on WLC. FlexConnect can be configured SSID can be configured. FlexConnect can be configured?

- A. FlexConnect can be configured.
- B. 802.11r can be configured.
- C. can be configured.
- D. ISE NAC can be configured.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 120

can be configured.



WLC can be configured. CPU ACL can be configured. ACL can be configured.

- A. can be configured GUI can be configured CLI can be configured.
- B. can be configured ACL can be configured.
- C. ACL can be configured.
- D. ACL can be configured CPU ACL can be configured.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 121

WLAN can be configured. AP can be configured. AP can be configured.

- A. Ap 11: 11, Ap 11 11: WIPS
- B. Ap 11: 111, Ap 11 11: WIPS
- C. Ap 11: 111, Ap 11 11: 11
- D. Ap 11: 11, Ap 11 11: 11

Answer: (SHOW ANSWER)

The regular local mode or FlexConnect mode AP is extended with a subset of wIPS capabilities. This feature enables you to deploy your APs to provide protection without needing a separate overlay network.

300-430 11 111 11111 11 DumpTop 11 1111 111 300-430 11! DumpTop 1 11 300-430 11 111 1111111, DumpTop 300-430 11 111 11111111 111 1111111 11. 1111 111 1111 11 DumpTop 300-430 111 111111. <https://www.dumptop.com/Cisco/300-430-dump.html> (355 Q&As Dumps, 30%OFF Special Discount: KrDump)

NEW QUESTION: 122

Cisco Catalyst 9800 Series Wireless Controller 1 1111111 Cisco Hyperlocation1 1111 1111111?

- A. 11 111
- B. AP 11 111
- C. 111 111
- D. RF 111

Answer: B (LEAVE A REPLY)

11



https://www.cisco.com/c/en/us/td/docs/wireless/controller/9800/config-guide/b_wl_16_10_cg/cisco-hyperlocation

NEW QUESTION: 123

11111 111 1111 11 1 11 11111 1111 1111. 111 1111 11111 11111 11 111 Facebook 1111 111 111. Cisco MSE1 11 11 111 111111. 1111 11 1111 URL1 1111 11 URL1 111111?

- A. http://<MSE>:8084/visitor/login.do
- B. http://<MSE>:8083/visitor/login.do
- C. http://<MSE>:8084/fbwifi/forward
- D. http://<MSE>:8083/fbwifi/forward

Answer: C (LEAVE A REPLY)

NEW QUESTION: 124

1111 1111111.

Access Control Lists > Rules > New

Sequence

Source

Destination

Protocol

DSCP

Direction

Action

Which of the following is the correct configuration for a new rule in the Cisco Hyperlocation configuration page?

- A. Cisco Hyperlocation configuration page.
- B. Cisco Hyperlocation configuration page.
- C. Cisco Hyperlocation configuration page.
- D. Cisco Hyperlocation configuration page.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 125

Cisco Hyperlocation is a feature that allows you to configure the location of a device. Cisco Hyperlocation is a feature that allows you to configure the location of a device. Cisco Hyperlocation is a feature that allows you to configure the location of a device. Cisco Hyperlocation is a feature that allows you to configure the location of a device.

- A. Cisco Hyperlocation is a feature that allows you to configure the location of a device.
- B. Cisco Hyperlocation is a feature that allows you to configure the location of a device.
- C. Cisco Hyperlocation is a feature that allows you to configure the location of a device.
- D. Cisco Hyperlocation is a feature that allows you to configure the location of a device.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 126

CMX Facebook Wi-Fi is a feature that allows you to configure the location of a device. CMX Facebook Wi-Fi is a feature that allows you to configure the location of a device. CMX Facebook Wi-Fi is a feature that allows you to configure the location of a device. CMX Facebook Wi-Fi is a feature that allows you to configure the location of a device.

- A. CMX Facebook Wi-Fi is a feature that allows you to configure the location of a device.
- B. CMX Facebook Wi-Fi is a feature that allows you to configure the location of a device.
- C. CMX Facebook Wi-Fi is a feature that allows you to configure the location of a device.
- D. CMX Facebook Wi-Fi is a feature that allows you to configure the location of a device.

E. SNMP traffic is blocked before authentication.

Answer: (SHOW ANSWER)

The following are the different options to choose for access before authentication:

- Allow HTTPs traffic only before authentication and block all the traffic:
 - To do this, click the sequence number whose Source Port or Dest Port has the value HTTPs. The Access Control Lists > Rules > Edit page appears and you can select Permit from the Action drop-down list and click Apply.
- Allow all the traffic before authentication and intercept HTTP only:
 - To intercept HTTP, click the sequence number whose Source Port or Dest Port has the value HTTP. The Access Control Lists > Rules > Edit page appears and you can select Deny from the Action drop-down list and click Apply.

NEW QUESTION: 127

Which two statements are true?

Access Control Lists > Rules > New

Sequence

Source

Any

Destination

Any

Protocol

Any

DSCP

Any

Direction

Any

Action

Any

Inbound

Outbound

Which two statements are true regarding WLC CPU ACLs?

- A. WLCs can filter traffic to and from the CPU.
- B. WLCs can filter traffic to and from the CPU. Any traffic to the CPU is blocked.
- C. WLCs can filter traffic to and from the CPU. Outbound traffic is blocked.
- D. WLCs can filter traffic to and from the CPU. CPU ACLs are applied to the CPU.

Answer: A (LEAVE A REPLY)

- CPU ACLs only filter traffic towards the CPU, and not any traffic exiting or generated by the CPU.

NEW QUESTION: 128

Which two statements are true regarding VLANs and QoS?

- A. DSCP
- B. WMM UP
- C. IP
- D. IPP

Answer: A (LEAVE A REPLY)

NEW QUESTION: 129

□□□□□□ □□□□□□ □□ □□□ □□□□□□ □□ □□□□ □□ □□□□ □□□ □□□ □□□□ □□□□ □□□. □□□ □□□□□ □□□□ Cisco Prime Infrastructure □□□□ □□□□□?

- A.** □□□□□ □□
- B.** □□□□□ □□□ □□□ □□
- C.** □□ □□ □□□
- D.** □□□ □□□□□ □□

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 130

□□□□ □□□□□□.

Access Control Lists > Rules > New

Sequence	
Source	Any
Destination	Any
Protocol	Any
DSCP	Any
Direction	Any
Action	Any Inbound Outbound

□□□□□ □□ □□□□ WLC CPU□ □□□□ □□ ACL□ □□□□ □□□□. □□ □□□□ □□□□ □□□□ □□ □□□ □□□□□?

- A.** WL00 0000 000000 Outbound00 0000.
- B.** 0000 WLC0 0000 000 000000 000.
- C.** 00 00 000 000 CPU ACL0 CLI00 0000 0000.
- D.** 00 000 000 0000. 00 Any000.

Answer: B (LEAVE A REPLY)

- CPU ACLs only filter traffic towards the CPU, and not any traffic exiting or generated by the CPU.

NEW QUESTION: 131

□□□ AP□□ □□□ □□ AP□ □□□□□ □□□□□ □□□□□ □□□□□. □ □□□□ □□□□□□□□□□□□?

- A.** □□□□□ □□□ □□ AP□ □□□□□.
- B.** □□□ □□□□□ □□□ □□□□□□□.
- C.** □□□□□ □□□ □□□ VLAN□ □□□□□□□□.
- D.** □□□□□ IGMP □□□□ □□□□□ □□

Answer: D (LEAVE A REPLY)

11

https://www.cisco.com/c/en/us/td/docs/wireless/controller/74/configuration/guides/consolidated/b_cg74_CONSO

NEW QUESTION: 132

□□□□ WLAN□□ □□ □□□ □□□□ QoS □□□□ □□□□□□ WebEx□ □□□□□ □□□.

☐ ☐☐☐ ☐☐☐☐☐☐ ☐☐ ☐☐☐☐☐☐

- A. WebEx□ WLAN □□ □□□ □□
- B. WebEx□ AVC □□□ □□
- C. WebEx□ ACL □□
- D. AVC □□□□□□ WebEx-app-sharing□ □□□ □□

Answer: B (LEAVE A REPLY)

□□

https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/7-5/AVC_dg7point5.html

NEW QUESTION: 133

□□ □□□□□□ □□□ MSE □□□ □□□□ □□ □□□□ □□□□□□. MSE□ Cisco WLC□ □□ □□□□□ □□□□ □□□. □□□ NMSP□ □□ □□□ □ □□□ □□□□ □□□ □□□□□□?

- A. □□ □□□□□ UDP/16113 □□□ □□□□□.
- B. □□□□□ TCP/16666 □□□ □□□□□.
- C. □□□□□ TCP/16113 □□□ □□□□□.
- D. VPN □□□□□ UDP/16666 □□□ □□□□□.

Answer: C (LEAVE A REPLY)

□□

• The TCP port (16113) that the controller and mobility services engine communicate over MUST be open (not blocked) on any firewall that exists between the controller and mobility services engine.

https://www.cisco.com/en/US/docs/wireless/mse/3350/6.0/CAS/configuration/guide/msecg_ch4_CAS.html

NEW QUESTION: 134

□□□□□ □□□□ AP □□□ □□□□ □□□□□ □□□□□ Cisco Catalyst 9800 Series Wireless Controller□ □□□□ □□ □□□ □□□□□?

A. config terminal
wireless profile policy [policy name]
local switching
end

B. config terminal
wireless flexconnect policy [policy name]
local switching
end

C. config terminal
wireless flexconnect policy [policy name]
no central switching
end

D. config terminal
wireless profile policy [policy name]
no central switching
end

- A. □□ D
- B. □□ A

C. □□ B

D. $\square\square$ C

Answer: C (LEAVE A REPLY)

NEW QUESTION: 135

Cisco Catalyst 9800 Series ☐☐ ☐☐☐☐☐☐ Cisco OEAP ☐ ☐☐☐☐☐☐☐ ☐☐☐☐?

A. RF ☐☐☐

B. ☐☐☐ ☐☐☐☐

C. ☐☐ ☐☐☐

D. AP ☐☐ ☐☐☐

Answer: B (LEAVE A REPLY)

□□/□□: https://www.cisco.com/c/en/us/td/docs/wireless/controller/9800/config-guide/b_wl_16_10_cg/flexconnect.html

NEW QUESTION: 136

□□□□□□ WLAN□ □□ □□□ □□□□ □□□. AP □□□□□□ □□□□ □□□ □□□ □□ □□□□□□□. □□□ □□□□□□□ AP □□□□□□□□□□. □□ Ap □□□ □□ □□□ □□□□ □□□□ □□□□?

A. Ap □□: □□, Ap □□ □□: WIPS

B. Ap □□: □□□, Ap □□ □□: WIPS

C. Ap □□: □□□, Ap □□ □□: □□

D. Ap □□: □□, Ap □□ □□: □□

Answer: D ([LEAVE A REPLY](#))

The regular local mode or FlexConnect mode AP is extended with a subset of WIPS capabilities. This feature enables you to deploy your APs to provide protection without needing a separate overlay network.

300-430     **300-430**        

NEW QUESTION: 137

□□□ WLC□ □□□ □□□ □□ □□□ □□ □□ □□□ □□□ □□□□.

□□ □□□ □□□ □□□ □□ □□□ □□ WLAN□□ □□ □□□□

"Corp-401266017" 000000 0000 00 0000 WLAN "Guest-19283746" 00000 0 00000 0000 00000000 0000 00000 0000. 0 0000 0000 0000 0000000?

A. □□ □ □□ WLAN□ □□ □□ □□□ □□□□□□□.

B. □□ WLAN□ □□ □□ □□□ □□□□□ □□□ WLAN□ □□ □□□□□□□□.

C. □□ WLAN□ □□ □□ □□□ □□□□□□ □□□ WLAN□ □□ □□□□□□.

D. ☐☐ ☐ ☐☐ WLAN ☐ ☐ ☐ ☐ ☐ ☐☐☐.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 138

□□□□□□ □□ □□□ □□ □□□ □□□ EIGRP □ BGPP □□□□ □□□□□□ □□ □□ □□ □□ □□ □□ □□□□□□ □□□□ □□□□. □□ □□□ □□□□□□ □□□□ □□□□ □□□□?

- A. ☐ ☐ ☐ ☐ ☐ ☐
- B. ☐ ☐ ☐ ☐ ☐ ☐
- C. ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
- D. ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 139

Which of the following is a requirement for Cisco Aironet 600 Series OfficeExtend APs to connect to a Cisco WLC?

- A. ☐ ☐ ☐
- B. ☐ ☐ ☐ ☐
- C. SE-☐
- D. AP ☐ ☐ ☐ ☐

Answer: A [\(LEAVE A REPLY\)](#)

This section details the requirements for configuring a Cisco wireless LAN controller for use with the Cisco 600 Series OfficeExtend Access Point. The 600 Series OfficeExtend Access Point supports split mode operation, and it requires configuration through the WLAN controller in local mode.

NEW QUESTION: 140

Which of the following is a requirement for Cisco Aironet 600 Series OfficeExtend APs to connect to a Cisco WLC?

- A. ☐ ☐ ☐ ☐ msl qos trust dscp
- B. ☐ ☐ ☐ ☐ msl qos trust cos
- C. WLAN ☐ ☐ Platinum QoS
- D. WLAN ☐ ☐ ☐ WMM

Answer: A [\(LEAVE A REPLY\)](#)

NEW QUESTION: 141

Which of the following is a requirement for Cisco Aironet 600 Series OfficeExtend APs to connect to a Cisco WLC?

- A. ☐ ☐ ☐ ☐
- B. ☐
- C. TACACS+
- D. LDAP

Answer: C [\(LEAVE A REPLY\)](#)

- ☐
- ☐
- Authentication of users who attempt to log in to the network equipment.
- Authorization to determine what level of access users should have.

https://www.cisco.com/c/en/us/td/docs/switches/lan/Denali_161/ConfigExamples_Technotes/Techzone_Articles
<https://community.cisco.com/t5/wireless-mobility-documents/wlc-and-accs-5-x-tacacs-configuration-example-we>

NEW QUESTION: 142

Which two security features are supported by Cisco FlexConnect groups? (Choose two.)
A. 802.1X authentication
B. WPA2
C. Web authentication
D. WPA3
E. 802.11n
F. 802.11ac

- A. 802.1X authentication
 - B. WPA2
 - C. Web authentication
 - D. WPA3
 - E. 802.11n
 - F. 802.11ac
- Answer: B,C,D (LEAVE A REPLY)

NEW QUESTION: 143

Cisco WLCs support VLAN ID 30. Which command is used to configure the VLAN ID for a FlexConnect group?

- A. config flexconnect BranchA-FCG vlan 30
- B. flexconnect BranchA-FCG vlan add 30
- C. flexconnect BranchA-FCG vlan 30
- D. flexconnect BranchA-FCG VLAN 30

Answer: B (LEAVE A REPLY)

To configure VLAN for a FlexConnect group, use the **config flexconnect group vlan** command.

```
config flexconnect group group_name vlan {add vlan-id acl in-aclname out-aclname | delete vlan-id}
```

NEW QUESTION: 144

Which two features are supported by Cisco Prime Infrastructure? (Choose two.)

- A. 802.1X authentication
- B. WPA2
- C. Web authentication
- D. WPA3

Answer: D (LEAVE A REPLY)

NEW QUESTION: 145

Cisco AireOS supports Cisco Identity-Based Networking. Which two ACLs are supported? (Choose two.)
A. BASE_ACL
B. HR_ACL
C. HR_ACL
D. BASE_ACL

- A. BASE_ACL
- B. HR_ACL
- C. HR_ACL
- D. BASE_ACL

Answer: C (LEAVE A REPLY)

<https://www.cisco.com/c/en/us/support/docs/wireless/4400-series-wireless-lan-controllers/98590-Per-User-ACL-WLC.html#configure-ac>s

NEW QUESTION: 146


C. ☐☐ ☐☐☐ ☐☐☐

D. □□ □□ MAC □□□ □□□

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 151

□ □ □ □ □ □ □ □ □ □ .

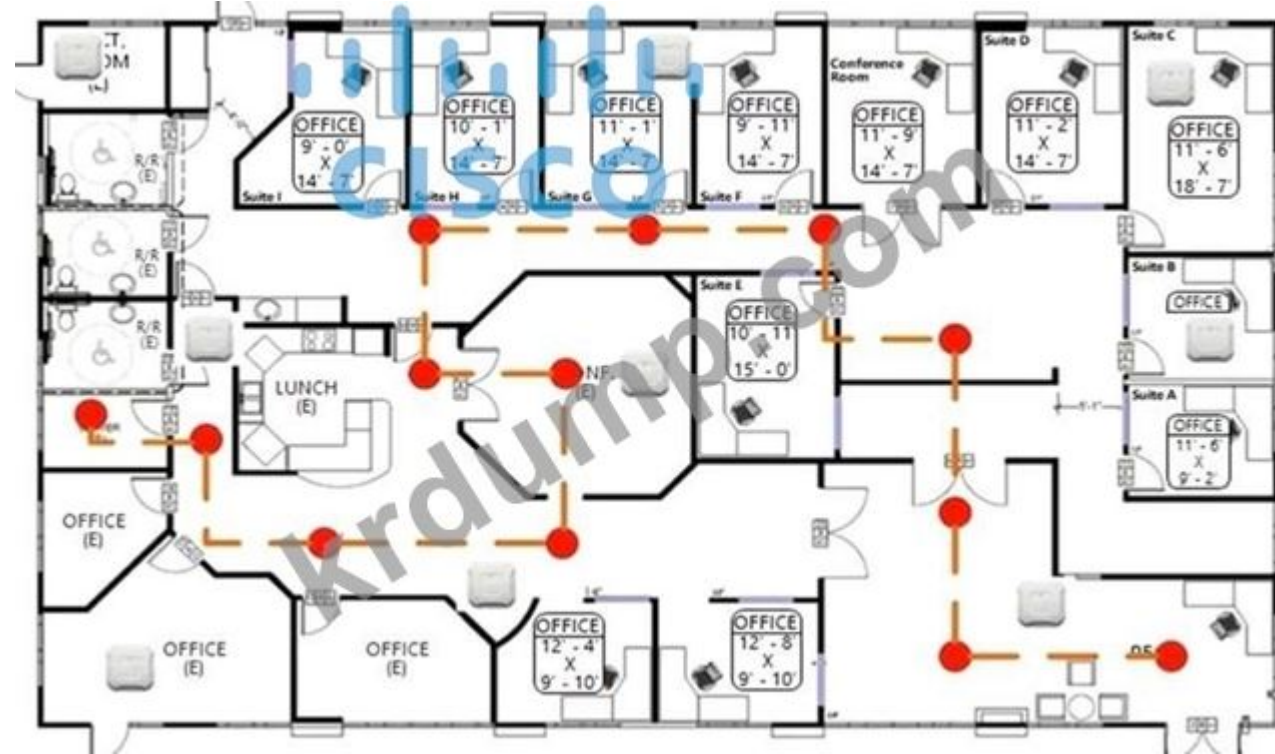

□□□□□□ □□□□□ □□ □□□□ □□□□□ □□□. □□ □□□ FastLocate□ □□□□□ □ □□ □□ □□ □□ □□□□ □□□□□ □□□□□. □□ □□ □□ □□□□ □□□□ □□□□□?

A. ☐☐☐ ☐☐ ☐☐

B. ☐ ☐ ☐ ☐ ☐

C. ☐ ☐ ☐ ☐ ☐

D. □□

Answer: ([SHOW ANSWER](#))

300-430   DumpTop   300-430 ! DumpTop   **300-430**   , DumpTop 300-430     <

NEW QUESTION: 152

0000 00 000000 00 00 000 0000 000000 0 00 000 0000 00 000000 000000. 0 000 0000 00 000000 000 0000 Cisco FlexConnect AP 00 0000
 0 0000 000 0000 000. 0000 000000 00 000 000000 000?

A. IGMP □□□□

B. ☐☐☐☐☐ ☐☐☐☐

C. $\square\square\square\square\square + \square\square\square\square\square\square\square$

D. ☐☐☐☐☐ ☐☐☐☐

Answer: D (LEAVE A REPLY)

NEW QUESTION: 153

[illegible]

- A.** ☐☐☐☐☐ ☐☐ ☐☐
- B.** ☐☐
- C.** TACACS+
- D.** LDAP

Answer: C (LEAVE A REPLY)

- Authentication of users who attempt to log in to the network equipment.
- Authorization to determine what level of access users should have.

https://www.cisco.com/c/en/us/td/docs/switches/lan/Denali_161/ConfigExamples_Technotes/Techzone_Articles/Example_and_Technotes_Denali_16_1_1/Example_and_Technotes_Denali_16_1_1_chapter_010110.pdf

NEW QUESTION: 154

BYOD □□□ □□ □□□ □□□□ □□□ □□□□□?

- A.** ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ MDM ☐ ☐ ☐ ☐
- B.** ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ BYOD ☐ ☐ ☐ ☐
- C.** ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
- D.** MDM ☐ ☐ ☐ ☐ ☐ ☐ ☐ LAN ☐ ☐ ☐ ☐

Answer: D (LEAVE A REPLY)

NEW QUESTION: 155

□□□□□ □□ □□ □□□ □□ BYDD □□□ □□□□ □□□.

- * □ □ □ □ □ □ □
- * □ □ □ □ □
- * □ ?

- A.** □□□ SSID
B. SSID □□
C. □□ SSID
D. □□ SSID

Answer: D (LEAVE A REPLY)

11

https://www.cisco.com/c/en/us/td/docs/solutions/Enterprise/Borderless_Networks/Unified_Access/BYOD_Design

NEW QUESTION: 156

00 000 00 00 AP0 0000 000 000 00 0000 0000. 00 0000 00000 Cisco Prime Infrastructure00 000 000 00 00000 00000 00 000 0000 000?

- A.** ☐ ☐ ☐ ☐ ☐ 4 ☐ ☐ ☐ ☐ Ad Hoc Rogue AP ☐ ☐ ☐ ☐ ☐ ☐.
- B.** ☐ ☐ ☐ ☐ 0 ☐ ☐ ☐ ☐ Ad Hoc Rogue AP ☐ ☐ ☐ ☐ ☐ ☐.
- C.** ☐ ☐ ☐ ☐ 4 ☐ ☐ ☐ ☐ Using Our SSID ☐ ☐ ☐ ☐ ☐ ☐.

NEW QUESTION: 160

Which two statements are true about EIGRP and BGP? (Choose two.)

- A. EIGRP is a link-state protocol.
- B. BGP is a distance-vector protocol.
- C. EIGRP is a link-state protocol.
- D. BGP is a distance-vector protocol.

Answer: (SHOW ANSWER)

PIM in Source Specific Multicast (PIM-SSM) is similar to PIM-SM with the additional ability to report interest in receiving packets from specific source addresses (or from all but the specific source addresses) to an IP multicast address.

<https://mrncciew.com/2012/12/28/multicast-deployment-types/>

NEW QUESTION: 161

Which two statements are true about Cisco Prime Infrastructure? (Choose two.)

- A. Cisco Wireless LAN Controller is a component of Cisco Prime Infrastructure.
- B. Cisco Prime Infrastructure is a network management tool.
- C. Cisco Wireless LAN Controller is a component of Cisco Prime Infrastructure.
- D. Cisco Prime Infrastructure is a network management tool.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 162

Which two statements are true about Cisco OEAP? (Choose two.)

- A. config flexconnect office-extend nat-ip-only is the correct command.
- B. config network ap-discovery nap-ip-only enable is the correct command.
- C. config flexconnect office-extend nat-ip-only enable is the correct command.
- D. config network ap-discovery nat-ip-only is the correct command.

Answer: D (LEAVE A REPLY)

<https://community.cisco.com/t5/wireless/office-extend-ap-and-external-addresses/td-p/3742395>

NEW QUESTION: 163

Which two statements are true about QoS? (Choose two.)

- A. WLAN is a QoS policy.
- B. WMM is a QoS policy.
- C. mls qos trust dscp is the correct command.
- D. mls qos trust cos is the correct command.

Answer: (SHOW ANSWER)

In trusting the AP DSCP values, the access switch is simply trusting the policy set for that AP by the WLC. The maximum DSCP value assigned to client traffic is based on the QoS policy applied to the WLANs on that AP.

NEW QUESTION: 164

IT 0000 00 00 00 20 000 00 000 000 000 00 0000 0000 0000. Cisco Prime00 0 00000 000 0 00 0 00 000 00000? (0 000 00000.)

- A.** CSV
B. PDF
C. XLS
D. DOC
E. ☐☐ ☐☐☐

Answer: A,B (LEAVE A REPLY)

□□/□□: https://www.cisco.com/c/en/us/td/docs/net_mgmt/prime/infrastructure/3-2/user/guide/bk_CiscoPrimeInfrastructure_3_2_0_UserGuide/bk_CiscoPrimeInfrastructure_3_2_0_UserGuide_chapter_01010.html

NEW QUESTION: 165

□□□□□ □□ MSE□ □□□□ □□□□. □□□□□□ 3000□□ AP□ □□ 7000□□ IPS □□□□□ □□□□□. □□□□□ □□□ □□ □□□ □□□□□?

- A. ☐☐☐☐
B. ☐☐
C. ☐☐☐☐
D. ☐☐

Answer: A (LEAVE A REPLY)

NEW QUESTION: 166

□ □ □ □ □ □ □ □ □ □ □ □ .

```
*radiusTransportThread: May 20 13:04:02.658: AuthorizationResponse: 0x1489ad70
*radiusTransportThread: May 20 13:04:02.658: structureSize.....577
*radiusTransportThread: May 20 13:04:02.658: resultCode.....0
*radiusTransportThread: May 20 13:04:02.658: protocolUsed.....0x00000001
*radiusTransportThread: May 20 13:04:02.658: proxyState..... 00:0b:0a:0c:0d:0e-02:06
*radiusTransportThread: May 20 13:04:02.658: Packet contains 9 AVPs:
*radiusTransportThread: May 20 13:04:02.658: AVP[01] User-Name.....User1 (11 bytes)
*radiusTransportThread: May 20 13:04:02.658: AVP[02]
State.....ReauthSession:c0a80a06000000003573f5190 (38 bytes)
*radiusTransportThread: May 20 13:04:02.658: AVP[03]
Class.....CACSC:c0a80a06000000003573f5190:ISE01/253088040/17 (50 bytes)
*radiusTransportThread: May 20 13:04:02.658: AVP[04] EAP-
Message.....0x038a0004 (59375620) (4 bytes)
*radiusTransportThread: May 20 13:04:02.658: AVP[05] Message-
Authenticator.....DATA (16 bytes)
*radiusTransportThread: May 20 13:04:02.658: AVP[06] Cisco / Url-
Redirect.....DATA (133 bytes)
*radiusTransportThread: May 20 13:04:02.658: AVP[07] Cisco / Url-Redirect-
Acl.....BLACKHOLE (9 bytes)
*radiusTransportThread: May 20 13:04:02.658: AVP[08] Microsoft / MPPE-Send-
Key.....DATA (32 bytes)
*radiusTransportThread: May 20 13:04:02.658: AVP[09] Microsoft / MPPE-Recv-
Key.....DATA (32 bytes)
*Dot1x_NW_MsgTask_2: May 20 13:04:02.658: 00:0b:0a:0c:0d:0e Applying new AAA override for
station 00:0b:0a:0c:0d:0e
*Dot1x_NW_MsgTask_2: May 20 13:04:02.658: 00:0b:0a:0c:0d:0e Override values for station
94:bl:0a:c2:3a:4a
    source: 4, valid bits: 0x0
    qosLevel: -1, dscp: 0xffffffff, dot1pTag: 0xffffffff, sessionTimeout: -1
*Dot1x_NW_MsgTask_2: May 20 13:04:02.658: 00:0b:0a:0c:0d:0e Override values (cont..)
dataAvgC: -1, rTavgC: -1, dataBurstC: -1, rTimeBurstC: -1
    vlanIfName: '', vlanId:0, aclName: ', ipv6AclName: ', avcProfileName: '
```

□□□□□□ □□□□□□ □□ □□□ □□□□□ □□□□□. □□□□□□□ RUN □□□□ Cisco ISE□ □□□□ □□□ □ □□□□ □□□□ □□□□□. □□ □□□ □□□ □□□□□□?

- A.** ☐☐☐☐ ☐☐☐☐ ☐☐ ☐ ACL ☐☐☐☐☐.


```
(Cisco Controller) >
(Cisco Controller) >*EAP Framework: Jan 21 23:55:43.569: eap_fast.c-EVENT: New context (EAP handle = c4000000)
*EAP Framework: Jan 21 23:55:43.569: eap_fast.c-EVENT: Allocated new EAP-FAST context (handle = 37000000)
*EAP Framework: Jan 21 23:55:43.569: eap_fast_auth.c-AUTH-EVENT: Process Response (EAP handle = c4000000)
*EAP Framework: Jan 21 23:55:43.569: eap_fast_auth.c-AUTH-EVENT: Received Identity
*EAP Framework: Jan 21 23:55:43.569: eap_fast_tlv.c-AUTH-EVENT: Adding PAC A-ID TLV (436973636f000000000000000000000000)
*EAP Framework: Jan 21 23:55:43.569: eap_fast_auth.c-AUTH-EVENT: Sending Start
*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-AUTH-EVENT: Process Response, type: 0x2b
*EAP Framework: Jan 21 23:55:43.586: eap_fast_auth.c-AUTH-EVENT: Process Response (EAP handle = c4000000)
*EAP Framework: Jan 21 23:55:43.586: eap_fast_auth.c-AUTH-EVENT: Received TLS record type: Handshake in state: Start
*EAP Framework: Jan 21 23:55:43.586: eap_fast_auth.c-AUTH-EVENT: Reading Client Hello handshake
*EAP Framework: Jan 21 23:55:43.586: eap_fast_auth.c-AUTH-EVENT: Ignoring unknown ext rec type: 10
*EAP Framework: Jan 21 23:55:43.586: eap_fast_auth.c-AUTH-EVENT: Ignoring unknown ext rec type: 11
*EAP Framework: Jan 21 23:55:43.586: eap_fast_auth.c-AUTH-EVENT: TLS_DHE_RSA_WITH_AES_128_CBC_SHA proposed...
*EAP Framework: Jan 21 23:55:43.586: eap_fast_auth.c-AUTH-EVENT: TLS_RSA_WITH_AES_128 proposed...
*EAP Framework: Jan 21 23:55:43.586: eap_fast_auth.c-AUTH-EVENT: TLS_RSA_WITH_RC4_128 proposed...
*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-EVENT: Proposed ciphersuite(s):
*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-EVENT: Unknown ciphersuite 255
*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-EVENT: Unknown ciphersuite 49188

*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-EVENT: Unknown ciphersuite 103
*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-EVENT: Unknown ciphersuite 57
*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-EVENT: TLS_DHE_RSA_WITH_AES_128_CBC_SHA
*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-EVENT: Unknown ciphersuite 22
*EAP Framework: Jan 21 23:55:43.586: eap_fast.c-EVENT: Unknown ciphersuite 61

*EAP Framework: Jan 21 23:55:43.587: eap_fast.c-EVENT: TLS_RSA_WITH_AES_128_CBC_SHA
*EAP Framework: Jan 21 23:55:43.587: eap_fast.c-EVENT: Unknown ciphersuite 10
*EAP Framework: Jan 21 23:55:43.587: eap_fast.c-EVENT: Unknown ciphersuite 49159
*EAP Framework: Jan 21 23:55:43.587: eap_fast.c-EVENT: Unknown ciphersuite 49169
*EAP Framework: Jan 21 23:55:43.587: eap_fast.c-EVENT: TLS_RSA_WITH_RC4_128_SHA
*EAP Framework: Jan 21 23:55:43.587: eap_fast.c-EVENT: Unknown ciphersuite 4
*EAP Framework: Jan 21 23:55:43.592: eap_fast.c-AUTH-EVENT: eap_fast_rx_packet(): EAP Fast NoData (0x2b)
*EAP Framework: Jan 21 23:55:43.592: eap_fast.c-AUTH-EVENT: Process Response, type: 0x2b
*EAP Framework: Jan 21 23:55:43.592: eap_fast_auth.c-AUTH-EVENT: Process Response (EAP handle = c4000000)
*EAP Framework: Jan 21 23:55:43.592: eap_fast_auth.c-AUTH-EVENT: Received ACK from peer
*EAP Framework: Jan 21 23:55:43.592: eap_fast.c-EVENT: Free context (EAP handle = c4000000)
```

Which of the following is a Cisco WLC feature? EAP-PEAP is a Cisco WLC feature. EAP-FAST is a Cisco WLC feature. EAP-TLS is a Cisco WLC feature. EAP-TTC is a Cisco WLC feature.

- A. Cisco WLC is a Cisco WLC feature.
- B. EAP-PEAP is a Cisco WLC feature.
- C. EAP-FAST is a Cisco WLC feature.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 170

Which of the following is a Cisco WLC feature? EAP-PEAP is a Cisco WLC feature. EAP-FAST is a Cisco WLC feature. EAP-TLS is a Cisco WLC feature. EAP-TTC is a Cisco WLC feature.

- A. PAC is a Cisco WLC feature.
- B. EAP-PEAP is a Cisco WLC feature.
- C. EAP-FAST is a Cisco WLC feature.
- D. EAP-TLS is a Cisco WLC feature.
- E. RADIUS IP is a Cisco WLC feature.

Answer: C,E ([LEAVE A REPLY](#))

NEW QUESTION: 171

Which of the following is a Cisco WLC feature? EAP-PEAP is a Cisco WLC feature. EAP-FAST is a Cisco WLC feature. EAP-TLS is a Cisco WLC feature. EAP-TTC is a Cisco WLC feature.

- A. PAC is a Cisco WLC feature.
- B. EAP-PEAP is a Cisco WLC feature.
- C. EAP-FAST is a Cisco WLC feature.
- D. EAP-TLS is a Cisco WLC feature.

Answer: D (LEAVE A REPLY)

• PRESENCE ANALYTICS: Cisco Presence Analytics service is a new analytics engine that detects the presence of visitors via their mobile devices interactions with even a single network access point. The probe requests which are transmitted from the wireless devices provide information, which is used to identify the general

NEW QUESTION: 172

Which of the following is a feature of Cisco Prime Infrastructure?
 A. Cisco Prime Infrastructure can monitor the health of the network.
 B. Cisco Prime Infrastructure can monitor the health of the network.
 C. Cisco Prime Infrastructure can monitor the health of the network.
 D. Cisco Prime Infrastructure can monitor the health of the network.

- A. Cisco Prime Infrastructure can monitor the health of the network.
- B. Cisco Prime Infrastructure can monitor the health of the network.
- C. Cisco Prime Infrastructure can monitor the health of the network.
- D. Cisco Prime Infrastructure can monitor the health of the network.

Answer: A (LEAVE A REPLY)

Which of the following is a feature of Cisco Prime Infrastructure?



<https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/Apr2014/CVD-CampusCleanAirDesignGuide-APR1>

NEW QUESTION: 173

Which of the following is a feature of Cisco Prime Infrastructure?
 A. Cisco Prime Infrastructure can monitor the health of the network.
 B. Cisco Prime Infrastructure can monitor the health of the network.
 C. Cisco Prime Infrastructure can monitor the health of the network.
 D. Cisco Prime Infrastructure can monitor the health of the network.

- A. Cisco Prime Infrastructure can monitor the health of the network.
- B. Cisco Prime Infrastructure can monitor the health of the network.
- C. Cisco Prime Infrastructure can monitor the health of the network.
- D. Cisco Prime Infrastructure can monitor the health of the network.

Answer: (SHOW ANSWER)

Which of the following is a feature of Cisco Prime Infrastructure?

Which of the following is a feature of Cisco Prime Infrastructure?
 A. Cisco Prime Infrastructure can monitor the health of the network.
 B. Cisco Prime Infrastructure can monitor the health of the network.
 C. Cisco Prime Infrastructure can monitor the health of the network.
 D. Cisco Prime Infrastructure can monitor the health of the network.

NEW QUESTION: 174

Which of the following is a feature of Cisco Prime Infrastructure?

- A. Cisco Prime Infrastructure can monitor the health of the network.
- B. Cisco Prime Infrastructure can monitor the health of the network.
- C. Cisco Prime Infrastructure can monitor the health of the network.
- D. Cisco Prime Infrastructure can monitor the health of the network.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 175

Router A is connected to Router B. Router A has a GigabitEthernet interface configured with a speed of 1000 Mbps. Router B has a GigabitEthernet interface configured with a speed of 24Mbps. The link between the two routers is configured with a speed of 1000 Mbps. What is the maximum bandwidth of the link between the two routers? (3 correct answers.)

- A. The link bandwidth is determined by the slowest interface in the path. In this case, the link bandwidth is 24Mbps.
- B. The link bandwidth is determined by the fastest interface in the path. In this case, the link bandwidth is 1000Mbps.
- C. The link bandwidth is determined by the sum of the bandwidths of all interfaces in the path. In this case, the link bandwidth is 1000Mbps + 24Mbps = 1024Mbps.
- D. The link bandwidth is determined by the number of interfaces in the path. In this case, the link bandwidth is 1000Mbps.
- E. IPv4 Multicast Listener Discovery (MLD) v1 is not supported on the link between the two routers.
- F. L3 VLAN interface configuration is not supported on the link between the two routers.

Answer: C,D,F ([LEAVE A REPLY](#))

NEW QUESTION: 176

Router A is connected to Router B. Router A has a GigabitEthernet interface configured with a speed of 1000 Mbps. Router B has a GigabitEthernet interface configured with a speed of 1000 Mbps. The link between the two routers is configured with a speed of 1000 Mbps. What is the maximum bandwidth of the link between the two routers? (3 correct answers.)

- A. The link bandwidth is determined by the slowest interface in the path. In this case, the link bandwidth is 1000Mbps.
- B. Cisco ISE is not supported on the link between the two routers.
- C. The link bandwidth is determined by the sum of the bandwidths of all interfaces in the path. In this case, the link bandwidth is 1000Mbps + 1000Mbps = 2000Mbps.
- D. The link bandwidth is determined by the number of interfaces in the path. In this case, the link bandwidth is 1000Mbps.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 177

Router A is connected to Router B. Router A has a GigabitEthernet interface configured with a speed of 1000 Mbps. Router B has a GigabitEthernet interface configured with a speed of 1000 Mbps. The link between the two routers is configured with a speed of 1000 Mbps. What is the maximum bandwidth of the link between the two routers? (3 correct answers.)

- A. The link bandwidth is determined by the slowest interface in the path. In this case, the link bandwidth is 1000Mbps.
- B. The link bandwidth is determined by the sum of the bandwidths of all interfaces in the path. In this case, the link bandwidth is 1000Mbps + 1000Mbps = 2000Mbps.
- C. The link bandwidth is determined by the number of interfaces in the path. In this case, the link bandwidth is 1000Mbps.
- D. The link bandwidth is determined by the fastest interface in the path. In this case, the link bandwidth is 1000Mbps.

Answer: ([SHOW ANSWER](#))

Router A is connected to Router B. Router A has a GigabitEthernet interface configured with a speed of 1000 Mbps. Router B has a GigabitEthernet interface configured with a speed of 1000 Mbps. The link between the two routers is configured with a speed of 1000 Mbps. What is the maximum bandwidth of the link between the two routers? (3 correct answers.)

<https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/81671-multicast-wlc-lap.html>

NEW QUESTION: 178

10.6.1 Router A is connected to Router B. Router A has a GigabitEthernet interface configured with a speed of 1000 Mbps. Router B has a GigabitEthernet interface configured with a speed of 1000 Mbps. The link between the two routers is configured with a speed of 1000 Mbps. What is the maximum bandwidth of the link between the two routers? (3 correct answers.)

- A. The link bandwidth is determined by the slowest interface in the path. In this case, the link bandwidth is 1000Mbps.
- B. The link bandwidth is determined by the sum of the bandwidths of all interfaces in the path. In this case, the link bandwidth is 1000Mbps + 1000Mbps = 2000Mbps.
- C. cmxha config disable is not supported on the link between the two routers.
- D. The link bandwidth is determined by the number of interfaces in the path. In this case, the link bandwidth is 1000Mbps.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 179

□□□□□ □□ □□□ □□ □□□ □□□ EIGRP □ BGPP □□□□ □□□□□□ □□ □□ □□ □□ □□ □□□□□ □□□□ □□□□. □□ □□□ □□□□□ □□□□ □□□□ □□□□?

- A. □□□□ □□□ □□□□□ □□ □□
- B. □□ □□ □□□□□
- C. □□□□□ □□ □□ □□□□
- D. □□□□ □□□ □□□□□ □□□ □□

Answer: B (LEAVE A REPLY)

□□

PIM in Source Specific Multicast (PIM-SSM) is similar to PIM-SM with the additional ability to report interest in receiving packets from specific source addresses (or from all but the specific source addresses) to an IP multicast address.

https://mrncciew.com/2012/12/28/multicast-deployment-types/

NEW QUESTION: 180

mDNS □□□ □□□□ □□ □ □□ □□ □□□ □□□□? (□ □□□ □□□□□.)

- A. mDNS□ UDP □□ 5353□ □□ □□□ □□□ □ □□□□.
- B. mDNS□ IPv6□□ □□□□ □□□□.
- C. mDNS□ UDP □□ 5436□ □□ □□□ □□□□□.
- D. mDNS□ □□□ □□□ WLAN□ □□ FlexConnect AP□□ □□□□ □□□□.
- E. □□□□ □□□□□□ 7. 0. 6+□□ □□ □□□□□ □□□.

Answer: B,D (LEAVE A REPLY)

Restrictions for Configuring Multicast DNS

- mDNS over IPv6 is not supported.
- mDNS snooping is not supported on access points in FlexConnect mode in a locally switched WLAN and mesh access points. multicast traffic including mDNS is simply bridged between the local VLAN and the SSID.
- mDNS is not supported on remote LANs.



NEW QUESTION: 181

Cisco CMX□ □□□□ □□□ □ □□□□ Cisco CMX □□□□ NTP □□□ □□□□ □□□. □ □□□ □□□□ □□□ □□□□□?

- A. service ntpd restart□ □□□□ ntpd□ □□ □□□□ □□ □□ □□□□ /etc/ntp.conf□ □□□□ □□□□□.
- B. Cisco CMX CLI□ □□□□□ set ntp server NTP_IP□ □□□□□. □□□ NTPJP□ NTP □□□ IP□□□□.
- C. service restart all services□ □□□□ □□□ □□ □□□□ □□ XML □□□□ □□□□ /etc/ntp.conf□ □□□□ □□□□□.
- D. Cisco CMX GUI□ □□□□ □□□□□ □□□ □ > □□ > TimeZone/NTP□ NTP □□□ IP □□□ □□□□□.

Answer: A (LEAVE A REPLY)

https://www.cisco.com/c/en/us/support/docs/wireless/connected-mobile-experiences/200906-Troubleshooting-CMX-connectivity-with-WL.pdf

300-430    DumpTop           

300-430              