

HP.HPE6-A73.v2022-06-30.q75

□□□□:	HPE6-A73
□□□□:	Aruba Certified Switching Professional Exam
□□□:	HP
□□ □□ □□□:	75
□□:	v2022-06-30
# □□ □:	1305
# □□ □□□:	750
https://www.krdump.com/HP.HPE6-A73.v2022-06-30.q75.html	

NEW QUESTION: 1

AOS-CX □□□□ □□ □□ □ □□ □□□ □□□□ □□ □□ □□□□□?

- A. □□ □□ □ □□ □□□ □□□□ □□□ □ □□□□.
- B. □□□□□□ □ □□□□□ □□□□ □□□□ □□□ □□ □ □□□□.
- C. □□□□ □□ □□□ □□ □ □□□ □□□ □□□ □ □□□□.
- D. □□ □□ □ □□□□ □□□ □□□ □□□□ □□□□ □□□ □ □□□□.

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 2

□□□□ □□□□□ □□□□□□ NAE □□□□ □□□□ □□□ □□□□ □□□ □□□ □□ □□□ □□□□ □□□□ □ □□ □□□. □□□□□ AOS-CX □□□□ NTP□□□□ □□□□□ □□□□□□ □□□□□□. □ □□□ □□ □□□ □□□ □□ □□□?

- A. □□□□□ PC□ AOS-CX □□□□ □□□ NTP □□□ □□□□□□□ □□□□□.
- B. □□□□□ □ □□□□□ AOS-CX □□□□ □□□ □□□□ □□ □□□□ □□□ □□□□□.
- C. NetEdit □ AOS-CX □□□□ □□□ NTP □□□ □□□□□□□ □□□□□.
- D. AOS-CX □□□□ SSL □□□□ □□ □□ □□ □□□

Answer: [C \(LEAVE A REPLY\)](#)

NEW QUESTION: 3

AOS-CX □□□□□ VLAN□ □□ VLAN□□ □□□□ □□□ □□□□ □□□□ □□□ □□□□□?

- A. Switch(config)# vlan <VLAN-ID> □□
- B. □□□(config)# □□ □□□ lldp-group <LLDP-□□ □□>
□□□(config-lldp-group)# vlan <VLAN-ID>
- C. Switch(config)# □□ □□ □□ <role-name>
□□□(config-pa-role)# VLAN □□□ <VLAN-ID>
- D. □□□(□□)# vlan <VLAN-ID>
□□□(config-vlan-<VLAN-ID>)# □□

Answer: D (LEAVE A REPLY)

NEW QUESTION: 4

□□ AOS-CX □□□ □□□ □□□□□□.

```
Access(config)# access-list ip ext
Access(config-acl-ip)# permit ip any 10.0.11.0/255.0.255.0 count
Access(config-acl-ip)# permit ip any 10.0.12.0/255.0.255.0 log
Access(config-acl-ip)# exit
Access(config)# interface 1/1/3
Access(config-if)# apply access-list ip ext in
Access(config-if)# exit
```

□□ □ □□□□□ 1/1/3□ □□□□ □□□□ □□ □□□□ □□□ □□ □□ □□□□□□?

- A. 10.1.11.0/24□ IP □□□□ 10.1.110.0/24□ □□□□□□ □□□□□.
- B. 10.0.11.0/24□□ □□ IP □□□□ 10.1.12.0/24□ □□□□ □ □□□□.
- C. 10.1.12.0/24□ IP □□□□ 172.0.1.0/23□ □□□□□□ □□□□□.
- D. 10.0.12.0/24□□ □□ □□□□ 10.0.11.0/24□ □□□□ □ □□ □□□□ □□□□□.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 5

PIM □□ □□(SM)□ □□□ □□□ □□□□□□?

- A. □□□ □□□ □□□□□□ □□□□□ □□□□.
- B. □□□□□ □□□□ □□□□ □□□□ □□ □□ □□□□ □□□□□.
- C. □□□□ □□□ □□□ □ □□□□ □□ □□□□.
- D. □□ □□ □□(SPT)□ □□□□ □□ □□□□ □□□ □□□□□.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 6

□□□ AOS-CX □□□ □□□□ 802.1X □□□ □□□□□, □□□ 2□□ ClearPass □□□ AAA□ □□□□ □ □□□□□.

□ □□□□□ □ □□ □□□ □□□□ □□□□. □□□□ □□□□□ AOS-CX □□□□ □□□ □□ □□□ □□□□□.

□□ □□ □□ □□□ □□ □□□ □□ □□ □□□ aruba123

□ □□□ □□□ □□□□□□?

- A. AAA □□□□ □□ □□ □□ □□
- B. □□□□ □□□ □□□ □□□ □□□□ □□ □□ □□
- C. AAA □□ □□□□ □□ □□
- D. □□ □□□ □□□□ □□ □□ □□

Answer: (SHOW ANSWER)

□□

https://techhub.hpe.com/eginfolib/networking/docs/switches/K-KA-KB/16-01/5200-0122_access_security_guide/content/ch09s02.html

NEW QUESTION: 7

□□□ □□□ □□ □□ □□□, □□□ □ □□□ □□□□ □□□□□. □□□ 802.1X□ □□□□ □□□□ □□ □□□□ □ □□□ □□□□ □□□□□. □□□□ □□□ □□ □□□□ AOS-CX □□□ □□□ □□ □□□ □□□□ □□□□ □□□□?

- A. 802.1X, □□ □□ □ MAC-Auth
- B. 802.1X □ MAC-Auth □□
- C. 802.1X□ □□
- D. 802.1X □ □□ □□ □□

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 8

□□□□ □□□□□ NetEdit□ □□□□ AOS-CX □□□□ □□□□ □□□□. □□□□□ □□ □□ VoIP □□□□ NetEdit □ □□□□ □□□□ □□□ □□□□□. □□□□□ □□ □□□□□ NetEdit□□ □□□□ □□□□□ □□□□ □ □□□ □□ □□□ □□□ □□ □□□□?□ □□ □□□□□.

- A. □□ VoIP □□□□□ SSH □□□□□ □□□□□□□□.
- B. □□ VoIP □□□□□ RESTful API □□□□□
- C. VoIP □□ SNMP □□□□□ □□□□□ NetEdit□□ □ □ □□ □□□□□ □□□□□.
- D. □□□□□ □□□ AOS-CX □□□□□□ □□□□□□□ LLDPO □□□□□□□□□.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 9

AOS-CX □□□□□ js □□ □□□□ □□ □□□ □□□□ □□□□ □□□ □□□□□□?

- A. tt□ □□□ □□ □□ □□□□ □□
- B. □□ VLAN □□
- C. WFQ(Weighted Fair Queueing) □□
- D. QOS □□□□ □□ □□□□ □□□□

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 10

□□□□□□ AOS-CX □□□□□ □□ □□□□□ □□ □□ □□?

- A. IGMP □□ □□□ □□□□□□ Layer-2 VLAN □□□□□□□□ □□□□□□□.
- B. IGMP □□□□ □□□□□□ Layer-2 VLAN □□□□□□□□ □□□□□□□ □□□□□.
- C. IGMP □□□□ □□□□□□ Layer-3 VLAN □□□□□□□□ □□□□□□□.
- D. IGMP □□ AOS-CX □□□□□ □ □ □□ □□□□□□ □□□ □□□□□□□.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 11

□□□□ □□□□ □□□□□□□.


```

switch# show capacities-status nae
System Capacities Status: Filter NAE

Capacity Status Name          Value    Maximum
-----
Number of configured NAE agents currently active in the system      1        100
Number of configured NAE monitors currently active in the system     7        500
Number of configured NAE scripts currently active in the system      50        50

switch# show ntp status
NTP Status Information

NTP : Disabled
NTP Authentication : Disabled
NTP Server Connections : Using the default VRF

System time : Sat May 2 11 50 55 UTC 2020
NTP uptime : 0 minutes, 0 seconds
Not synchronized with an NTP server

switch# show crypto pki certificate
Certificate Name      Cert Status      Associated Applications
-----
local-cert           installed        captive-portal, hsc, https-server,
syslog-client

switch# show crypto pki application
Associated Applications  Certificate Name  Cert Status
-----
captive-portal         local-cert       not configured, using local-cert
hsc                    local-cert       not configured, using local-cert
https-server           local-cert       not configured, using local-cert
syslog-client          local-cert       not configured, using local-cert

```

Which of the following is true?

- A. The system is not synchronized with an NTP server.
- B. The system is not synchronized with an NTP server.
- C. The system is not synchronized with an NTP server.
- D. The system is not synchronized with an NTP server.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 13

Which of the following is true?

```

switch# show capacities-status nae
System Capacities Status: Filter NAE

Capacity Status Name          Value    Maximum
-----
Number of configured NAE agents currently active in the system      1        100
Number of configured NAE monitors currently active in the system     7        500
Number of configured NAE scripts currently active in the system      50        50

switch# show ntp status
NTP Status Information

NTP : Disabled
NTP Authentication : Disabled
NTP Server Connections : Using the default VRF

System time : Sat May 2 11 50 55 UTC 2020
NTP uptime : 0 minutes, 0 seconds
Not synchronized with an NTP server

switch# show crypto pki certificate
Certificate Name      Cert Status      Associated Applications
-----
local-cert           installed        captive-portal, hsc, https-server,
syslog-client

switch# show crypto pki application
Associated Applications  Certificate Name  Cert Status
-----
captive-portal         local-cert       not configured, using local-cert
hsc                    local-cert       not configured, using local-cert
https-server           local-cert       not configured, using local-cert
syslog-client          local-cert       not configured, using local-cert

```

Which of the following is true?

- A. The system is not synchronized with an NTP server.
- B. The system is not synchronized with an NTP server.

NEW QUESTION: 17

□□□□ □□□ □□□ □□□ □□ □□ □□□□ □□□□ AOS-CX □□□□ □□□ □□□□□.

Switch# show port-access role clearpass

Role Information:

Name : icxarubadur_employee-3044-2

Type : clearpass

Status: failed, parsing_failed



Reauthentication Period :
Authentication Mode :
Session Timeout :

□□□□ □□□ □□□ □□□ AOS-CX □□□□ □□□□□□ □□□□. □□ □□□ □□□ □□□ □□□□□?

- A. ClearPass □ □□□□ □□□□ □□□□ □□□□.
- B. DNS □ ClearPass □□ FQDN □ □□□□ □□□□.
- C. ClearPass □□□ □□□ □□□ □□/□□ □□□ □□□□.
- D. AOS-CX □□□□□ ClearPass □□□□ □□□□ □□ □□□□.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 18

AOS-CX □□□□□ NAE □□□□□ □□□□ □□ □□□□ □□□□ □□□ □□□□ □□□?

- A. □□□□
- B. □□
- C. □□
- D. □□

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 19

AOS-CX □□□ □□□ □□□□□.

```
Switch# show aaa authentication port-access interface 1/1/1 client-status
```

Port Access Client Status Details

```
Client 00:50:56:b1:7a:37, icx-employee
```

Session Details

```
Port      : 1/1/3  
Session Time : 31273s
```

Authentication Details

```
Status      : dot1x Authenticated  
Auth Precedence : dot1x - Authenticated, mac-auth - Not attempted
```

Authorization Details

```
Role      : aruba_contractor-3044-7  
Status    : Applied
```



□ □□□ □□□□ □□ □□?

- A. 802.1X □□□ □□□□□ MAC □□□ □□ □□□□ □□□□□.
- B. □□□ 802 1X □□□ □□□□ □□□□.
- C. 802 1X □□□ □□□□□ □□□□ □□□ □□□ □□□□□□□□.
- D. ClearPass □□□□ □□□□ □□ □□□ □□□ □□□□□□□□.

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 20

□□□□ □□ □□ □□□ □□□□□ □□□. □□□□□ AOS-CX □ Aruba □□□□□□ □□□□□□.
□□□□ □□ □□□ □□ □□□□□ □□□ □□□ □□□□□ □□□ □□□□ □□ □□ □□□ □□□ □□□□ □□□?

- A. □□□ □□ □□□(UBT)
- B. □□□ □ □□□(SST)
- C. □□ □□ □□□(PBT)
- D. □□ □□□

Answer: A [\(LEAVE A REPLY\)](#)

NEW QUESTION: 21

□□□□ "count" □ "log" □□□ □□ □□□□□ ACL □□□ □□□□□. □ □□□ □□□□ □□□ □□ □ AOS-CX □□□□
□□□ □□□ □□ □□ □□□□□?

- A. u\log" □□□□ □□ □ □□□ □□ □□ □□ □□□□ □□□□.
- B. □□□□ □□□ □ TLS □□□□ □□□□ □□□ □□□□

- C. `count log` AOS-CX ASIC.
- D. "count" log AOS-CX ASIC.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 22

AOS-CX configuration:

```

object-group ip address web-servers
 10.1.12.2
 10.1.12.3
exit
object-group port web-ports
 eq 80
 eq 443

```

ACL configuration:

- A. `ip 10 tcp`
- B. `ip 10 tcp`
- C. `ip 10 tcp`
- D. `ip 10 tcp`

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 23

AOS-CX 6300 configuration:

- A. VSF
- B. VSF VSX
- C. VSF
- D. VSX

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 24

VLAN configuration:

- A. VLAN 6(10.1.6.0/24) VLAN 5(10.1.5.0/24)
- B. VLAN 6(10.1.6.0/24) VLAN 5(10.1.5.0/24)
- C. VLAN 6(10.1.6.0/24) VLAN 5(10.1.5.0/24)
- D. VLAN 6(10.1.6.0/24) VLAN 5(10.1.5.0/24)

NEW QUESTION: 28

□ □□□□ □□□ □□ □□□ □□□□ □□□ □□□ □□□ □□□□□ □□□ □□□□□ □□□□ □□ □□ □□□ □□
□. □□□□□ POE□ □□□ Aruba MC(□□□□ □□□□) □ Aruba AP □□□ □□□□□. □□□ □□□ □□□ □□□□
□□□□ □□ □□□ AOS-CX □□□ □□□ □ □□ □□□□ □□□□□?

- A. AOS-CX 8400 □ VSX
- B. AOS-CX 6300 □ VSF
- C. AOS-CX 8325 □ VSF
- D. AOS-CX 6400 □ VSX

Answer: **B** ([LEAVE A REPLY](#))

NEW QUESTION: 29

□□□□ □□□□ □□ □□□ □□□ □□□□ AOS-CX □□□□ □□□ □□□ □□□□□ □□□□ □□□. □□□□ □□
□□□ □□□ □□□□□ □□□. □□□□ □□ □□ □□□□ □□□□□ □□□□ □□□.
□□□□ □□ □□□□ □□□□ □□□?

- A. AOS-CX 8325
- B. AOS-CX 6300
- C. AOS-CX 8400
- D. AOS-CX 6400

Answer: **A** ([LEAVE A REPLY](#))

NEW QUESTION: 30

□□□□ □□□ □□□ □□□ □ □□□ □□ □□□□ □□ □□□ □□□ □□ □□□ □□□□ □□ □□□□. □□ AOS-
CX □□□ □□□ □□□ □□□□ □□ □□□ □□□□□?

- A. WFQ
- B. DWWR
- C. VOQ
- D. FIFO

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 31

□□□□ □□□□ □□□□□□.

switch# show capacities-status nae

System Capacities Status: Filter NAE

Capacity Status Name	Value	Maximum
Number of configured NAE agents currently active in the system	1	100
Number of configured NAE monitors currently active in the system	7	500
Number of configured NAE scripts currently active in the system	50	50

switch# show ntp status
NTP Status Information

NTP : Disabled
NTP Authentication : Disabled
NTP Server Connections : Using the default VRF

System time : Sat May 2 11:50:55 UTC 2020
NTP uptime : 0 minutes, 0 seconds

Not synchronized with an NTP server.

switch# show crypto pki certificate

Certificate Name	Cert Status	Associated Applications
local-cert	installed	captive-portal, hsc, https-server,
syslog-client		

switch# show crypto pki application

Associated Applications	Certificate Name	Cert Status
captive-portal		not configured, using local-cert
hsc		not configured, using local-cert
https-server		not configured, using local-cert
syslog-client		not configured, using local-cert

□□□□□ □ □□□ □□□□ □□ □□□ □□□□ □□□□?

- A. □ □□□□□ □□□□ □□ □□□□□ □□□ □□□□□.
- B. □ □□□□□ □□□□ □□ □ □□ □□□□ □□ □□□□□ □□□□□.
- C. □□□□□ □□□□□ AOS-CX □□□□ □□□ NTP □□□ □□□□□□□ □□□□□.
- D. AOS-CX □□□□ SSL □□□□ □□ □□ □□ □□□

Answer: B (LEAVE A REPLY)

NEW QUESTION: 33

□□□□ □□□□□ □□□□□□ NAE □□□□ □□□□ □□□ □□□□ □□□ □□□ □□ □□□ □□□□ □□□ □□ □□□. □□□□□ AOS-CX □□□□ NTP□□□ □□□□ □□□□□ □□□□□□□ □□□□□. □ □□□ □□□□□ □ □□ □□□□?


- A. AOS-CX □□□□ SSL □□□□ □□ □□ □□ □□□
- B. NetEdit □ AOS-CX □□□□ □□□ NTP □□□ □□□□□□□ □□□□□.
- C. □□□□ PC□ AOS-CX □□□□ □□□ NTP □□□ □□□□□□□ □□□□□.
- D. □□□□ □ □□□□□ AOS-CX □□□□ □□□ □□□□ □□□□ □□□ □□□□□.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 34

Which option correctly defines how to identify a VLAN as a voice VLAN on an AOS-CX switch?

- A. Switch(config)# vlan <VLAN-ID> voice
- B. Switch(config)# port-access Jidp-group <LLDP-group-name>
Switch(config-Hdp-group)# vlan <VLAN-ID>
- C. Switch(config)# vlan <VLAN-ID>
Switch(config-vtan-<VLAN*ID>)# voice
- D. Switch(config)# port-access role <role-name>

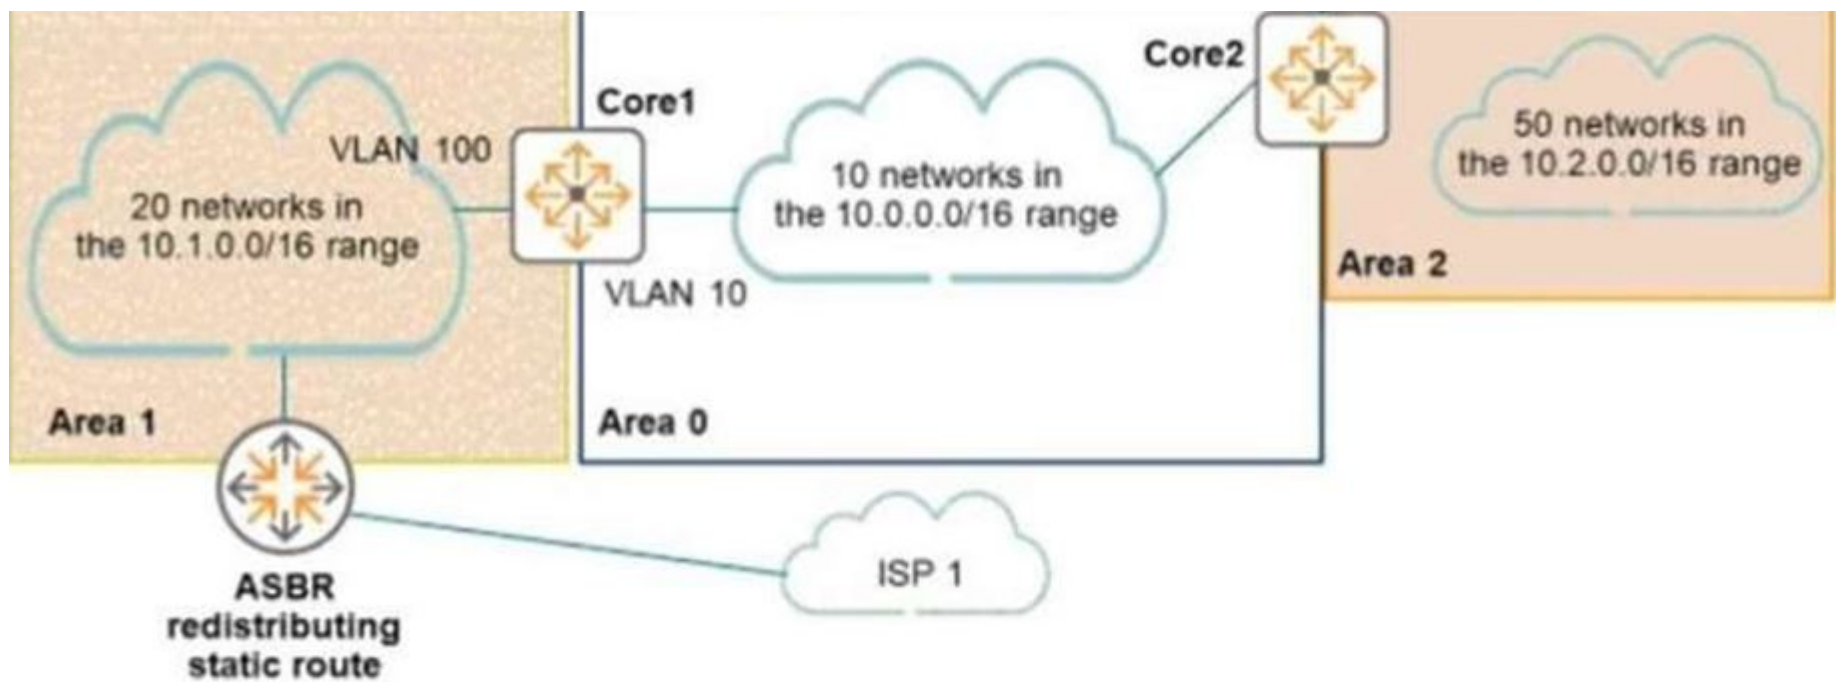

The network is configured for OSPF with the following attributes:

- * Core1 and Core2 and ABRs.
- * Area 1 has 20 networks in the 10.1.0.0/16 range
- * Area 0 has 10 networks in the 10.0.0.0/16 range
- * Area 2 has 50 networks in the 10.2.0.0/16 range
- * The ASBR is importing a static route into Area 1
- * Core2 has a summary for Area 2: area 0.0.0.2 range 10.2.0.0/16 type inter-area

Here is the OSPF configuration performed on Core1:

```
Core1(config)# router ospf 1
Core1(config-router)# router-id 10.0.0.1
Core1(config-router)# passive-interface default
Core1(config-router)# area 0.0.0.0
Core1(config-router)# area 0.0.0.1 stub
Core1(config-router)# area 0.0.0.1 range 10.1.0.0/16 type inter-area
Core1(config-router)# area 0.0.0.2
Core1(config-router)# area 0.0.0.0 range 10.0.0.0/16 type inter-area
Core1(config-router)# exit
Core1(config)# interface vlan 10
Core1(config-if)# ip address 10.0.1.1/24
Core1(config-if)# ip ospf 1 area 0
Core1(config-if)# exit
Core1(config)# interface vlan 100
Core1(config-if)# ip address 10.1.1.1/24
Core1(config-if)# ip ospf 1 area 1
Core1(config-if)# exit
```

□□ □□□ □□□□ □□ □□?

- A. Corel 00 OSPF 000 0000.
- B. 10000 2300 000 0000.
- C. Area 000 1300 000 0000.
- D. Corel 0 ASBR00 000 LSA Type 50 000000.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 38

0000 8.4 000 00000 Aruba AP 0 00000 000000 0000 00 00 00000 00000.
 0 00000 00 AAA 00000 000000. 0 0000 00 0000 00000 AOS-CX 6300 0 6400 00000 00000 0000
 0. 0000 00 0 00 0000 0000 00 0000 00 0 0000 0000 000000 0000.
 0000 00 00000 000000 00000?

- A. IPSec
- B. RADIUS 00 00 00
- C. 0000 00 0000
- D. 00000 0000 0000 00

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 39

0000 0000 00000 AOS-CX 00000 000000 000000. 0000 0000 0000 00 0000 0000 0000000 0000.
 00000 ClearPass 0000 000000 000000 00 00 0000 0000000?

- A. 00 0000
- B. 00000 0000 0000 00
- C. 0000 00 0000(UBT)
- D. 00 00(CoA)

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 40

AOS-CX 000000 00 00000 00 0000 000000 000000 0000 0000000?

- A. 00 VLAN 00
- B. WFQ(Weighted Fair Queueing) 00
- C. 0000 00 00 00000 00000
- D. QOS 00000 00 00000 00000

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 41

00000 00 0000 00000 AOS-CX 00000 000000 000000. 0000 00 000000 0000 0 00 000000 00000
 0000 000000 0000. 00 0000 00 0000 000000 00 0000 S02 1X0 000000. 00 000000 VoIP 0000 PC
 0 000000 000000. PC0 000000 0000 0000 000000 000000 LAN 0000 000000 0000 0000 0000 000000
 0.

- A. 0000 00 000000 00000000 0000000.

- B. 802.1X is used to authenticate devices on a network.
- C. 802.1X is used to authenticate devices on a network.
- D. 802.1X is used to authenticate devices on a network.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 42

A network administrator is configuring a switch for a new VLAN. The administrator enters the following commands in configuration mode:

```
switch(config)# vlan 10
switch(config-vlan)# name Sales
switch(config-vlan)# exit
switch(config)# interface gigabitEthernet 1/24
switch(config-if)# switchport mode access
switch(config-if)# switchport access vlan 10
```

- A. The switchport is configured as a trunk port.
- B. The switchport is configured as an access port.
- C. The switchport is configured as a trunk port.
- D. The switchport is configured as an access port.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 43

A network administrator is configuring a switch for a new VLAN. The administrator enters the following commands in configuration mode:

- A. IGMP snooping is enabled on the Layer-2 VLAN.
- B. IGMP snooping is disabled on the Layer-3 VLAN.
- C. IGMP snooping is disabled on the Layer-2 VLAN.
- D. IGMP snooping is enabled on the Layer-2 VLAN.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 44

A network administrator is configuring a switch for a new VLAN. The administrator enters the following commands in configuration mode:

- A. The switchport is configured as a trunk port.
- B. The switchport is configured as an access port.
- C. The switchport is configured as a trunk port.
- D. The switchport is configured as an access port.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 45

A network administrator is configuring a switch for a new VLAN. The administrator enters the following commands in configuration mode:

- A. 802.1X is used to authenticate devices on a network.
- B. 802.1X is used to authenticate devices on a network.
- C. 802.1X is used to authenticate devices on a network.

D. □□ □□□ □□□□ □□□.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 46

AOS-CX □□□□ □□□□ □□□ □□□ □□□ □□□□□ □□□□□. AOS-CX □□□ □□□ □□□□□.
ACCESS1(config)# show aaa authentication port-access interface all client-status

Port Access Client Status Details

Client 00:50:56:b1:7a:37

Session Details

Port : 1/1/3

Session Time : 1887s

Authentication Details

Status : mac-auth Authenticated

Auth Precedence : dot1x - Not attempted, mac-auth - Authenticated

Authorization Details

Role :

Status : Not ready

□ □□□ □□□□ □□□□ □□□ □□□ □□□□□?

A. □□□□ □□□ □□□ □□□ □□□□.

B. AAA □□□ □□ RADIUS □□ □□□ □□□□□□□.

C. □□□ 802.1X□□□ □□□□□ □□□.

D. MAC □□□ □□□□□ 802.1X □□□ □□ □□□□.

Answer: C ([LEAVE A REPLY](#))

HPE6-A73 □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ HPE6-A73 □□! DumpTop □ □□ **HPE6-A73** □
□ □□□ □□□□□□, DumpTop HPE6-A73 □□ □□□ □□□□□□□□ □□□ □□□□□□□. □□□□ □□□ □□
□□ □□ DumpTop HPE6-A73 □□□ □□□□□. <https://www.dumptop.com/HP/HPE6-A73-dump.html> (130 Q&As Dumps,
30%OFF Special Discount: KrDump)

NEW QUESTION: 47

□□□□ □□□□ □□□ □□□ □□ □□ □□ □□ □□ □□□□ □□□□ □□□□. □□□□ □□□□□□ □□ □□
□□ □□□ □□□□ □□□. □□□ □□□□ □□□ □□□ □□□ AOS-CX □□□□ □□ □□□□ □□□□.

AOS-CX □□□□ □□□□ □□ ERSPAN □□□ □□ □□□□ □□ □□ □□?

(□□□.)

A. □□ AOS-CX □□□□□ □□□ □□□ □□□□□□□□.

B. □□□ □□□□□ UDP□□□.

□ □□□ □□ □□□□ □□ □□?

- A. □□ □□□ □□□□ □□□.
- B. 802.1X□ □□ □□□□ □□□□□ □□□□ □□□.
- C. □□ □□□ □□ □□□□□ □□ □□□ □□□□ □□□.
- D. □□□ □□ □□□□ □□□□□□ □□□□□.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 51

□□□□ □□□□ NetEdit□ □□□□ AOS-CX □□□ □□□ □□ □□□□□□ □□□. □□□□ NetEdit □□□□ □□□ □ □/□□ □□□□ □□□?

- A. Aruba□□ □□□□ OVA □□□ □□□□ □□□□ □□□□ □□
- B. □□□□ Debian Linux □□□ □□□
- C. □□□□ RedHat Enterprise Linux □□□ □□
- D. □□□□ □□□□□□□ □□

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 52

□□□ □□ AAA □□ □□□□ □□□□. □□□ □□□ □□□□ MAC-Auth □ 802.1X□ □□□ □□□ □□□□ AOS-CX □ □□□ □□ □□□□□□□□□□. □ □□□ □□□ Aruba MC(□□□□ □□□□) □□□□ □□□□ □□□ □□ □□□□ □□□□□ □□□ □□□ □□□□□ □□□.

□□ □□□□ MC□ □□□□ □□ □□□□ □□□ □□□ □□□□ □□□□ □□ □□□□ □□ □□ □□?

- A. □□ □□ RADIUS VSA□ □□□□ □□ □□□ AOS-CX □□□ □ MC□ □□ □□
- B. AOS-CX □□□□ □□□ □□□□□ □□□ □□ □□□ □□ □□
- C. AOS-CX □□□□ □□□ □□□□□ □□□ □□□□ □□□ □□□ □□ □□
- D. AOS-CX □□□ □ MC□ □□□ □□ □□□ □□□□ □□□ □□□ □□ □□

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 53


□□□ □□□□ □□□ □□□ □□□ □□□□□□ □□ □□□□ □□□□. □□□□ □□ □ VoIP □□□ □□ □□□□□. □□□ □□□ □□□□ □□□□□□□ □□ □□□□□ □□ □□□□□ □□□□ □□ □□ □□ □□ □□□ □□□□□?

- A. AOS-CX □□□ □□□□□ VSX □□
- B. AOS-CX □□□ □□□□□ VSF □□
- C. □□□□□□ □□□□ ISSU(□□□□ □ □□□□□ □□□□□) □□ □□
- D. Always-On POE□ □□ AOS-CX 6300 □□ 6400 □□□□ □□□□□.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 54

□□□□ □□□□□ □□□□□.

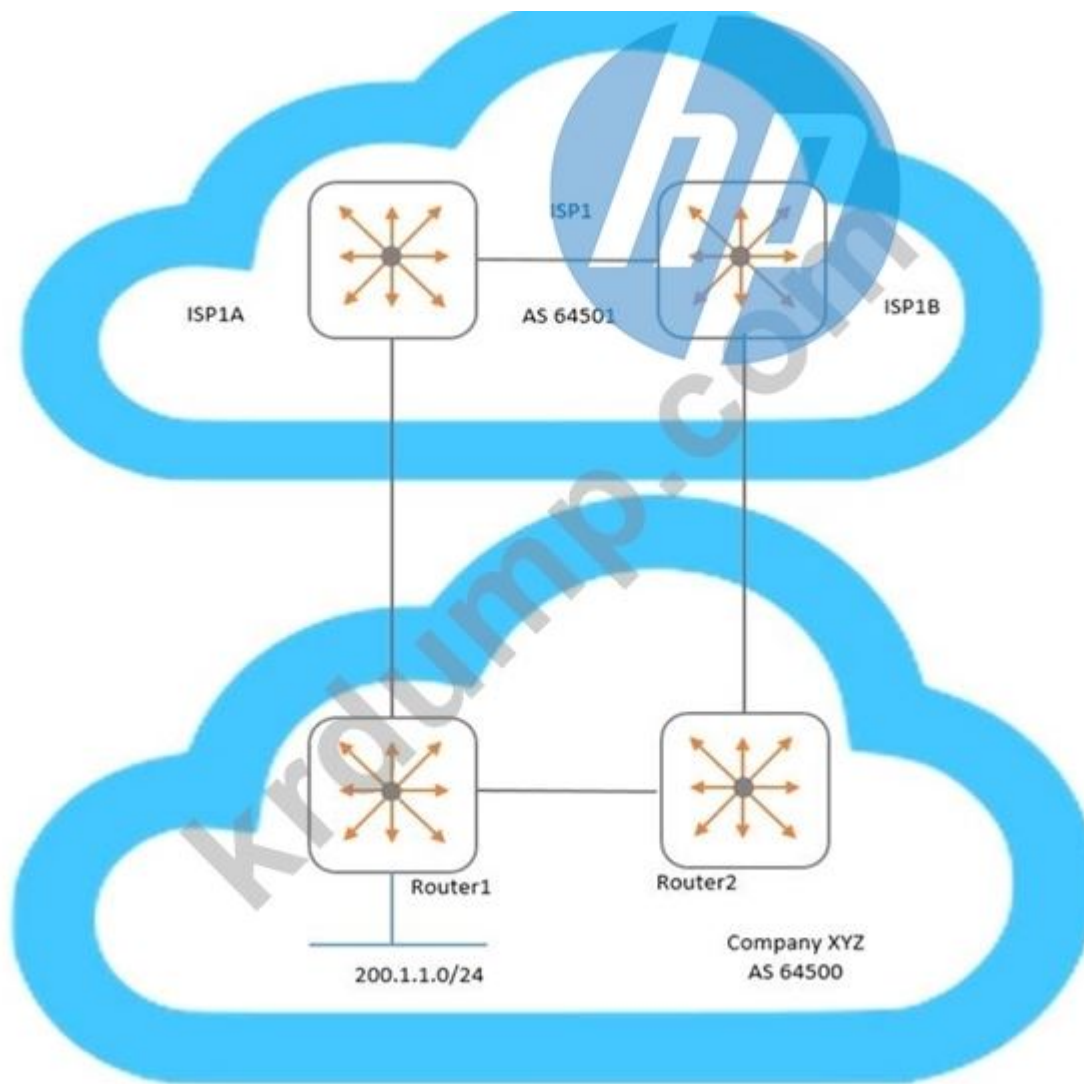

□□ XYZ□□ □□□ □□□(ISP1)□ □□ □ □□ □□□□ □□□□. Router1□ □□□ □□□ □□□□.

```
Router1(config)# ip prefix-list AS64500-routes permit 200.1.1.0/24
Router1(config)# route-map To-AS64501 permit seq 10
Router1(config-route-map)# match ip address prefix-list AS64500-routes
Router1(config-route-map)# set metric 100
Router1(config-route-map)# exit
Router1(config)# router bgp 64500
Router1(config-bgp)# address-family ipv4 unicast
Router1(config-bgp-ipv4-uc)# neighbor 192.168.1.1. route-map To-AS64501 out
```

Router2□ □□□ □□□ □□□□.

```
Router2(config)# ip prefix-list AS64500-routes permit 200.1.1.0/24
Router2(config)# route-map To-AS64501 permit seq 10
Router2(config-route-map)# match ip address prefix-list AS64500-routes
Router2(config-route-map)# set metric 200
Router2(config-route-map)# exit
Router2(config)# router bgp 64500
Router2(config-bgp)# address-family ipv4 unicast
Router2(config-bgp-ipv4-uc)# neighbor 192.168.2.1. route-map To-AS64501 out
```

Router1 □ Router2□ □□□ □□ □□ BGP □□□□ □□□□□?

- A. 100 100 1000
- B. AS 100 100
- C. 100
- D. 100 100

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 55

10000 10000 AOS-CX 100000 NAE 10000 10000. 10 100000 100000 100000 10 100000
 NAE 10000 1000 1000 1000 10 100 1000 100000.

"10000 100".

10000 1000 100000?

- A. 100000 NAE 100 1000 10 100 1000 100 1000 100000.
- B. 10000 100 100000 100 100000 1000 10000000.
- C. AOS-CX 100000 RESTful API 1000000 1000000.
- D. NAE AOS-CX 1000 100 100 1000 100000.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 56

NetEdit 100 100000 100 100000 1000 100000 10 100 1000000 1000000?

- A. ICMP
- B. DHCP
- C. ARP
- D. LLDP

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 57

AOS-CX 100000 100 100 10 100 1000 1000 100000 100 100 1000000?

- A. 10000000 10 1000000 100000 100000 1000 1000 10 100000.
- B. 1000 100 1000 1000 100000 1000
- C. 100 100 10 100000 1000 1000 100000 100000 100000 1000 10 100000.
- D. 100 100 10 100000 10 100000 1000000 1000 10 100000.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 58

10000 10000 AOS-CX 100000 NAE 10000 10000. 10 100000 100000 100000 10 100000
 NAE 10000 1000 1000 1000 100 1000 "10 1000" 1000 100000.

10000 1000 100000?

- A. 10000 100 100000 100 100000 1000 10000000.
- B. 100000 NAE 100 1000 10 100 1000 100 1000 100000.
- C. AOS-CX 100000 RESTful API 1000000 1000000.
- D. NAE AOS-CX 1000 100 100 1000 100000.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 59

□□□□□□ □□□ □□ □□□ AOS-CX □□□□ □□□□.
□□□ OSPF 1
□□ 0
□□ 1 □□ □□ □□
□□ 1□ □□ □□□ ABR□□□. □□□□ □□ 0□ 1□ □□□ □□□□ □□□ □□□□ □□□ □□□□.
□ □□□ □□ □□□ □□□ □□□□.
0□□: 5□ □□(LSA 1□, 2□)
1□□: 10□ □□(LSA 1□, 2□)
□□ □□: 2(LSA □□ 5)
□□ □□□ □□ □□□ □□□□ □□ 1□□ □ □ □□ OSPF □□□ □ □□□□?

- A. 15
- B. 12
- C. 6
- D. 11

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 60

□□□□ □□□□□ NetEdit□ □□□□ AOS-CX □□□□ □□□□ □□□□. □□□□□ □□ □□ VoIP □□□ NetEdit □
□□□□ □□□□ □□□ □□□□□□□. □□□□□ □□ □□□□□ NetEdit□ □□ □□□□ □□□□□ □□ □□□□□.
□□□□ □ □□□ □□□□ □□ □□□ □□ □□□□?
A. □□ VoIP □□□□ RESTful API □□□□
B. □□ VoIP □□□□ SSH □□□ □□□□
C. VoIP □□ SNMP □□□□ □□□□ NetEdit□□ □ □ □□ □□□ □□□□□.
D. □□□ □□□ AOS-CX □□□□□ □□□□□ LLDPO □□□□□□□□.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 61

□□□ □□□ □□□□□□.

D. □□

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 67

AOS-CX □□□□ □□ □□ □□□□□□□□ □□ □□□□ □□□□ □ NetEdit□ □□□ □□□□ □□□□ □□ □□ □□□□ □□ □□□□□□?

- A. □□ □□
- B. □□ □□
- C. □□ □□
- D. □□□ □□

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 68

ACL □ TCAM □□□ □□ □□□□ □□ □□?

- A. □□ □□□ □□□□ □□ ACE □□□ □□□ □□□□□□.
- B. AOS-CX □□□□ ASIC TCAM□ □□ □□□ □□□□ □□□□□□.
- C. VLAN □□□ ACL□ □□□□ □□ ACE □□□ □□□ □□□□□□.
- D. □□ □□□ ACL□ □□□□ □□ ACE □□□ □□□ □□□□ □□□□□.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 69

What is correct regarding rate limiting and egress queue shaping on AOS-CX switches'?

- A. Only a traffic rate and burst size can be defined for a queue
- B. Limits can be defined only for broadcast and multicast traffic
- C. □□ □□ □ □□□□ □ □□□□ □□□□□ □□□ □ □□□□.
- D. Rate limiting and egress queue shaping can be used to restrict inbound traffic.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 70

Examine the configuration performed on newly deployed AOS-CX switches;

```
Switch(config)# radius-server host cppm key plaintext aruba123 vrf mgmt
Switch(config)# aaa authentication port-access dot1x authenticator radius server-group cppm
Switch(config)# aaa authentication port-access dot1x authenticator enable
Switch(config)# interface 1/1/1 - 1/1/48
Switch(config-if)# aaa authentication port-access dot1x authenticator
Switch(config-if-dot1x-auth)# enable
Switch(config-if-dot1x-auth)# exit
Switch(config-if)# exit
```

After performing this configuration the administrator notices that the switch ports always remain in the EAP-start state. What should the administrator do to fix this problem?

- A. Set the ports to client-mode.


```

Switch(config)# class ip IoT-traffic
Switch(config-class-ip)# match ip 192.168.0.0/16 any
Switch(config-class-ip)# exit
Switch(config)# pbr-action-list reroute
Switch(config-prb-action-list)# default-next-hop 10.100.1.2
Switch(config-prb-action-list)# exit
Switch(config)# policy IoT-policy
Switch(config-policy)# class ip IoT-traffic action pbr reroute
Switch(config-policy)# exit
Switch(config)# interface vlan 999
Switch(config-if)# apply policy IoT-policy routed-in
Switch(config-if)# exit

```

□ □□□ □□□□ IoT □□□□ □□ □□□□ □□ □□?

- A. □□□ □□□□□ □□ □□□ □□□ □ □□ □□ □□□□ 10.100.1.2□ □□□□□□.
- B. 10.100.1.2□ □□□ □ □□ □□ □□□□ □□ IoT □□□□ □□□□ □□□□□.
- C. 10.100.1.2□ □□□□□ IoT □□□□ □□ □□□ □□□□□ □□ □□□ □□□□□.
- D. 10.100.1.2□ □□ □□ AOS-CX □□□□□ □□ □□□ □ □□□ □□ □ □□□□.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 73

AOS-CX □□□□ □□□□ □□□ □□□ □□□ □□□□□ □□□□□. AOS-CX □□□ □□□ □□□□□.

```
Access1(config)# show aaa authentication port-access interface all client-status
```

Port Access Client Status Details

Client 00:50:56:b1:7a:37

=====
Session Details

Port : 1/1/3

Session Time : 1887s

Authentication Details

Status : mac-auth Authenticated

Auth Precedence : dot1x - Not attempted, mac-auth - Authenticated

Authorization Details

Role :

Status : Not ready

□ □□□ □□□□ □□□□ □□□ □□□ □□□□□?

- A. □□□□ □□□ □□□ □□□ □□□□.
- B. AAA □□□ □□ RADIUS □□ □□□ □□□□□□□.
- C. □□□ 802.1X□□□□ □□□□□ □□□.
- D. MAC □□□ □□□□□ 802.1X □□□ □□ □□□□.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 74

□□□□□□ □□□ □□ □□□ AOS-CX □□□□ □□□□.

```
router ospf 1
  area 0
  area 1 stub no-summary
```

It is the only ABR for area 1. The switch has the appropriate adjacencies to routing switches in areas 0 and 1. The current routes in each area are:

Area 0: 5 routes (LSA Type 1 and 2)

Area 1: 10 routes (LSA Type 1 and 2)

External routes: 2 (LSA Type 5)

How many routes does the switch have in its routing table?

- A. 11
- B. 6
- C. 12
- D. 15

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 75

Which AOS-CX switch model is the most powerful? (Select one)

- A. AOS-CX S400
- B. AOS-CX 6400
- C. AOS-CX 6300
- D. AOS-CX 8325

Answer: ([SHOW ANSWER](#))

HPE6-A73 is a new addition to the HPE6-A73 series. DumpTop has the HPE6-A73 series! DumpTop has the HPE6-A73 series. DumpTop HPE6-A73 series. DumpTop HPE6-A73 series. <https://www.dumptop.com/HP/HPE6-A73-dump.html> (130 Q&As Dumps, 30%OFF Special Discount: **KrDump**)