

Salesforce.B2C-Commerce-Developer.v2023-11-20.q193

□□□□:	B2C-Commerce-Developer
□□□□:	Salesforce Certified B2C Commerce Developer
□□□:	Salesforce
□□ □□ □□□:	193
□□:	v2023-11-20
# □□ □:	1219
# □□ □□□:	1930
https://www.krdump.com/Salesforce.B2C-Commerce-Developer.v2023-11-20.q193.html	

NEW QUESTION: 1

□□ □□□ □□ □□□□ □□ □□□□ □□ □□ □□ □□ □□ ID□ □□□ □ □□□ □□□. □□□ □□□ □□□□. □□□ □□ ID□ □□ □□ □□□□ □□ □□□□ □□□□□ □□□□ □□□□.

```
if (address.ID !== addressForm.addressid.value) {
  for (var i = 0; i < addressBook.addresses.length; i++) {
    if (addressBook.addresses[i].ID === addressForm.addressid.value) {
      addressForm.invalidateFormElement();
      throw new Error('Address name already exists');
    }
  }
}
```



□□□ □□□□ □□ ID □□ □□□ □□ □□□□ □□□□□ □ □□□ □□□ □□□□ □□□?

- A. addressForm.invalidateFormElement("addressid");
- B. addressForm.addressid.invalidateFormElement();
- C. addressForm.invalidateFormElement(addressForm.addressid);
- D. addressForm.addressid.invalidateFormElement = □;

Answer: A (LEAVE A REPLY)

NEW QUESTION: 2

Universal Containers□ □□□ □□ □□ □□□ "The Basics"□□ □□□ □□□ □□ ID□ □□□□□.

- * □□ 103 □□□□ 1□
- * □□ 611 □□□□ 5□
- * □□ □□ 201 □□□□

□□□□ □□□□□□ □ □ □□ □□□ □□□□□□.

□□□□ "□□"□ □□□□ □□ □□□□ □□□□ □□ □□□ □□□□□?

- A. □□ □□ □□□□ "The Basics"□□ □□ □□□ □□□□.
- B. □□ □□□□ "The Basics"□□ □□□ □□□ □□ □□ □□ □□□□□.
- C. □□ □□□□ "The Basics"□□ □□□ □□□ □□ □□ □□ □□□□□.

D. `var myBusinessController = require('app_project/MyBusinessControiier.3s');`

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 3

Which of the following is the correct way to require the `MyBusinessController` module in the `app_project` directory? The `MyBusinessController` module is located in the `client_project` directory.

- A. `app_project:client_project:storefront_controllers:storefront_core`
- B. `client_project:app_project:storefront_controllers:storefront_core`
- C. `app_project:storefront_controllers:storefront_core`
- D. `storefront_core:storefront_controllers:client_project:app_project`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 4

Which of the following is the correct way to send a POST request to the `B2C Commerce Staging` endpoint using the `OCAPI` API?

- A. Siempre que sea un objeto standard sera put en vez de post
- B. Stores Data OCAPI `POST`
- C. Stores Data OCAPI `PUT`
- D. Stores Data OCAPI `PATCH`
- E. Stores Data OCAPI `POST`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 5

The `steptype.json` file is located in the `app_project` directory. The `steptype.json` file contains the following code:

```
"No_FILES_FOUND": {
  "status": "NO_FILES_FOUND"
}
```

- A. `var status = {status: 'NO_FILES_FOUND'};`
- B. `var status = require('dw/system/status');`
- C. `this.status = 'NO_FILES_FOUND'`
- D. `'NO_FILES_FOUND'`

Answer: B ([LEAVE A REPLY](#))

D. □□ □□□ □□□ □□ □□□ □□□.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 9

SFRA □□□ □□□ □□□□□ □□□□ □□□□□ □□□□ □□□ □□ □□□□ □□□□□ □□□□ □□□□ □□ □□ □□□ □ □□□□?

- A. npm run compile:scss, npm run compile:html, npm run clean
- B. npm □□ □□□:js, npm □□ □□□: scss, npm □□ □□□:html
- C. npm run compile:js, npm run compile:scss, npm run compile:fonts
- D. npm run compile:js, npm run compile:html, npm run clean

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 10

□□□ □□□□ □□ □□□ □□□ □□□□ □□□.

```
var Logger = require('dw/system/Logger');

var urlEmail = 'https://api.weibo.com/2/account/profile/email.json' + accessTokenSuffix;

http.open('GET', urlEmail);
http.send();

var resultEmail = http.getText();

if (200 !== http.statusCode) {
    // Log Invalid Status Code
}
```

HTTP □□ □□□ □□□ □□ □□□ □□ □□ □□□ □□□□ □□□□□?

- A. logger.getLogger('profile').debug("□□□ □□□ □□ □□, □□ □□: ", http.statusCode);
- B. logger.debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);
- C. Logger.getLogger('profile').debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);
- D. Logger.getLogger().debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 11

□□□□ □□□□ □□□ □□□□□□ □□□□ □□□ □ □□□ □□□□□ □□□□ □□ □□□□ □ □□□ □□□□□ □□□□ □□□.

□□ □□ □□□ □□□ □ □□ □□ □□□□□ □□□□ □□ □□ □□□ □□□□□?

- A. Common Phrase Dictionary □□ □□□: □□□ □□□□.
- □□ □□ □□□ □□□□□.
- B. Common Phrase Dictionary □□ □□□: □□□ □□□□, □□□, □□ □□.
- □□ □□ □□□ □□□□□.

- C. `firstWord`: `String`, `String`, `String`.
`firstWord` `String` `String`.
- D. `firstWord`: `String`, `String`, `String`.
`firstWord` `String` `String` `String`.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 12

Which of the following is a valid OCAP (Open Commerce API) request?
A.

```
POST /dw/shop/v18_3/products/(creative-zen-v,namco-we-ski-wii)?client_id=aaaa...
HTTP/1.1 Host: example.com
```

- Which of the following is a valid OCAP request?
A. `URI /dw/shop/v18_3/products/creative-zen-v`
B. `HTTP GET /dw/shop/v18_3/products/creative-zen-v`
C. `HTTP PUT /dw/shop/v18_3/products/creative-zen-v`
D. `HTTP POST /dw/shop/v18_3/products/creative-zen-v`

Answer: B (LEAVE A REPLY)

NEW QUESTION: 13

- Which of the following is a valid OCAP request?
* `URI /dw/shop/v18_3/products/creative-zen-v`
* `HTTP GET /dw/shop/v18_3/products/creative-zen-v`
* `HTTP PUT /dw/shop/v18_3/products/creative-zen-v`
* `HTTP POST /dw/shop/v18_3/products/creative-zen-v`
Which of the following is a valid OCAP request?
A. `URI /dw/shop/v18_3/products/creative-zen-v`
B. `HTTP GET /dw/shop/v18_3/products/creative-zen-v`
C. `HTTP PUT /dw/shop/v18_3/products/creative-zen-v`
D. `HTTP POST /dw/shop/v18_3/products/creative-zen-v`

Answer: D (LEAVE A REPLY)

NEW QUESTION: 14

- Which of the following is a valid OCAP request?
A. `require()`
B. `importPackage()`

C. ☐ ☐

D. □□

E. ☐☐☐☐☐

Answer: A,C,D (LEAVE A REPLY)

□ □ :

NEW QUESTION: 18

□□□ □□□□ □□□□□□ UX Studio□ □□□□ □□□ □□□ □□ □□□ □□□□ □□□.

□ □□□ □□□□ □ □□□ □ □□ □□□ □□□□□? (3□□ □□□□□.)

A. ☐☐☐☐ ☐☐☐ ☐☐☐☐

B. ☐☐☐☐ ☐☐☐ ☐☐☐ ☐☐

C. ☐☐☐☐☐ ☐☐

D. ☐☐☐☐ ☐☐☐ ☐☐

E. ☐ ☐ ☐ ☐ ☐ ☐

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 19

Universal Containers □ □ □ □ □ □ □ □ □ □.

☐☐☐ ☐☐ ☐☐☐ ☐☐☐☐ ☐☐☐☐ ☐☐☐☐ ☐☐☐?

A. ☐☐ ☐☐ ☐☐☐☐ ☐☐ ☐☐☐☐☐☐.

B. ☐☐ ☐☐ ☐☐☐ ☐☐☐☐ ☐☐ ☐☐☐☐☐☐.

C. □□ □□ □□□ □□□□□.

D. □□ □□ Allocation □(□, 10□ □□ □□□)□□ □□□□ □□□□ □□□□□.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 20

Universal Containers □ □□□ □□□ □□□ □□□□ □□ □□□ □□ □□ □□□ □□□□□. □□□ □□□□ □□□□ □□□□ □
□□□□ □□□ □□ □□ □□□ □□□□□ □□□□ □□ □□ □□ □ □□□□ > □□□□ □ □□□□ □□□ □□□□ □□□□□ □
□□ □□□□□.

□□□ □□□ □□□□□ □□ □□ □□□□ □□□ □□□□□□ □□□ □□□□□ □□□□ □□□ □□ □□□?

A. Business Manager □□□ □□ □□□ □□□□ □□ □□□□ □□□□□□ □□□□□ □□□□□.

B. Business Manager□ □□□□ □□ Developer□□ □□ □□□□ □□□ □□□ □□□□□ □□□□□.

C. Business Manager ☐☐☐ ☐☐☐☐ ☐ ☐☐☐☐ ☐☐☐ ☐☐☐☐ ☐☐☐☐.

D. □□□□ □□□□ □□□ □□□□ □ □□□□ □□□ □□□□ □□□ □□□□□.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 21

Universal Containers ☐ ☐ ☐☐☐ ☐☐ ☐☐☐ ☐☐☐☐☐ ☐☐☐. ☐☐☐☐ ☐☐☐ ☐☐ ☐☐☐☐☐.

☐☐☐ ☐☐☐☐ ☐☐ ☐☐☐ ☐☐☐☐ ☐☐☐☐ ☐☐☐

A. ☐☐ ☐☐☐ ☐☐ ☐☐ ☐☐☐ ☐☐☐☐☐☐.

- B. `dw.system.Logger.getLogger('login').debug("Login API has succeeded");`
- C. `dw.system.Logger.getLogger('login').info("Login API has succeeded");`
- D. `dw.system.Logger.getLogger('login').error("Login API has succeeded");`

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 22

Which of the following is a valid URL?

```
dw.system.Logger.getLogger('login').debug("Login API has succeeded");
```

- Which of the following is a valid URL?
- A. `http://sitegenesis.demandware.net/dw/data/v18_3/inventory_lists/ecom-inventory/product_inventory_records/00883408601`
- B. `http://sitegenesis.demandware.net/dw/data/v18_3/inventory_lists/ecom-inventory/product_inventory_records/00883408601`
- C. `http://sitegenesis.demandware.net/dw/data/v18_3/inventory_lists/ecom-inventory/product_inventory_records/00883408601`
- D. `http://sitegenesis.demandware.net/dw/data/v18_3/inventory_lists/ecom-inventory/product_inventory_records/00883408601`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 23

Which of the following is a valid URL?

URL `http://sitegenesis.demandware.net/dw/data/v18_3/inventory_lists/ecom-inventory/product_inventory_records/00883408601`

```
http://sitegenesis.demandware.net/dw/data/v18_3/inventory_lists/ecom-inventory/product_inventory_records/00883408601
```

Which of the following is a valid URL?

- A. `/inventory_lists/**`
- B. `/inventory_lists/*`
- C. `/inventory_list_search`
- D. `/inventory/*`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 24

ISML `<include template="util/modules">`

```
<include template="util/modules">
```

A.

```
<include template="util/customtags">
```

B.

```
<include url="{URLUtils.url('CustomTag-Start')}>
```

C.

```
<iscript>
    dw.util.CustomTagMgr.createCustomTag("mytag");
</iscript>
```

D.

Answer: B ([LEAVE A REPLY](#))


```

var Logger = require('dw/system/Logger');

var urlEmail = 'https://api.weibo.com/2/account/profile/email.json' + accessTokenSuffix;

http.open('GET', urlEmail);
http.send();

var resultEmail = http.getText();

if (200 !== http.statusCode) {
    // Log Invalid Status
}

```

HTTP status code is 200. What is the output of the following code?

- A. logger.getLogger('profile').debug("HTTP status code is 200. Status: ", http.statusCode);
- B. logger.debug("HTTP status code is 200. Status: {0} ({1}) ", http.statusCode);
- C. Logger.getLogger('profile').debug("HTTP status code is 200. Status: {0} ({1}) ", http.statusCode);
- D. Logger.getLogger().debug("HTTP status code is 200. Status: {0} ({1}) ", http.statusCode);

Answer: (SHOW ANSWER)

NEW QUESTION: 28

Which of the following is true?

- * HTTP status code is 200. What is the output of the following code?
 - * LocalServiceRegistry is a service registry that is used to register and lookup services.
 - * The LocalServiceRegistry API is used to register and lookup services.
- A. The LocalServiceRegistry mockFill method is used to register and lookup services.
 - B. The LocalServiceRegistry mockfull method is used to register and lookup services.
 - C. The LocalServiceRegistry mockFull method is used to register and lookup services.
 - D. The LocalServiceRegistry mockFull method is used to register and lookup services.

Answer: (SHOW ANSWER)

NEW QUESTION: 29

Which of the following is true?

<isloop var="{pdict.Basket.products}" var="loopstatus" loopstatus="loopstatus">

...

- A. loopstatus
- B. pdict.Basket.products{loopstatus}
- C. pdict.Basket.products{loopstatus}
- D. pdict.Basket.products{loopstatus}

Answer: B (LEAVE A REPLY)

A. `addressForm.addresssid.invalidateFormElement();`
B. `addressForm.invalidateFormElement("addressid");`
C. `addressForm.invalidateFormElement(addressForm.addressid);`
D. `addressForm.addresssid.invalidateFormElement = ☐;`

Answer: C (LEAVE A REPLY)

NEW QUESTION: 36

□□□□ □ □□ □□□□ □□□ □□□□ □□□.

□□ □□□□ □□□ □□□ □□□□□?

A. $< \square$

```
href="${URLUtils.get('Account-Show')}>${Resource.msg('myaccount','account',request.locale())}</a>
```

B. `<a href="{URLUtils.url('Account-Show')}">${Resource.msg('myaccount','account',null)}</a>`

C. `<a href="${url.get('Account-Show')}>${Resource.message('myaccount')}</a>`

D. `<a href="{URL}">`

```
('Account-Show'))>${ResourceMgr.getProperties('myaccount','account',null)}</a>
```

Answer: B (LEAVE A REPLY)

NEW QUESTION: 37

□□□ □□□□ □□□□□ □□□ □□□ □□□□□.

□□□ □□ □ □□□ □□ □□□ □□□□□?

A. □□□ □□□ □□□ □□ □□ □□□ □□□□□□.

B. □□ □□□□ □□□ □□□ □□□□ □□□ □□ □□ □□□□.

C. B2C Commerce □ □□ □□□ □□□□□□.

D. □□□ □□□□ □□ □□□□□ □□ □□ □□□□□.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 38

Storefront /search_suggestion(Shop API) /search_suggestion(Shop API). ?

A. view type□ □□□□ □□□□ view type□ □□□□ □□ □□ □□□□ □□□ □□□ □□□□.

B. view type□ □□□□ □□□□ view type□ □ □ □ □□ 'large'□ □□□ □□□ □□□□□ □□□□□.

C. `view_type` ☐ ☐ ☐ ☐ ☐ ☐ `view_type` ☐ ☐ ☐ ☐ ☐ ☐ ☐ `'small'` ☐ ☐ ☐ ☐ ☐.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 39

□□□□ □□□ □□□□ □□□ □□ □□□ □□□□□ □□ □□□ □□□□□ □□□. □□□□ □□, □□, □□, □□□□
□ □ □□□□. □□□□ □□□ □□□□ □□□□?

A. ☐ ☐ ☐

B. ☐ ☐ ☐

C. ☐ ☐ ☐ ☐

Answer: C (LEAVE A REPLY)

NEW QUESTION: 40

Which two JSON objects are used to define the layout of a component? (Choose two.)

- A. component_type_inclusion
- B. layout_type_inclusion
- C. component_type_Exclusions
- D. layout_type_exclusion

Answer: A (LEAVE A REPLY)

NEW QUESTION: 41

Which two statements are true about the JavaScript code in the image? (Choose two.)

- A. The code is valid.
- B. The code is invalid.
- C. The code is valid.
- D. The code is invalid.

Answer: C (LEAVE A REPLY)

00/00:

NEW QUESTION: 42

Which two statements are true about the code in the image? (Choose two.)

- A. The code is valid.
- B. The code is invalid.
- C. CreditCardType.json is a valid JSON object.
- D. The code is valid.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 43

Which two statements are true about the code in the image? (Choose two.)



- A. ISML('content/customLandingPage');
- B. ISML.render('content/custom/customLandingPage');

- C. ISML.renderTemplate('content/custom/customLandingPage');
- D. ISML.renderTampate('□□□□/□□□/□□/□□□/□□/customLandingPage');

Answer: C (LEAVE A REPLY)

NEW QUESTION: 44

□□□ □□□□ □□ □□□ □□ □□ □□□ □□□□ □□□□. □□ OCAPI(Open Commerce API) □□□ □□□□ □□□□ □□□ □.

```
POST /dw/shop/v18_3/products/(creative-zen-v,namco-we-ski-wii)?client_id=aaaa...
HTTP/1.1 Host: example.com
```

- □□□ □□□ □□□□ □□□?
- A. □□□ □□ □□□ □□□□□.
- B. HTTP □□□ PUT□□ □□□□□.
- C. HTTP □□□ GET□□ □□□□□.
- D. URI□ /dw/shop/v18_3/products/creative-zen-v□ □□□□□.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 45

□□□ □□□□□□ □□□ □□□□□ □□□ □□□ □□□ □□ □□□□□ □□ □□□ □□□□ □□□□. □□□ □□□□ □□□ □□□□□ □□ □□□ □□□ □□□□□ □□□ □□□□□. □□□□ □□□□ □□□□ □□□ □□□□□ □□□ □□□□□. □□□□ □□□□ □□□□ □□□ □□□□ □□□ □□□□□ □□□ □□□□ □□□□ □□□□ □□□ □□ □ □□ □□□ □□□□□?

- A. □□□ □□□□ □ □□□□ □□□ □□□□ □□□ □□□□□ □□□ □□□□□ □□ □□□□□ □□□□□.
- B. □□□ □□□□ □ □□□□ □□□ □□□□ □□□ □□□□□ □□□□ □□□ □□□□ □□□□ □□□□ □□ □□□ □□□ □□.
- C. □□□□ □□□□ □□□ □□□□ □□□ □□□□□ □□□□□.
- D. □□□□ □□□□ □□□ □□□□ □□□ □□□□□ □□□□ □□ □□□ □□□□ □□ □□ □□□ □□□□□.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 46

□□□ □□□□ □□□□□ □□□ □□□□ □□ Open Commerce API □□□ □□□□ □□□□. □□ □□□ □□□ □□□□□.

```
{
  "resource_id": "/baskets/**",
  "methods": ["get"],
  "read_attributes": "(**)",
  "write_attributes": "(**)"
}
```

- □□□□ □□□ □□□□□ □□□ □ □□□□?
- A. "resource_id" □□ "/baskets/*/items"□ □□□□□.
- B. "write_attributes" □□ "(+□)"□□ □□□□□.
- C. "read_attributes" □□ "(□□)"□□ □□□□□.

□ □ :

KrDump)

Answer: C (LEAVE A REPLY)

□□□ □□□□ □□□□□ □□ □□ □□ □□□□□.

```
dw.system.Logger.getLogger('login').debug("Login API has succeeded");
```

D.

Answer: A,C (LEAVE A REPLY)

SFRA □□ □□□ □□□□ □□ □□□ □□□□ □□ □□□□ □□ □□ □□□ CSRFB □□ □□□ □□□□□□.

```

<form ... action="submit">
    <input name="$ (dw.web.CSRFProtection.getTokenName())"
        value="{dw.web.CSRFProtection.generateToken()}">
    ...
    <the rest of the Form Fields>
    ...
</form>

```

Which of the following is a valid CSRF token name? (Select all that apply.)

* ☐ csrfToken

* validationAjax

Which of the following is a valid CSRF token name? (Select all that apply.)

A. ☐ csrfToken

B. ☐ validationAjax

C. ☐ csrfToken

D. ☐ validationAjax

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 50

Which of the following is a valid CSRF token name? (Select all that apply.)

☐ csrfToken

A. ☐ csrfToken

B. ☐ validationAjax

C. ☐ csrfToken

D. ☐ validationAjax

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 51

Which of the following is a valid CSRF token name? (Select all that apply.)

```

var paymentInstruments = order.getPaymentInstruments(PaymentInstrument.METHOD_DW_APPLE_PAY).toArray();

if (!paymentInstruments.length) {
    // Log Error Message
    return null;
}

var paymentInstrument = paymentInstruments[0];
var paymentTransaction = paymentInstrument.getPaymentTransaction();

```

Which of the following is a valid CSRF token name? (Select all that apply.)

A. `Logger.exception('Apple Pay transaction failed: ' + paymentInstruments);`

B. `Logger.getLog().log('Apple Pay transaction failed: ' + paymentInstruments);`

C. `Logger.fault('Apple Pay transaction failed: ' + paymentInstruments);`

D. `Logger.error('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 52

□□□□ □□ □□□ □□□□ □□□□ LINK □□□□□ Cart-Show □□□□ □□□ □□□ □□□□□□. Cart-Show □□□□ □□□ □□□ □□ □□□ □□□□ □□ □□□ □□ □□□ □□□□.

□□□□□□ LINK □□□□□□ □□□□□□ □□□ □□ □□ □□□ □□□□ □□□ □□□□ □□ □□□ □□□□ □□□?

A. □□□□□□ □□□□□□ Cart-Show □□□□□ □□□ □□□□ □□□ □□ □□□□ □□□□□□.

B. □□□□□□ □□□□□□□ Cart-Show □□□□□ □□□ □□□□ □□□ □□ □□□□ □□□□□□. □□□□□□ □□□□□ □ U.HK □□□□□ m □□□□□ □□□ □□□ □□□ □□□□□□.

C. □□□□□□ □□□□□□□ Cart-Show □□□□□ □□□ □□□□ □□□ □□ □□□□ □□□□□□.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 53

□□ ISML □□□ □□□□ □□□□ □□ □□□□ □□ □□□ □□□ □□□□ □□□?

`<isloop □□ ="${pdict.Basket.products}" var="□□" □□= "loopstatus">`

...

`</isloop>`

A. □□□□.□□

B. □□

C. `pdict.Basket.products{loopstatus}`

D. `pdict.□□`

```
<isloop iterator = "${pdict.Basket.products}" alias = "product">
<isprint value = "${product.name}"> <BR>
</isloop>
```

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 54

□□□ □□□□ □□ □□ □□□ □□ □□□ □□ □□□ □□□□ □□□□. □ □□□ □□□ □□□ de□□□□.

□□□□ □□□ □□□ □□ □□□ □□□□ □□□?

A. □□□/□□□

B. □□□/□□/□□□

C. □□□/□

D. □□□/□□□

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 55

□□□□□□ □□□ □□□□□ □ □□ B2C Commerce □□□□□ □□□ □□□□. □□□□ □□ □□□□□ □□ □□□ □□ □□□□□ □□. □□□□ □□□ □□□ □□ □□□ □□ □□ □□ □□□□ □□ □□□□□□.

NEW QUESTION: 57

□□ □□□ □□□□□□.

* □□□□ Storefront □□□□□ □□□ □□ 3□□ □□ □□ □□□ □□□□.

□□□ > □□ > □□

* □□□□ □□□□□□ □□□ □□□ □□ □□□□ □□□ □□□□□ □□□□.

* □□ □□□ □□ Newness□□ □□ □□□□ □□□□ □□□□□□□.

□□□□□□ □□ □□□ □ □ □□ □□□□ □□□□ □□□□ □□□□□. □□□ □□□□ Storefront □□□ □□ □□□ □□□ □ □□ □□□□ □ □ □□□□.

□□□ □□□□□?

A. □□ □□□ □□□ □□ □□□ □□ □□□□ □□□□□.

B. □□ □□□ □□□ □□ □□□□□ □□ □□□□ □□□□□.

C. □□ □ □□ □□□□ □ □□□ □□ □□ □□□ □□□ □□□□□.

D. New Arrivals □□□□□ □□ □□ □□ □□□ □□□□ □□□□□.

Answer: (SHOW ANSWER)

NEW QUESTION: 58

□□□□ dw.json □□□ □□□□ □□□ □□□□ □ □□□ □□□□□ □□□□ □□□.

npm □□□□□ □□□ □ □□□ □ □□ □□□□□ □□□□□? (3□□ □□□□□.)

A. □□□ □□

B. □□□ □□/□□□□

C. □□ □□

D. CSRF □□

E. □□□ ID

Answer: C,D,E (LEAVE A REPLY)

NEW QUESTION: 59

□□ □□□ □□□□□□.

* □□□□ Storefront □□□□□ □□□ □□ 3□□ □□ □□ □□□ □□□□.

□□□ > □□ > □□

* □□□□ □□□□□□ □□□ □□□ □□ □□□□ □□□ □□□□□ □□□□.

* □□ □□□ □□ Newness□□ □□ □□□□ □□□□ □□□□□□□.

□□□□□□ □□ □□□ □ □ □□ □□□□ □□□□ □□□□ □□□□□. □□□ □□□□ Storefront □□□ □□ □□□ □□□ □ □□ □□□□ □ □ □□□□.

□□□ □□□□□?

A. □□ □□□ □□□ □□ □□□□□ □□ □□□□ □□□□□.

B. New Arrivals Category□ □□ □□ □□□ □□□ □□□□ □□□□□.

C. □□ □ □□ □□□□ □ □□□ □□ □□□□ □□ □□□ □□□ □□□□.

D. □□ □□□ □□□ □□ □□□ □□ □□□□ □□□□□.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 60

Which of the following is a valid use case for the Storefront Toolkit?
A. To create a new storefront
B. To create a new storefront
C. To create a new storefront
D. To create a new storefront

- A. To create a new storefront
- B. To create a new storefront
- C. To create a new storefront
- D. To create a new storefront

Answer: C (LEAVE A REPLY)

URL: https://documentation.b2c.commercecloud.salesforce.com/DOC3/index.jsp?topic=%2Fcom.demandware.dochelp%2Fcontent%2Fb2c_commerce%2Ftopics%2Fstorefront_toolkit%2Fb2c_storefront_toolkit_tools.html

NEW QUESTION: 61

Which of the following is a valid use case for the Storefront Toolkit?

Administration > Sites > Manage Sites > RefArch - General

General Settings Cache Site Status Page Meta Tag Rules

RefArch - General

Fields with a red asterisk (*) are mandatory. Click Apply to save the details. Click Reset to revert to the last saved state.

ID: RefArch

Name: RefArch

Time Zone: Etc/UTC

Default Currency: US Dollar

Taxation: RefArch

Customer List: RefArch

Brand: RefArch

Billing Entity: RefArch

Description: RefArch

- A. To create a new storefront
- B. To create a new storefront
- C. To create a new storefront
- D. To create a new storefront

Answer: (SHOW ANSWER)

B2C-Commerce-Developer □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ B2C-Commerce-Developer □□! DumpTop
□ □□ **B2C-Commerce-Developer** □□ □□□ □□□□□□, DumpTop B2C-Commerce-Developer □□ □□□ □□□□□□□□
□□□ □□□□□□□. □□□□ □□□ □□□□ □□ DumpTop B2C-Commerce-Developer □□□ □□□□□.
<https://www.dumptop.com/Salesforce/B2C-Commerce-Developer-dump.html> (208 Q&As Dumps, **30%OFF** Special Discount:
KrDump)

NEW QUESTION: 62

□□ □□□□ □□□□□.

* Server.append('□□' , □□(□□, □□, □□))

SFRA□ □□□ □□□□□ □□□□ □□□□ □□□□ □□ □□ □□□ □□□□ □□□ □□□ □□□□ □ □□ □□□ □□
□□□?

□□ 2□ □□

A. res.render('/content/myPage',{
□□□: myDataObject
});
□□();
});

B. res.render('/content/myPage');
□□();
}).□□{(
□□□:myDataObject
});

C. res.viewData = {
□□□: myDataObject
};
res.render('/content/myPage');
□□();
});

D. res.setViewData({
□□□: myDataObject
});
res.render('/content/myPage');
□□();
});

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 63

□□□□ □□□ □□□ □□□□ □□ □□□□ □□□ □ □□□ □□□□. □□□ □□□ □□□□ □□□□□ □□□ □ □□□□ □ □
□□ □□ □□□□ □□□ □ □□□ □□□.

□□□□ □□□□ □□□□ □□□□ □□□□ □□ □□□ □ □□□ □□□ □□□ □□ □□ □□□?

- A. □□□□□ □□ □□□ □□ □□□□□.
- B. □□□ □□ StockLevel = maxAllocation□ □□□□□.
- C. □□□ □□□ ATS(Available to Sell) □□□□ □□□□□.
- D. □□ □□ □□□□ □□ □□□ □□

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 64

□□ □□□ □□ □□□□ □□ □□□□ □□ □□ □□ □□ □□ ID□ □□□ □ □□□ □□□. □□□ □□□ □□□□. □□□ □□
ID□ □□ □□ □□□□ □□ □□□□ □□□□□ □□□□ □□□□.

```
if (address.ID !== addressForm.addressid.value) {  
  for (var i = 0; i < addressBook.addresses.length; i++) {  
    if (addressBook.addresses[i].ID === addressForm.addressid.value) {  
      addressForm.invalidateFormElement();  
      throw new Error('Address name already exists');  
    }  
  }  
}
```

□□□ □□□□ □□ ID □□ □□□ □□ □□□□ □□□□□ □ □□□ □□□ □□□□ □□□?

- A. addressForm.addresssid.invalidateFormElement();
- B. addressForm.invalidateFormElement(addressForm.addressid);
- C. addressForm.addresssid.invalidateFormElement = □;
- D. addressForm.invalidateFormElement("addressid");

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 65

Storefront□ □ □□□ □□□□ □□ □□□□ □□□□ □□ □ □□ □□□ □□□□□?
□□ 3□ □□

- A. □□□ □□□ Storefront □□□□□ □□□□ □□□□□.
- B. □□□ □□□ □□□□ □□ □□□□□.
- C. □□□ □□□ □□
- D. □□ □□□□ □□□□□□□.Tengo dudas con el A. REVISAR
- E. □□□ □□□ □□□ □□□□.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 66

□□□□ □□□ □□□□□ □□□□ □□□ □□□□ □□□□. □□□ dw.system.Log □□□□ □□□□ □□ □□ □□ □ □□□ □
□□. □□□□□ □□ □□□□□ □□ □□□ □□□□□?

- A. □□
- B. □□
- C. □□□

Answer: (SHOW ANSWER)

NEW QUESTION: 67

□□□□ Taxation: Net□□ □ □□□□ □□□□□□. □□□ □□□□ □□ □□□ □□□□ □□ □□□□ Taxation:Gross□□ □□□. Business Manager □□□□□□ □ □□□ □□□□ □□□□. □□□□ □□□□□ □□□□□ □□ □□□ □□□□□? A. □□□ □□□□ □□□ □ □□□□ □□ □□ □□ □□□□ □□□□□.

Option	Description
Taxation Policy	Determines whether product and service prices are treated as gross or net prices for the site. This policy is configured at site creation and can only be changed by Commerce Cloud Support.

- B. □□ □□□ "□□ □□ □□□"□ true□ □□□ □□ □□ □□□ □□□ □□□□□. C. □□□□□ "□□□" □□□ □□□ □□□ □□□ □□ □□ □□□ □□□□□ □□□□□□. D. □□□ □□ □□□ □□ □□□ □□ □□ □□□ □□□□ □□□□□.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 68

app_custom_my_cartridge□ □□□ □□ □□□□□ dw□calculateTax(basket) □□□ □□□□ app_storefront_base□ □□□ calculateTex □□ □□□ □□□□ □□ □□□□ □□ □□□ □□□□. □□□□ □ □□□ □□□ □□□ □ □□□□? A)

```
Use  dw.system.HookMgr.callHook('dw.order.calculateTax', 'calculateTax', {basket:currentBasket});
```

B)

```
Add the location of the dw.order.calculateTax hook to  hooks.json, and then use dw.system.HookMgr.callHook('dw.order.calculateTax', 'calculateTax', {basket:currentBasket});
```

C)

```
Add the location of the dw.order.calculateTax hook to  age.json, and then use dw.system.HookMgr.callHook('dw.order.calculateTax', 'calculateTax', {basket:currentBasket});
```

- A. □□ B B. □□ A

C. ☐ ☐ C

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 69

□□ □□□ □□ □□ □□□ □□ □□□□□ □□□□□.

* □□□ □□□ □□□□ □□

* □□ □□ □□ □

* □□ □□□ □□□ □□: Slots/product/product_1x2 isml

* □□□□ □□□ □ □□□

□□□ □□□ □□□ □□□□ □□□ □□□ □□□□□.

```
<isif condition="$(!empty(slotcontent))">
  <isloop iterator="$S{slotcontent.content}"
    alias="product">
    <div class="product">
      <isprint value="$S{product.getID()}"><br />
      <isprint value="$S{product.getName()}"><br />
    </div>
  </isloop>
</isif>
```

□□□ □□□ □□ □□□□□ □□ □□□ □□□□□?

A. ☐ - □□□ □□□□□ □□□□ □□ □□□□ □□□□ □□□.

B. ☐ □□□ - □□□ □□□ □□□□ □□□□□□.

C. ☐ - □□□ □□ □□□ □□□□□ □□□ □□□□ □□□□ isloop□ □□□□ □□□.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 70

□□□□□□ □□□ □□□□□ □ □□ B2CCommerce □□□□ □□□ □□□□. □□□ □□ □□□□□ □□ □□□ □□ □□□□□

□. □□□ □□□ □□□ □□ □□□ □□ □□ □□ □□□□ □□ □□□□□.

□□ □□ □□□□□ A□□, □□□□□ B□□□ □□ □□□□, □□□□□ C□□, □□□□□ D□□□ □□ □□□□□□ □□ □□□ □.

□□□□ □□□□ □□□ □□□ □□ □□ □□ □□ □□□□ □□□ □□ □□□ □□□□ □□□?

A. □□□ □□□ □□ □□□ □□□□ □ □□ □□□ □□ □□□ □□□□□.

B. Sitepreference □□□ □□ □□□ □□ □□ □ □□□ □□□ □□ □□ □□

C. □□□□ □□□ □□ □□□ □□ □□□ □□ □□□ □□□□□.

D. SitePreference □□□ □□ □□□ Localizable □□□ □□ □□ □□□ □□□□□.

Answer: C ([LEAVE A REPLY](#))

On this page you can manage details of your attribute definition. Different options are available depending on the value type of your attribute. C

Select Language:

ID:

☒ Display Name:

☒ Help Text:

Value Type

☒ Localizable/Site-Specific:

A. □□□□□ □□ □□□□ □□ □□□□ □□□□

B. □□□□ □□□□□□ □□□ □□ □□

C. □□□□ □□ □□□ □□□□ □□□ □□□□□.

A. □□ □□□ □□ □□□ □□□ □□□ □□ □□ □□□ □□□□□.

B. □□□ □□□ □□ □□□ □□□ □□ □□ □□ □□□□□.

C. □□ □□ □□ □□ □□□ □□□□□.

D. □□ □□ □□ □□□□ □□ □□ □□□ □□ □□□ □□□ □□ □□□ □□□□□.

A. ☐☐☐ ☐☐☐☐ ☐☐☐☐ ☐☐☐☐☐.

B. ☐☐☐ ☐☐☐☐ ☐☐☐☐ ☐☐☐☐.

C. ☐☐ ☐☐☐ ☐☐☐ ☐ ☐☐☐☐ ☐☐☐☐☐ ☐☐☐☐.

D. `prod.custom.sellable`.

Answer: (SHOW ANSWER)

NEW QUESTION: 74

Which of the following is the correct way to create a `prod` object?

"prod" is a class that has a `custom` property that is a `sellable` object.

A. `prod.custom.sellable`

B. `prod.persistable.sellable`

C. `prod.extended.sellable`

D. `prod`

Answer: A (LEAVE A REPLY)

NEW QUESTION: 75

Which of the following is the correct way to create a `category1` object?

Business Manager has a `WARN` log level that is a `category1` object. The `category1` object has a `logger` property that is a `loggerFile` object.

Which of the following is the correct way to create a `loggerFile` object?

```
var logger = Logger.getLogger("loggerFile", "category1.eu");
logger.warn("This is a log message");
```

Which of the following is the correct way to create a `loggerFile` object?

A. `loggerFile`

B. `loggerFile` is a `loggerFile` object that is a `loggerFile` object.

C. `custom-loggerFile` is a `loggerFile` object that is a `loggerFile` object.

D. `customwarn` is a `loggerFile` object that is a `loggerFile` object.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 76

Which of the following is the correct way to create a `login` object?

```
dw.system.Logger.getLogger('login').debug("Login API has succeeded");
```

Which of the following is the correct way to create a `login` object?

Which of the following is the correct way to create a `login` object? (The `login` object is a `login` object.)

A. `login` is a `login` object that is a `login` object.

B. `login` is a `login` object that is a `login` object.

C. `login` is a `login` object that is a `login` object.

D. `login` is a `login` object that is a `login` object.

Answer: A,C (LEAVE A REPLY)

B2C-Commerce-Developer □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ B2C-Commerce-Developer □□! DumpTop
□ □□ **B2C-Commerce-Developer** □□ □□□ □□□□□□, DumpTop B2C-Commerce-Developer □□ □□□ □□□□□□□□
□□□ □□□□□□□. □□□□ □□□ □□□□ □□ DumpTop B2C-Commerce-Developer □□□ □□□□□.

<https://www.dumptop.com/Salesforce/B2C-Commerce-Developer-dump.html> (208 Q&As Dumps, **30%OFF** Special Discount:
KrDump)

NEW QUESTION: 77

□□□□ □□ □□□□□□□ □□□□ □□ □□(□: □□ □□ □)□ □□□□ B2C Commerce Staging □□□□□□ □□ □□□ □□
□□ □□ □□□□□ □□□.

□ □□□□□□ □□□□ □ □□□ □□ □ □□□ □□□□ □□□□ □□ □□□ □□□ □□□□□?

- A. Stores Data OCAPI□ □□ POST □□□□□.
- B. Stores Data OCAPI□ □□ PUT □□□□□.
- C. Stores Data OCAPI□ □□ PATCH □□□□□.
- D. Stores Data OCAPI□ □□ □□□□ □□□□□.

Answer: ([SHOW ANSWER](#))

Siempre que sea un objeto standard sera put en vez de post

NEW QUESTION: 78

□□□□ □□□□ □□ □□□ □□□ □□ □□□ □□□ □□□□ □□ □□□ □□□□□ □□□. □□ □□□ □□ ID□ □□ □□□□□
□.


□□□ □□□ □□□□ □□ □□□ □□□□□?

- A. \$http('□□□ □□□', 'cid', '□□')\$
- B. \$include('□□□ □□', 'cid', '□□')\$
- C. \$url('□□□ □□', 'cid', '□□')\$
- D. \$httpUrl('□□□ □□', 'cid', '□□')\$

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 79

String □□□ email□□□ □ □□□ □□ □□□□ □□□ □□ NewsletterSubscription □□□ □□ □□□ □□□□.

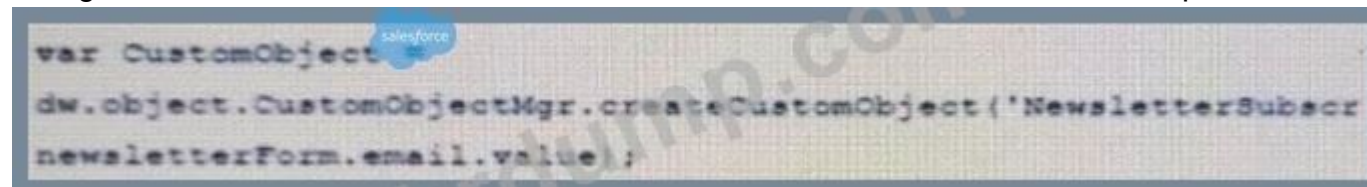

```
var CustomObjectManager = dw.object.CustomObjectMgr.createCustomObject('NewsletterSubscription', newsletterForm.email.value);
```

- NewsletterSubscription □□□ □□ □□□ □□□□ □□□□.
- □□□ □□□□□?
- A. □□□ □□□ try/catch □□□□ □□□□ □□□.
- B. □□□ □□□ □□□□□□ □□□□ □□□.
- C. □□□ □□□ □□□ □□□□□. □□□ □□□ □□□ □□□□.

```
var CustomObject =  
dw.object.CustomObjectMgr.createCustomObject('News  
'email' newsletterForm.email.value);
```

Answer: (SHOW ANSWER)

NEW QUESTION: 80

□□□□ □□□□ □□ □□ □□ □□ □□□□ □□□□ □□ □□□ □□□□□□. □□□□ □□□□□ B2C Commerce □□ □□ □□ □□ □□□□□ □□□□□□□ □□□□□□.

□□□□□□ □ □□□ □□□ □ □□ □□□ □□□□□□?

- A.** □□ □□□ □□□ □□□□□ □□ □□ □□□ □□□□□.
- B.** □□ □□ □□□□ □□□□ □□ □□□ □□□□□.
- C.** □□□□ □□ □ □□ □□□□ □□□□ □□ □□□ □□□□□.
- D.** □□ □□□ □□ □□ □□□□□ □□ □□ □□□□ □□□□□.

Answer: D (LEAVE A REPLY)

□ □ :

NEW QUESTION: 81

□□□□ □□ □□□□□□□□ □□□□ □□ □□(□: □□ □□ □)□ □□□□ B2C Commerce Staging □□□□□□ □□ □□□ □□
□□ □□ □□□□□ □□□.

□ □□□□□□□ □□□□□ □ □□□□ □□ □ □□□□ □□□□□ □□□□□ □□ □□□□ □□□ □□□□□□?

- A.** Stores Data OCAP1□ □□ PUT □□□□□.
- B.** Stores Data OCAP1□ □□ □□□□ □□□□□.
- Siempre que sea un objeto standard sera put en vez
- C.** Stores Data OCAP1□ □□ POST □□□□□.
- D.** Stores Data OCAP1□ □□ PATCH □□□□□.

Siempre que sea un objeto standard sera put en vez de post

Answer: A (LEAVE A REPLY)

NEW QUESTION: 82

□□□□ □□□ □□□□ □□□□ JSON □□□□ □□□□ □□□. □□□ □□□ □□□□□?

- A.** `JSON.stringify(PageMgr.renderpage(pageID), {parameter1:value1});`
B. `PageMgr.serializePage(pageID), {parameter1:value1});`
C. `PageMgr.renderPage{pageID, {□□□□1: □1}}`

Answer: B (LEAVE A REPLY)

NEW QUESTION: 83

```

app_project
MyBusinessController.js
client_project
MyBusinessController.js
client_project
storefront_core
storefront_controllers

```

- A.** client project:app project:storefront controllers:storefront core

- B.** app_project:storefront_controllers:storefront_core
C. app_project:client_project:storefront_controllers:storefront_core
D. storefront_core:storefront_controllers:client_project:app_project

Answer: C (LEAVE A REPLY)

NEW QUESTION: 84

```
Server.get('Show', consentTracking.consent, cache.applyDefaultCache, function (req,res,next){ Var Site = require('dw/system/Syte"); Var
pageMetaHelper = require('*/cartridge/scripts /helpers/pageMetaHelper'); pageMetaHelper.setPageMetaTags(req.pageMetaData,
Site.current); res.render('/home/homePage'); □□□ □□ □□
}, pageMetadata.computedPageMetadata);
□□ □□□□ □□ □□ □□□□ □□□□ □□□□.
□□□□ 6□□ □□□□ □□□ □□□□ □□ □□ □□ □□ □□□□ □□□□?
```

- A.** req.next();
B. res;C□ □□□□. res.next();
C. □□();

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 85

☐☐ ☐☐☐ ☐☐ ☐☐☐☐☐☐.

Administration > Sites > Manage Sites > RefArch - General

General Settings Cache Site Status Page Meta Tag Rules

RefArch - General

Fields with a red asterisk (*) are mandatory. Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

ID:

Name*:

Time Zone*:

Default Currency*:

Taxation*:

Customer List*:

Brand:

Billing Entity:

Description:

- □□□ RefArch□□ □□□□□ RefArchGlobal□ □□□ □□ □□□ □□□□□ RefArch□□ □□□□ □□ □□□ □□□□□?
- A.** RefArchGlobal □□ □□□ RefArch □□□□ □□□□□.
- B.** □□ □□ □□□□□□ RefArchGlobal□ □□□□□.
- C.** GlobalPreferences□□ "□□ □□ □□"□ □□□□□□.

D. `var myAccount = "my account";`

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 86

Which of the following is a valid JavaScript variable name?
 A. `my-account`
 B. `my account`
 C. `my_account`
 D. `myaccount`

- A. `my-account`
- B. `my account`
- C. `my_account`
- D. `myaccount`

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 87

Home-Show `var myAccount = "my account";`

```
server.get('Show', consentTracking.consent, cache.applyDefaultCache, function (req, res, next) {  
  // base code here  
});
```

Which of the following is a valid JavaScript variable name?
 A. `my-account`
 B. `my account`
 C. `my_account`
 D. `myaccount`

```
server.append('Show', function (req, res, next) {  
  // custom code here  
});
```

- Which of the following is a valid JavaScript variable name?
 A. `my-account`
 B. `my account`
 C. `my_account`
 D. `myaccount`

Answer: C [\(LEAVE A REPLY\)](#)

NEW QUESTION: 88

Which of the following is a valid JavaScript variable name?
 A. `my-account`
 B. `my account`
 C. `my_account`
 D. `myaccount`

- A. `<a href="${url.get('Account-Show')}>${Resource.message('myaccount')}`
- B. `<a href="${URLUtils.get('Account-Show')}>${Resource.msg('myaccount','account',request.locale())}`
- C. `<a href="${URLUtils.url('Account-Show')}>${Resource.msg('myaccount','account',null)}`
- D. `<a href="${URLUtils ('Account-Show')}>${ResourceMgr.getProperties('myaccount','account',null)}`

Answer: C [\(LEAVE A REPLY\)](#)

NEW QUESTION: 89

□□□□ Storefront □□□□□ □□□ □□ □□□ □□□ □□□□ □□□ □□□ □□□.

□□□ □□ □□ □□ □□□ □□ □□□□ □□□ □□□ □□□ □□□□□ □□□ □□□□ □ □□□ □□□□□□. □□□□ □□□
□ □□□ □□□ □□□□.

* □□□ □□□ □□□□□ □□□ □□ □□□□□ □□□□.

* □□□ □□□□□ □□ □□□ Storefront □□□□ □□ □□□ □□□□□.

□□□□ □□□□ □□ □□□□□ □□□ □ □□ □□□ □□□□□?

A. □□□ □□□□ □ □□□□ □□□ □□□□ □□□ □□□□□ □□□ □□□□□ □□ □□□□□ □□□□□.

[illegible]

C. □□□□ □□□□ □ □□□□ □□□ □□□□ □□ □□□□□ □□ □□□□ □□ □□□ □□ □□□ □□□□□ □□□□□.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 90

SFRA ☐☐☐ ☐☐☐☐☐☐ ☐☐ ☐☐☐☐.

```
server.get('Include', server.middleware.include,
cache.applyDefaultCache,
function (req, res, next) {
    ... assume original code here ...
    next();
}
);
```

☐☐ ☐☐☐ ☐☐☐ ☐☐ ☐☐ ☐☐☐☐☐☐

https://yourinstance/on/demandware.store/Sites-RefArch-Site/en_US/Page-Include?cid=about-us

ISML □□□□□ □ □□□□ □□□ □□□□ □□□ □□□ □□□□□?

A)

```
<a href="${URLUtils.url('Page-Includes', 'cid',  
'about-us')}">${Resource.msg('aboutus', 'content', null)}  
</a>
```

B)

```
<isinclude url="$URLUtils.url('Page-Include',  
'cid', 'about-us'))">
```

C)

```
<iscontent url="${URLUtils.url('Page-Include',  
'cid', 'about-us'))}">
```

A. ☐ ☐ B

B. ☐ ☐ **C**

Answer: A,D (LEAVE A REPLY)

NEW QUESTION: 93

□□□ □□□□ □□□□ □□□ □□□□ HTTPS □□□□□ □□□□ □□□□ □□ □□□ PaymentForm □□□□□ □□□□□□.
HTTPS□ □□□□□ □□□ □□□□ □□□□ □□ □□ □□□ □□□□□?

- A.** `exports.PaymentForm = guard.expose(['post', 'loggedIn'], handlePaymentForm);`
- B.** `exports.PaymentForm = guard.ensure(['https', 'post', 'loggedIn'], handlePaymentForm);`
- C.** `exports.PaymentForm = guard.ensure(['http', 'post', 'loggedIn'], handlePaymentForm);`
- D.** `exports.PaymentForm = guard.httpsPost(handlePaymentForm);`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 94

□□ □□ □□ □□□□ □□ □□□□ □□ □□ □□ □□ □□ ID□ □□□ □ □□□ □□□. □□□ □□□ □□□□. □□□ □□
ID□ □□ □□ □□□□ □□ □□□□ □□□□□ □□□□ □□□□.

```
if (address.ID !== addressForm.addressid.value) {
  for (var i = 0; i < addressBook.addresses.length; i++) {
    if (addressBook.addresses[i].ID === addressForm.addressid.value) {
      addressForm.invalidateFormElement();
      throw new Error('Address name already exists');
    }
  }
}
```

□□□ □□□□ □□ ID □□ □□□ □□ □□□□ □□□□□ □ □□□ □□□ □□□□ □□□□ □□□?

- A.** `addressForm.addresssid.invalidateFormElement = ☐;`
- B.** `addressForm.invalidateFormElement("addressid");`
- C.** `addressForm.addresssid.invalidateFormElement();`
- D.** `addressForm.invalidateFormElement(addressForm.addressid);`

Answer: C (LEAVE A REPLY)

NEW QUESTION: 95

[illegible]

```
var Logger = require('dw/system/Logger');

var urlEmail = 'https://api.weibo.com/2/account/profile/email.json' + accessTokenSuffix;

http.open('GET', urlEmail);
http.send();

var resultEmail = http.getText();

if (200 !== http.statusCode) {
    // Log status code
}
```

HTTP □□ □□□ □□□ □□ □□□ □□ □□ □□□ □□□□ □□□□ □□□□□?

- A.** `Logger.getLogger('profile').debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);`
- B.** `Logger.getLogger().debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);`
- C.** `logger.debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);`

D. logger.getLogger('profile').debug("□□□ □□□ □□ □□, □□ □□: ", http.statusCode);

Answer: C (LEAVE A REPLY)

NEW QUESTION: 96

□□□ □□□□ Service Framework□ □□□□ □□ □ □□□ □□□ □□□□ □□□□ □□□ □□ □□□ □□□□□. Universal Containers□ □□□□ □□ □□ □ □□ □□□ □□□ □ □□□ □□□.

□□□□ □□ □□□ □□□□ □□ □□ □□ □□□ □□□□ □□□?

- A. □□□ □□□□ □□ □□ setTimeout □□□□ □□□□ □□ □□□ □□□□□.
- B. □□□ □□ □□□ □□□□ true□ □□ □□ □□□ □□□□ □□□ □□□□□.
- C. ServiceUnavailableException □□ □□□□ □□□□ □□ □□□ □□□□□.
- D. □□ □□ □□□ □□□□ □□ □□□ □□□□ □□ IOException □□□□ □□□□ □□□ □□ □□□ □□□□.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 97

□□□ □□□□ □□□□□ □□ □□ □□ □□□□□.

```
dw.system.Logger.getLogger('login').debug("Login API has succeeded");
```

- □□ □□ □□□□□. □□□ □□□□ □□ □□□□ □□ □□□□ □□□□ □□ □□□□.
- □□□□ □□□□ □□□ □□ □□□ □□□□ □□□? (□ □□□ □□□□□.)
- A. □□ □□ □□ □□□□ □□□ □□□ □□□ □□ □□ □□ □□□ □□□ □□ □□□ □□□□□□ □□□□□.
 - B. □□ □□ □□□□ □□□ □□□ □□□ □□ □□ □□□ "□□□" □□□□□ □□□□□□ □□□□□□.
 - C. □□□ □□ □□□ □□□ □□ □□ □□ □□□□ □□□ □□□ □□□ □□ □□□ □□□□□ □□□ □□□□□□.
 - D. □□ □□□□□ □□□ □□□ □□ □□□ □□ □□□ □□□□□.

Answer: A,D (LEAVE A REPLY)

NEW QUESTION: 98

□□□ □□□□ □□ □□□ □□ □□ □□□ □□□□ □□□□. □□ OCAPI(Open Commerce API) □□□ □□□□ □□□□ □□□ □.

```
POST /dw/shop/v18_3/products/(creative-zen-v,namco-we-ski-wii)?client_id=aaaa...
HTTP/1.1 Host: example.com
```

- □□□ □□□ □□□□ □□□?
- A. URI□ /dw/shop/v18_3/products/creative-zen-v□ □□□□□.
 - B. HTTP □□□□ PUT□□ □□□□□.
 - C. HTTP □□□ GET□□ □□□□□.
 - D. □□□ □□ □□□ □□□□□.

Answer: (SHOW ANSWER)

□□

NEW QUESTION: 99

□□□□ Storefront □□□□□ □□□ □□ □□□ □□□ □□□□ □□□ □□□ □□□. □□□□ □□ □□ □□ □□□ □□ □□□□ □□□ □□□ □□□□□ □□□ □□□□ □ □□□ □□□□□□. □□□□ □□□□ □□□ □□□ □□□□.

* □□□ □□□ □□□□□ □□□ □□ □□□□□ □□□□.

* □□□ □□□□□ □□ □□□ Storefront □□□□ □□ □□□ □□□□□.

□□□□ □□□□ □□ □□□□□ □□□ □ □□ □□□ □□□□□?

A. □□□ □□□□ □ □□□□ □□□ □□□□ □□□ □□□□ □□□ □□□□□ □□□ □□ □□□ □□□□□.

B. □□□ □□□□ □ □□□□ □□□ □□□□ □□□ □□□□□ □□□ □□□□□ □□ □□□□□ □□□□□.

C. □□□□ □□□□ □ □□□□ □□□ □□□□ □□ □□□□□ □□ □□□□ □□ □□□ □□ □□□ □□□□□ □□□□□.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 100

□□□□ □ □□ □□ □□ □□ □□□□ □□□ □□□□ □□□ □□ □□□ □□□□.

□□□□ □□□ □□□□□ □□□ □ □□□ □□□□ □□□□ □□□□ □□ □□ □□□□ □□□□□?

A)

```
<isbanner id="category-banner" description="Categories Banner" context="category" context-object="{pdict.ProductSearchResult.category}" />
```

B)

```
<leaslot id="category-banner" description="Categories Banner" context="category" context-object="{pdict.ProductSearchResult.category}" />
```

C)

```
<iscontent context="global" description="Categories Banner" id="category-banner" context-object="{pdict.ProductSearchResult.category}" />
```

- A. □□ A
- B. □□ C
- C. □□ B

Answer: (SHOW ANSWER)

NEW QUESTION: 101

□□ □□□ □□ □□□□ □□□□□.

```
var log = Logger.getLogger("xyz", "export");
log.info("This is important information");
```

Business Manager□ □□□ □□□ □□□□.

□□ □□ □□□ □□ □□□ "□□"□ "□□"□□□.

□ □□□ □□□□ □□□ □□□ □□ □□□ □□ □□□ □□□□□?

A. □□□-xyz

B. custominfo-□□□□

C. □□□

D. □□ □□□□

Answer: A (LEAVE A REPLY)

NEW QUESTION: 102

[illegible]

- A.** $\frac{1}{2} > \frac{1}{3}$ because $\frac{1}{2}$ is greater than $\frac{1}{3}$.
- B.** $\frac{1}{2} > \frac{1}{3}$ because $\frac{1}{2}$ is less than $\frac{1}{3}$.
- C.** $\frac{1}{2} > \frac{1}{3}$ because $\frac{1}{2}$ is the same as $\frac{1}{3}$.
- D.** $\frac{1}{2} > \frac{1}{3}$ because $\frac{1}{2}$ is greater than $\frac{1}{3}$ in UX Studio.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 103

□□□ □□□□ □□□□□ □□□ □□□□ □□ Open Commerce API □□□ □□□□ □□□□. □□ □□□ □□□ □□□□□.

```
{
  "resource_id":"/baskets/**",
  "methods":["get"],
  "read_attributes": "(**)",
  "write_attributes": "(**)"
}
```

- □□□□ □□□ □□□□□ □□□ □ □□□□?
- A.** "write_attributes" □□ " (+items) "□ □□□□□.
 - B.** "methods" □□ ["get", "post"]□ □□□□□.
 - C.** "read_attributes" □□ " (items) "□ □□□□□.
 - D.** "resource id" □□ "/baskets/*/items"□ □□□□□.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 104

[illegible]

- A.** □□□ □□□□ □□□□ □□ □□□□ □□□ □□ □□□ □□□□□□ □□ □□□ □□ □□□□ □□□□□.
- B.** □□□ □□□ □□ □□□ □□□□ □□ □□ □□□ □□□□ □□□ □□□ □□ □□□ □□□□□.
- C.** □□□ □□□□ □□□□ □□ □□□□ □□□ □□ □□□ □□ □□□ □□□□□.
- D.** □□□ □□□□ □□□□ □□ □□□□ □□□ □□ □□□ □□□ □□ □□□ □□ □□□ □□□□□.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 105

[illegible]

```

var Logger = require('dw/system/Logger');

var urlEmail = 'https://api.weibo.com/2/account/profile/email.json' + accessTokenSuffix;

http.open('GET', urlEmail);
http.send();

var resultEmail = http.getText();

if (200 !== http.statusCode) {
    // Log Invalid Status Code
}

```

HTTP □□ □□□ □□□ □□ □□□ □□ □□ □□□ □□□□ □□□□□□?

- A. Logger.getLogger().debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);
- B. logger.debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);
- C. logger.getLogger('profile').debug("□□□ □□□ □□ □□, □□ □□: ", http.statusCode);
- D. Logger.getLogger('profile').debug("□□□ □□□ □□ □□, □□ □□: {0}□(□) □□□□□□□.", http.statusCode);

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 106

□□□ □□□□ app_project□□ □□□□□ MyBusinessController.js□□ □□□ □□□□□□.
 □□□□ □□□□ client_project□□ MyBusinessController.js□ □□□□□ □□ □ □ □□□ □□□□□. client_projectcartridge□□ □
 □□ □□ □□□ □□□□ □□□□. □□ □□□ storefront_core □ storefront_controllerscartridges□ □□□□ □□□□.
 □□ □□□□ □□□ □□□□ □□ □□□ □□□□□?

- A. client_project:app_project:storefront_controllers:storefront_core
- B. app_project:storefront_controllers:storefront_core
- C. app_project:client_project:storefront_controllers:storefront_core
- D. storefront_core:storefront_controllers:client_project:app_project

Answer: C ([LEAVE A REPLY](#))

□□/□□:

B2C-Commerce-Developer □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ B2C-Commerce-Developer □□! DumpTop
 □ □□ **B2C-Commerce-Developer** □□ □□□ □□□□□□, DumpTop B2C-Commerce-Developer □□ □□□ □□□□□□□□
 □□□ □□□□□□□. □□□□ □□□ □□□□ □□ DumpTop B2C-Commerce-Developer □□□ □□□□□.

<https://www.dumptop.com/Salesforce/B2C-Commerce-Developer-dump.html> (208 Q&As Dumps, **30%OFF** Special Discount: **KrDump**)

NEW QUESTION: 107

□□□□ DEBUG□ □ □ □□□ □□□□.
 □□□□ □□ □□ □□□□ myLogCategory□ □□ DEBUG □□ □□□□ □ □ □□□ □□□□. □ □□□□ □□□ □□ □□ □□□
 □□□ □ □□ □□□□ □□ □□□□ □□□ □□ □□□?

NEW QUESTION: 111

□□ □□□ □□ □□□□ □□□□□.

```
var log = Logger.getLogger("xyz", "export");  
log.info("This is important information");
```

Business Manager□ □□□ □□□ □□□□.

* □□ □□ □□□ □□ □□□ "□□"□ "□□"□□□.

□ □□□ □□□□ □□□ □□□ □□ □□□ □□ □□□ □□□□□?

A. □□□-xyz

B. xyz

C. custominfo-□□□□

D. □□ □□□□

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 112

□□□ □□ □□ □□□ □□ B2C Commerce □□□□□□ □□□□□.

* □□ □□ □ □□□□ □□: US □ IN

* □□□ □□

□□□□ □□□ □□□□ □□□ □□ IN □□ □□□ □ □□□ □□□□ □□□ □□ □□□ □□□□.

□ □□ □□□ □□□□□ □□ □□□ □□□□ □□□?

A. □□□□/□□/en_IN/profile.xml

B. □□□□/□□/profile_en_IN.xml

C. □□□□/□□/in/profile.xml

D. □□□□/□□/profile_in.xml

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 113

□□□ newsletter.xml □□□ □□ □□ □□□□□□.

```
<?xml version="1.0"?>  
<form xmlns="http://www.demandware.com/xml/form/2008-04-19">  
  <field formid="email" lable="Email:" type="string" mandatory="true" max-length="50" />  
</form>
```

□□ □□□□ □□□□ □□ JSON □□□ □□□□ □□ □□ □□□□□?

A. server.forms.getForm('□□□□')

B. server.form.getForm('□□□□')

C. server.forms.getForm('dwfrm_newsletter')

D. server.form.getForm('dwfrm_newsletter')

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 114

□□□□ Storefront□□ American Express □□ □□□ □□□□ □□ □□□ □□ □□□ □□□□. □□ □□ □□ □□□ □□ □□□□ □.

□□ □□□□ □□ □□□□ Business Manager□□ □□ □□□ □□□□ □□□?

A. □□□ □□ □□□□ American Express□ □□ □□ □□□□ □□□□□□.

B. □□□ □□ □□□ □□ □□□ American Express□ □□□□□.

C. □□ □□□□ American Express□ □□ □□ □□□□ □□□□□□.

D. □□ □□□□□□ American Express□ □□ □□□□ □□□□□.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 115

□□□ □□□□ □□□□□ □□□ □□□□ □□ Open Commerce API □□□ □□□□ □□□□. □□ □□□ □□□ □□□□□.

```
{
  "resource_id": "/baskets/**",
  "methods": ["get"],
  "read_attributes": "(*)",
  "write_attributes": "(*)"
}
```

□□ □□□□ □□□ □□□□□ □□□ □ □□□□□?

A. "read_attributes" □□ "(□□)"□□ □□□□□.

B. "resource_id" □□ "/baskets/*/items"□ □□□□□.

C. "methods" □□ ["get", "post"]□ □□□□□.

D. "write_attributes" □□ "(+□)"□□ □□□□□.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 116

□3□ □□ □□ □□□□ MySampte.com □□ □□□ □□ □□□ □□□□□ □□□□□ □ □□□ □□ □□□□ □□ □□□ □□□

□. □□□□ OCAPI(Open Commerce API)□ □□□□ □ □□□ □□ □□ □□□ □ □□□ □□□□□□. □□□□ □□□□□□

OCAPI □□□ □□□□□ □□□. □□□□ □□□□□ ID□ "aaaaaaaaaaaaaaaaaaaaaaaaaaaaa'"□□ □□□□□. □□ □□ □□□

GCAPI □□□ □□□□□?

A)

Updating the Cartridge Path

If you are using controllers, you must upload the app_storefront_controller cartridge, but you don't need to add it to the cartridge path.

1. In **Business Manager**, select **Administration > Sites > Manage Sites**.
2. Select **SiteGenesis** or your **site** and click the **Settings** tab.
3. Add the Commerce Cloud Endless Aisle cartridges to the list of cartridges:
 - a. If you are using Endless Aisle pipelines add the following to the beginning of your path: int_ocapi_ext_core:int_ocapi_ext_pipelines:
 - b. If you are using Endless Aisle controllers add the following to the beginning of your path: int_ocapi_ext_edge:int_ocapi_ext_controllers:
 - c. If you are using the **SiteGenesis** with Salesforce B2C Commerce storefront cartridge add the following to your path: ea_sitegenesis_storefront_richUI:ea_sitegenesis_storefront:
4. Add the Verifone cartridges to the list of cartridges if using Verifone devices:
 - a. If you are using Endless Aisle pipelines and Verifone devices add the following to the beginning of your path: int_verifone_dss_core:int_verifone_dss_pipelines:
 - b. If you are using Endless Aisle controllers and Verifone devices add the following to the beginning of your path: int_verifone_dss_core:int_verifone_dss_controllers:
5. Click **Apply**.
6. Add bm_instore to the **Business Manager** cartridge path:
 - a. Click the **Business Manager** link below the site name.
 - b. Add :bm_instore to the end of the cartridge path.
 - c. If you plan to use Endless Aisle Sales Reports in Business Manager, add int_ocapi_ext_pipelines:int_ocapi_ext_core: to the cartridge path.

NEW QUESTION: 119

□□ □□□ □□ □□□□ □□□□□.

```
var log = Logger.getLogger("xyz", "export");
log.info("This is important information");
```

BusinessManager□ □□□ □□□ □□□□.

* □□ □□ □□□ □□ □□□ "□□"□ "□□"□□□.

□ □□□ □□□□ □□□ □□□ □□ □□□ □□□□□?

A. □□ □□□□

B. custominfo-□□□□

C. □□□-xyz

D. xyz

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 120

Home-Show □□□ □□ □□□□ □□□ □□□□□.

```
server.get('Show', consentTracking.consent, cache.applyDefaultCache, function (req, res, next) {
```

```
// □□□ □□ □□
```

```
});
```

□□□□ □□ □□□ □□□□ □□ □□□□ □□□ □□ □□□□ □□ □□ □□ □□□□□ Home.js□ □□□□□ □□□□ □□□□ □□□□.

```
server.append('□□', function (req, res, next) {
```

```
// □□□ □□ □□
```

});

□□□ □ □□ □□□□ □□□□□ □□□ □ □□□□ □□□ □□□□□?

A. □□□ □□□ □□□□□. "□□: □□□□□ □□□ □□□□ □□□□."

B. □□□ □□ □□□ □□□ □□ □□ □□□ □□□□□.

C. □□ □□□ □□□□□ □□ □□ □□□□ □□ □□□ □□□ □□ □□□ □□□□□.

D. □□ □□□ □□□ □□ □□□ □□ □□□ □□□□□.

Answer: (SHOW ANSWER)

NEW QUESTION: 121

□□□□ storefront-catalog-m-en□ □ Storefront □□□ □□□□□ Storefront □□□□ □ □ □□□ □□□□ □□□□.

□ □□ □□□ □□□ □□□□□? (□ □□□ □□□□□.)

A. □□□□□ □□ □□□ □□□ □□□□.

B. □□□□□ □□□□ □□

C. □□□□□ □□□□□□□.

D. Storefront □□□□□ □□□□ □□□□□.

Answer: A,C (LEAVE A REPLY)

□□/□□: [https://documentation.b2c.commercecloud.salesforce.com/DOC3/index.jsp?topic=%](https://documentation.b2c.commercecloud.salesforce.com/DOC3/index.jsp?topic=%2Fcom.demandware.dochelp%2FLegacyDevDoc%2FCategoriesdonotshowinstorefront.html)

[2Fcom.demandware.dochelp%2FLegacyDevDoc%2FCategoriesdonotshowinstorefront.html](https://documentation.b2c.commercecloud.salesforce.com/DOC3/index.jsp?topic=%2Fcom.demandware.dochelp%2FLegacyDevDoc%2FCategoriesdonotshowinstorefront.html)

B2C-Commerce-Developer □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ B2C-Commerce-Developer □□! DumpTop
□ □□ **B2C-Commerce-Developer** □□ □□□ □□□□□□, DumpTop B2C-Commerce-Developer □□ □□□ □□□□□□□□
□□□ □□□□□□□. □□□□ □□□ □□□□ □□ DumpTop B2C-Commerce-Developer □□□ □□□□□.

<https://www.dumptop.com/Salesforce/B2C-Commerce-Developer-dump.html> (208 Q&As Dumps, **30%OFF** Special Discount:

KrDump)

NEW QUESTION: 122

□□□ □□□□□□ □□□ □□□□□ □□□ □□□ □□ □□□□□ □□ □□□ □□□□ □□□□. □□□ □□□□ □□□
□□□□□ □□ □□□ □□□ □□□□□ □□□ □□□□□.

□□□□ □□□□ □□□□ □□□ □□□□ □□□ □□□□□ □□□ □□□ □□□□ □□□□ □□□□ □□□ □□ □ □□ □□□
□□□□□?

A. □□□□ □□□□ □□□ □□□□ □□□ □□□□□ □□□□□.

B. □□□□ □□□□ □□□ □□□□ □□□ □□□□□ □□□□ □□ □□□ □□□□ □□ □□ □□□ □□□□□.

C. □□□ □□□□ □ □□□□ □□□ □□□□ □□□ □□□□□ □□□ □□□□□ □□ □□□□□ □□□□□.

D. □□□ □□□□ □ □□□□ □□□ □□□□ □□□ □□□□□ □□□□ □□□ □□□□ □□□□ □□□□□ □□ □□□ □□□
□□.

Answer: B (LEAVE A REPLY)

□□/□□: [https://documentation.b2c.commercecloud.salesforce.com/DOC2/index.jsp?topic=%](https://documentation.b2c.commercecloud.salesforce.com/DOC2/index.jsp?topic=%2Fcom.demandware.dochelp%2FImportExport%2FCatalogObjectImportExport.html)

[2Fcom.demandware.dochelp%2FImportExport%2FCatalogObjectImportExport.html](https://documentation.b2c.commercecloud.salesforce.com/DOC2/index.jsp?topic=%2Fcom.demandware.dochelp%2FImportExport%2FCatalogObjectImportExport.html)

NEW QUESTION: 123

□□ □□□ □□ □□□□ □□ □□□□ □□ □□ □□ □□ ID□ □□□ □ □□□ □□□. □□□ □□□ □□□□. □□□ □□ ID□ □□ □□ □□□□ □□ □□□□ □□□□□ □□□□ □□□□.

```
if (address.ID !== addressForm.addressid.value) {  
  for (var i = 0; i < addressBook.addresses.length; i++) {  
    if (addressBook.addresses[i].ID === addressForm.addressid.value) {  
      addressForm.invalidateFormElement();  
      throw new Error('Address name already exists');  
    }  
  }  
}
```

□□□ □□□□ □□ ID □□ □□□ □□ □□□□ □□□□□ □ □□□ □□□ □□□□ □□□?

- A. addressForm.addresssid.invalidateFormElement = □;
- B. addressForm.invalidateFormElement(addressForm.addressid);
- C. addressForm.invalidateFormElement("addressid");
- D. addressForm.addresssid.invalidateFormElement();

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 124

□□□ □□□□ Open Commerce API□ □□□□ □□ □□□□ □□□□ □□ □□□□□ □□□□ □□□. □□ URL□ □□ □□□ □□□□.

```
http://sitegenesis.demandware.net/dw/data/v18_3/inventory_lists/  
ecom-inventory/product_inventory_records/00883408601
```

□□□ □□□□ □□□□□ resource_id □□ □□□□□?

- A. /inventory_lists/*
- B. /inventory_lists/**
- C. /inventory_list_search
- D. /□□/*

Answer: D ([LEAVE A REPLY](#))

□□:

NEW QUESTION: 125

□□□ □□ □□□□ customLandingPage □□□□ □□□□□ ISML □□□ □□□ □□□□□?



- A. ISML.renderTamplate('cartridge/templates/default/content/custom/customLandingPage');

- B. ISML('□□□/□□/customLandingPage');
- C. ISML.render('content/custom/customLandingPage');
- D. ISML.renderTemplate('content/custom/customLandingPage');

Answer: D ([LEAVE A REPLY](#))

□□/□□: https://documentation.b2c.commercecloud.salesforce.com/DOC4/index.jsp?topic=%2Fcom.demandware.dochelp%2FDWAPI%2Fscriptapi%2Fhtml%2Fapi%2Fclass_dw_template_ISML.html

NEW QUESTION: 126

□□□ □□ □□□ □□□□ □□□ □□□□ Apple Pay□ □□□□□□ □□□.
□ □□ □□□ □□□□ □□ □□ □□□□ □□□ □□□ □□□□□?

- A. □□□ □□
- B. □□ □□□
- C. □□ □□
- D. □□□□

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 127

□□□□□□□□ □□□□ □□□ □□ □□□ □ □□□□ □□ □□ □□□ □□ □□□□ □□□ □ □□□□ □□□ □ □□ □□□□
□ □□ □□□ □□ □□ □□□.
□□□□ □□□□ □□ □ □□ □ □□ □□□□ □□□□□?
□□ 2□ □□□□□.

- A. □ □□ □□ □□□ □□□ □□□□ □□□□□□□□.
- B. □□ □□□□ □□ □□□ try/catch □□□□ □□□□ □□□ □□□□□.
- C. □ □□□ □□ □□ □□□
- D. □□□□ throwOnError □□□ true□ □□□□ □□□ □□□□□.

Answer: ([SHOW ANSWER](#))

setThrowOnError

setThrowOnError() : Service

Forces a Service to throw an error when there is a problem instead of returning a Result with non-OK status.

Returns:

 this Service.



NEW QUESTION: 128

□□□ □□□□ □□ □□□ □□ "□□" □□ □□ □□□ □□□□□□ □□□ □□□ □□ □□□ □□□□.
□ □□ □□□ □□□□□ □□□□ Business Manager□□ □□□ □□□□ □□□?

- A. □□□ □□ > □□□ □□ □□ > □□ □□ □□ □□□ □□ □□ □□ □□.
- B. CreditCardType.json □□ □□□ □□ □□ □□ □□.
- C. □□□ □□ > □□ > □□ □□ □□□ □□ □□.
- D. □□□ □□ > □□□ □□ □□ > □□ □□ □□ □□□ □□ □□ □□.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 129

□□ □□ □□□ □□□ □□□□ □□□□. □□□ □□□□ □□□ □□□□□ □□ □□□ □□□ □□□□ □□□.

```
var paymentInstruments = order.getPaymentInstruments(PaymentInstrument.METHOD_DW_APPLE_PAY).toArray();  
  
if (!paymentInstruments.length) {  
    // Log Error Message  
    return null;  
}  
  
var paymentInstrument = paymentInstruments[0];  
var paymentTransaction = paymentInstrument.getPaymentTransaction();
```

□□ □ □□ □□□ □□□□ □□ □□□□□?

- A. `Logger.getLog().log('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);`
- B. `Logger.exception('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);`
- C. `Logger.error('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);`
- D. `Logger.fault('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 130

Universal Containers □ □□□ □□ □□ □□□ "The Basics"□□ □□□ □□□ □□ ID□ □□□□□.

□□ 103 □□□□ 1□

□□ 611 □□□□ 5□

□□ □□ 201 □□□□

□□□□ □□□□□□ □ □ □□ □□□ □□□□□□.

□□□□ "□□"□ □□□□ □□ □□□□ □□□□ □□ □□□ □□□□□?

- A. □□ □□ □□□□ "The Basics"□□ □□□ □□□□□.
- B. □□ □□□□ "The Basics"□□ □□□ □□□ □□ □□ □□ □□□□□.
- C. □□ □□□□ "The Basics"□□ □□□ □□□ □□ □□ □□ □□□□□.
- D. □□ □□ □□□□ "The Basics"□□ □□ □□□ □□□□.

Answer: ([SHOW ANSWER](#))

□□:

NEW QUESTION: 131

□□□ □□□□ □□ □□ □□ □ □□□□□ □□□□ □□ □□□ □□ □□ □□ □□□□□ □□ □□□□ □□□ □□□□□□ □□
□ □□□□.

□□□□ □□ □□ □□□□□ □□ □□ □□□□ □□□?

- A. □□ □□
- B. `$.ajax( )` jQuery □□□
- C. □□() □□
- D. □□□ □□□□() □□

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 132

□□□□ □□□□□ □□□ □□ > □□□□ \$ □□□□ □□□ □□□□ □□□□ □□□ □ □□ □□ □□□ □□□□□?

A. □□□ □ □□ □□ □□

B. □□□ □□

C. □□

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 133

□□ □□□ □□ □□□□ □□ □□□□ □□ □□ □□ □□ □□ ID□ □□□ □ □□□ □□□. □□□ □□□ □□□□. □□□ □□
ID□ □□ □□ □□□□ □□ □□□□ □□□□□ □□□□ □□□□.

```
if (address.ID !== addressForm.addressid.value) {  
  for (var i = 0; i < addressBook.addresses.length; i++) {  
    if (addressBook.addresses[i].ID === addressForm.addressid.value) {  
      addressForm.invalidateFormElement();  
      throw new Error('Address name already exists');  
    }  
  }  
}
```

□□□ □□□□ □□ ID □□ □□□ □□ □□□□ □□□□□ □ □□□ □□□ □□□□ □□□□?

A. addressForm.invalidateFormElement("addressid");

B. addressForm.addresssid.invalidateFormElement = □;

C. addressForm.invalidateFormElement(addressForm.addressid);

D. addressForm.addresssid.invalidateFormElement();

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 134

□□ □□ □□□ □□□ □□□ □□□□ □□□□. □□□ □□□□ □□□ □□□□□ □□ □□□ □□□ □□□□ □□□.

```
var paymentInstruments = order.getPaymentInstruments(PaymentInstrument.METHOD_DW_APPLE_PAY).toArray();  
  
if (!paymentInstruments.length) {  
  // Log Error Message  
  return null;  
}  
  
var paymentInstrument = paymentInstruments[0];  
var paymentTransaction = paymentInstrument.getPaymentTransaction();
```

□□ □ □□ □□□ □□□□ □□□□ □□ □□□□□?

A. Logger.error('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);

B. Logger.getLog().log('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);

C. Logger.exception('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);

D. Logger.fault('□□□ □□ Apple Pay □□ □□□ □□ □ □□□□.'+paymentInstruments);

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 135

steptype.json□ □□□ □□ □□□ □□□□ □□□□ □□□ □□ □□ □□ "No_FILES_FOUND"□ □□□□ □□□.

□□ □□ □□□□ □□ □□□ □□□□□?

A. var □□ = {□□: '□□'. □□□: 'NO_FILES_FOUND'};
□□ □□;

B. var status = require('dw/system/status');
□ □□(Status.OK, 'NO_FILES_FOUND')□ □□□□□.

C. this.status = 'NO_FILES_FOUND'
□□□ □□□□□□.

D. 'NO_FILES_FOUND' □□

Answer: B ([LEAVE A REPLY](#))



NEW QUESTION: 136

□□□ newsletter.xml □□□ □□ □□ □□□□□□.

<?xml □□="1.0"?>

<□□

xmlns=http://www.demandware.com/xml/form/2008-04-15

>

<field formid="email" lavel="□□□" type="String" required="True" □□ □□="50" />

</form>

□□ □□□□ □□□□ □□ JSON □□□ □□□□ □□ □□ □□□□□□?

A. Server.forms.getForm('dwfrm_newsletter')

□ □ □□□□:

En el Formulario:

B. Server.form.getForm('□□□□□');

C. Server.form.getForm('dwfrm_newsletter')

D. Server.forms.getForm('□□□□□');

Answer: ([SHOW ANSWER](#))

B2C-Commerce-Developer □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ B2C-Commerce-Developer □□! DumpTop
□ □□ **B2C-Commerce-Developer** □□ □□□ □□□□□□, DumpTop B2C-Commerce-Developer □□ □□□ □□□□□□□□
□□□ □□□□□□□. □□□□ □□□ □□□□ □□ DumpTop B2C-Commerce-Developer □□□ □□□□□.

<https://www.dumptop.com/Salesforce/B2C-Commerce-Developer-dump.html> (208 Q&As Dumps, **30%OFF** Special Discount:
KrDump)

NEW QUESTION: 137

□□□□ □□□□ Storefront□ □ □□□ □□□□ □□□□ □□ □□ □□□□□.

```
apiContentSearchModel.setFilteredByFolder(false);
```

□□□ □□□ □□□□□?

- A. ConrencSearchModel□ □□□□ □□ □□□ □□□□□.
- B. Page Designer □□□ □ □□ □□□ □□□ □ □□□ □□□.
- C. Page Designer □□ □□□ □□□ □□□ □ □□ □□ □□□ □□□□□□.
- D. □□□ □□ □□□ □□□□ □□□ □□□ □□ □□ □□□ □□□□□□.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 138

□□□□ □□ □□□ □□□ □□□□ □□□□□ "□□□" □□□□□ □□□ □□ □□ □□□ □□□ □□□□ □□□.
□□□ □□□ □□ □□ □□□ □□□□□ □□□□□ □□□ □ □□□□ □ □□ □□□ □□□□ □□ 06 □□ □□□□ □□□□ □
□ □□ □□ □□□□□?

```
01 var Logger = require('dw/system/Logger');  
02 var service = dw.svc.LocalServiceRegistry.createService('contact.http.submit', options);  
03 var serviceResponse = service.call(request);  
04  
05 if (serviceResponse.ok) {  
06     // Insert logging code here  
07 }</span>
```

A)

```
Logger.getLogger('contact').debug('Contact service responded with OK.')
```

B)

```
Logger.debug('Contact service responded with OK.')
```

C)

```
Logger.customLogger('contact').debug('Contact service responded with OK.')
```

A. □□ B

B. □□ C

C. □□ A

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 139

□□□ □□□□ □□ □□□ □□□□ Business Manager□□ □□□ □□ □□□ □□□ □ □□□□. □□□□ □□□ □ □ □□□ □□
□ □ □ □□□□.

□□□ □□□□ □□ □□□□ □□ □□□ □□□ □□□□?

A. □□□ □□□ □□ □□

B. □□□ □□□□ □□ □□□□ □□

C. □□□ □□□ □□□ □□ □□□ □□□□□.

D. □□□ □□ □□ □□□ □□□ □□□□□.

Answer: ([SHOW ANSWER](#))

□□/□□:

NEW QUESTION: 140

□□□ newsletter.xml □□□ □□ □□ □□□□□□.

<?xml □□="1.0"?>

<□□

xmlns=http://www.demandware.com/xml/form/2008-04-15

>

<field formid="email" lavel="□□□" type="String" required="True" □□ □□="50" />

</form>

□□ □□□□ □□□□ □□ JSON □□□ □□□□ □□ □□ □□□□□□?

A. Server.forms.getForm('□□□□');

B. Server.form.getForm('dwfrm_newsletter')

C. Server.forms.getForm('dwfrm_newsletter')

□ □ □□□□:

```
var transaction = require('dw/system/transaction');  
var preferencesForm = server.forms.getForm('preferences');  
var csrfProtection = require('*/cartridge/scripts/middleware/csrf');
```

En el Formulario:

```
<?xml version="1.0"?>  
<form>  
  <field formid="interestApparel" label="forms.preferences.apparel" type="boolean" />  
  <field formid="interestElectronics" label="forms.preferences.electronics" type="boolean" />  
  <field formid="newsletter" label="forms.preferences.newsletter" type="boolean" />  
  
  <action formid="apply" valid-form="true"/>  
</form>
```

D. Server.form.getForm('□□□□');

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 141

□□□ □□ □□□ □□□□□.

* □□□ □□ □□□□ □□ Storefront □□□ □□□ □□□ □□□ □□□□ □□

* Which of the following is a valid storefront type?

* Which of the following is a valid storefront type?

Which of the following is a valid storefront type?

* A. Which of the following is a valid storefront type?

* B. Which of the following is a valid storefront type?

* C. Which of the following is a valid storefront type?

Which of the following is a valid storefront type?

A. Which of the following is a valid storefront type?

B. Which of the following is a valid storefront type?

C. Which of the following is a valid storefront type?

D. Which of the following is a valid storefront type?

Answer: (SHOW ANSWER)

NEW QUESTION: 142

Which of the following is a valid storefront type?

Which of the following is a valid storefront type?

Which of the following is a valid storefront type?

A. Which of the following is a valid storefront type?

B. Which of the following is a valid storefront type?

C. Which of the following is a valid storefront type?

Answer: A (LEAVE A REPLY)

NEW QUESTION: 143

Which of the following is a valid storefront type?

```
var paymentInstruments = order.getPaymentInstruments(PaymentInstrument.METHOD_DW_APPLE_PAY).toArray();

if (!paymentInstruments.length) {
    // Log Error Message
    return null;
}

var paymentInstrument = paymentInstruments[0];
var paymentTransaction = paymentInstrument.getPaymentTransaction();
```

Which of the following is a valid storefront type?

A. Logger.error('Which of the following is a valid storefront type?'+paymentInstruments);

B. Logger.exception('Which of the following is a valid storefront type?'+paymentInstruments);

C. Logger.fault('Which of the following is a valid storefront type?'+paymentInstruments);

D. Logger.getLog().log('Which of the following is a valid storefront type?'+paymentInstruments);

Answer: B (LEAVE A REPLY)

NEW QUESTION: 144

Which of the following is a valid storefront type?

D. `<isslot id="my_banner " description="for home page" context="global" context- object="{pdict.CurrentHomePage}"/>`

□□/□□: <https://docplayer.net/62289631-Developing-in-demandware-student-guide.html>

[illegible]

Answer: ([SHOW ANSWER](#))

D. □□□□ □□□ □□□□ □□ □ □□ □□□ □□□□□□.

Answer: (SHOW ANSWER)

Updating the Cartridge Path

If you are using controllers, you must upload the app_storefront_controller cartridge, but you don't need to add it to the cartridge path.

1. In **Business Manager**, select **Administration > Sites > Manage Sites**.
2. Select **SiteGenesis** or your **site** and click the **Settings** tab.
3. Add the Commerce Cloud Endless Aisle cartridges to the list of cartridges:
 - a. If you are using Endless Aisle pipelines add the following to the beginning of your path: int_ocapi_ext_core:int_ocapi_ext_pipelines.
 - b. If you are using Endless Aisle controllers add the following to the beginning of your path: int_ocapi_ext_core:int_ocapi_ext_controllers.
 - c. If you are using the **SiteGenesis** with Salesforce B2C Commerce storefront cartridge add the following to your path: ea_sitegenesis_storefront_richUI:ea_sitegenesis_storefront.
4. Add the Verifone cartridges to the list of cartridges if using Verifone devices:
 - a. If you are using Endless Aisle pipelines and Verifone devices add the following to the beginning of your path: int_verifone_dss_core:int_verifone_dss_pipelines.
 - b. If you are using Endless Aisle controllers and Verifone devices add the following to the beginning of your path: int_verifone_dss_core:int_verifone_dss_controllers.
5. Click **Apply**.
6. Add bm_instore to the **Business Manager** cartridge path:
 - a. Click the **Business Manager** link below the **site** table.
 - b. Add :bm_instore to the end of the **cartridge** path.
 - c. If you plan to use Endless Aisle Sales Reports in **Business Manager**, add int_ocapi_ext_pipelines:int_ocapi_ext_core: to the **cartridge** path.
 - d. Click **Apply**.

NEW QUESTION: 147

□□□ □□□□ □□ □□□ □□ □□□ □□□□ □□□. □□□□ □□ □□□ □□□ □□□□ □□□□ □□□□□. □□□□ □□ □□□ □□ □□□ □□□□ □□ □□□ □ □□ □ □□ □□□ □□□□□? □□ 2□ □□

- A. □□□ □□ > □□ □□□ □□□□ □□□ □□□□ □□□□ □□ □□□ □□□.
- B. □□□ □□□□ □□□□□ producttile.isml □□□□ □□ □□□ □□□□□.
- C. □□□□□□ □□□□ □□ □□□ □□□□□ □□ □□□ □□ □□ □□□ □□□.
- D. □□ > □□□ □□□□ □□□ □□ □□□□ □□□□ □□ □□ □□□ □□ □□□ □□□.

Answer: (SHOW ANSWER)

NEW QUESTION: 148

□□□ □□□□□ □□□□ □□□□ □□ □□□ □□□ □□□□ □□□ □□□□ □□□□□ □□□ □□□□. □□□ □□□□ □□ □□□ □□□□.

* □□□ □□□

* □□ □□□ URL

□□□□□ □□□ □□□□ □□□□□□ □□□□□ □ □□□□□ □□□□□.

□□□□ □□□ □□ □□□ □□□□ □□ □□ □□ □□□ □□□ □□□?

- A. □□□ □□□□ □□□ □□□□ □□□ □□□ □□□□□.
- B. □ □□□ □□□ □□ □□□□ □□ □□□ □□□□ □□□ □□ □□□ □□□□□.
- C. □ □□□ □□ □□□ □□ □□□□ □□□□□ □□□ □□□ □□□ □□□□□.
- D. □ □□□ □□ □□□ □□ □□□□ □□□□ □□ □□□ □□ □□ □□□ □□ □□□ □□□□□.


```
function (formgroup) {
    var CSRFProtection = require('dw/web/CSRFProtection');

    if (!CSRFProtection.validateRequest()) {
        app.getModel('Customer').logout();
        app.getView().render('csrf/csrffailed');
        return null;
    }

    var result = {cart: cart, EnableCheckout: true, dontRedirect: true};

    if (formgroup.couponCode.htmlValue) {
        var status = cart.addCoupon(formgroup.couponCode.htmlValue);
        // Update result with status of coupon
    } else {
        result.CouponError = 'COUPON_CODE_MISSING';
    }
    return result;
}
```

□□□ □□□□ □□ □□□□ □□□ □□□□ □□□?

- A. Business Manager □ CSRF □□□ □□□□ □□□□□□□.
- B. CSRF □□□ □□□ □□□ □□□ □□□□ □□□□.
- C. CSRF □□□□□ □□□□ □□□□ □□□ □□□□ □□□□.
- D. □□ □□□ □□ □□□ true □ □□□□ □□□□.

Answer: ([SHOW ANSWER](#))

B2C-Commerce-Developer □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ B2C-Commerce-Developer □□! DumpTop
 □ □□ **B2C-Commerce-Developer** □□ □□□ □□□□□□, DumpTop B2C-Commerce-Developer □□ □□□ □□□□□□□□
 □□□ □□□□□□□. □□□□ □□□ □□□□ □□ DumpTop B2C-Commerce-Developer □□□ □□□□□.

<https://www.dumptop.com/Salesforce/B2C-Commerce-Developer-dump.html> (208 Q&As Dumps, **30%OFF** Special Discount:

KrDump)

NEW QUESTION: 152

□□□ □□□□ □□□ □□ □□□□□ □□ □□□ □□□□ □□ □□□□□□.

```
var productSearchHits : Iterator = pdict.SearchResult.getProducts();
var foundProduct : dsalesforceProduct;
var results = new ArrayList();

while (productSearchHits.hasNext()) {
    foundProduct = productSearchHits.next();

    if (foundProduct.custom.isOnSaleFlag == "true") {
        results.add(foundProduct);
    }
}

return results;
```

□□□□ □□□ □□□□ □□ □□□ □□ □□□?

□□□□□□ □□ □□□ □ □ □□ □□□□ □□□□ □□□□□.

□□□ □□□□ Storefront □□□ □□ □□□ □□□ □ □□ □□□□ □ □ □□□□.

□□□ □□□□□?

- A. New Arrivals □□□□□ □□ □□ □□□ □□□ □□□□□ □□□□□.
- B. □□ □□□ □□□ □□ □□□□□ □□ □□□□ □□□□□.
- C. □□ □ □□ □□□□ □ □□□ □□ □□ □□□ □□□ □□□□□.
- D. □□ □□□ □□ □□ □□□ □□□ □□□□ □□□□□.

Answer: (SHOW ANSWER)

NEW QUESTION: 159

□□□ □□□□ □□□ □□ □□ ID□ □□□ □ □□□ □□□□ □□□□ □ □□□ □□□□ □□□. □□ □□ □□□ □□□ □□□

□ □□ Cart.js □□□□□ □□ □□□□.

□□ □□ □□ □□□ □□ XML□ □□ □□ □□ □□□ ISML □□□□□ □□□□.

□□ □□□ ISML □□□□ □□ □□ □□□□□.

```
<button type="submit" value="{pdict.CurrentForms.cart.addRewardPass.htmlName}"
name="{pdict.CurrentForms.cart.addRewardPass.htmlName}">
  ${Resource.msg('rewards.apply','locale',null)}
</button>
```

□□□ □□□□ □ □□□ □□ □□ □□ □□□ □□□□□ □□ □□ □□□ □□□□ □□□?

- A**

 - Add an <action /> node to the form definition XML with the attribute formid="addRewardPass"
 - Add the key addRewardPass, with a processing function as a value, to the object passed to the Form.handleAction() method in the Cart.js controller

B

 - Add a <submit /> node to the form definition XML with the attribute formid="addRewardPass"
 - Add the key addRewardPass, with a processing function as a value, to the object passed to the Form.handleAction() method in the Cart.js controller

C

 - Add the attribute addtl-form-action="addRewardPass" to the ISML form
 - Add the key addRewardPass, with a processing function as a value, to the object passed to the Form.handleAction() method in the Cart.js controller

D

 - Add an <action /> node to the form definition XML with the attribute formid="addRewardPass"
 - No change to Cart.js controller required

- A. ☐ ☐ A
- B. ☐ ☐ B
- C. ☐ ☐ C

D. □□ D

Answer: C (LEAVE A REPLY)

NEW QUESTION: 160

```

□□□ □□□□ JavaScript □□□□□□ ISML □□□□□ □□□ □□□□ □□□ myProduct□ □□□□□ □□□ □□□ □□□□□
□□□.

```

□□ □□ □□□ □□ □□□□□?

- A.** ISML.renderTemplpate("helloworld.isml", { "myProduct": "product" });
- B.** ISML.renderTemplpate("helloworld.isml", { "□□": myProduct });
- C.** ISML.renderTemplpate("helloworld.isml", { □□: myProduct });
- D.** ISML.renderTemplpate("helloworld.isml", { myProduct: □□ });

Answer: A (LEAVE A REPLY)

22

NEW QUESTION: 161

□□□ □□□□ □□ □□□ □□ □□ □□□ □□□□ □□□□. □□ OCAPI(Open Commerce API) □□□ □□□□ □□□□ □□□
□.

```
POST /dw/shop/v18_3/products/(creative-zen-v,namco-we-ski-wii)?client_id=aaaa...
HTTP/1.1 Host: example.com
```

- □□□ □□□ □□□□ □□□?
- A.** HTTP □□□ GET□□ □□□□□.
- B.** URI□ /dw/shop/v18_3/products/creative-zen-v□ □□□□□.
- C.** □□□ □□ □□□ □□□□□.
- D.** HTTP □□□ PUT□□ □□□□□.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 162

dw.ison

npm ☐☐☐☐☐ ☐☐☐ ☐ ☐☐☐ ☐ ☐☐☐☐☐ ☐☐☐☐☐?

□ □ 3 □ □ □

- A.** CSRF ☐☐
- B.** ☐☐☐ ☐☐/☐☐☐☐
- C.** ☐☐☐ ID
- D.** ☐☐ ☐☐
- E.** ☐☐☐ ☐☐

Answer: A,C,D (LEAVE A REPLY)

NEW QUESTION: 163

Business Manager□ □□□ □□□ □□□□.

```
* □□ □□ □□□ "□□"□□□.  
* INFO□ □□ □□  
□□ □□□ □□□ □□□□□.  
Var log = Logger.getLogger("□□","□□□□□");  
Log.info("□□□ □□□ □□□□□");  
□ □□□ □□□□ □□□ □□□ □□ □□□ □□ □□□ □□□□□?  
A. □□ □□□□  
B. □□ □□□□  
C. □□  
D. □□□ □□
```

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 164

```
□□□□□ □□□ □□ □□□□ □□ □□□ □□□□□□□.  
* □□ □□ '□□ □□ □□ □□'□ □□□ □□□□ □□□□.  
* □□□ □□□ □□ 3□□ □□ □□□ XyzTv TV□ □□ "□□ □□ □□ □□" □□□ □□□□ □□□ □□□□□□.  
□□ □□□ □□□□ □□ □□□□ □□□ □□□□□?  
A. module.superModule□ □□□□ CheckoutShippingservices □□□□□ □□□□ □□□ □□□□ □□ □□□ □□□□□.  
B. '□□ □□ □□ □□'□ □□ □□ □□□ 'brand equals XyzTV'□ □□ □□ □□□ □□□□ □□ □□ □□□ □□ □□ □□□ □□□  
□.  
C. module, super Module□ □□□□ cartridge/models/shipping/shippingMethod.js□ □□□ □□□□ □□□ □□□□ □□ □□□ □□  
□□□.
```

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 165

```
□□□ □□□ □□ □□□□ □□□□□.  
* □□□ □□ □□□□ □□□ □□ □□□□ □□□ □□□□.  
* □□ □ □□□ □□ □□ □□□ □□□ □□ □□ □□□□ □□□□□.  
□□□□ □□ □□□□ □□□ □□ □□□ □□□ □□□□ □□□ □□ □□□ □□□□ □□□.□□□□ □□ □□□□ □□□□ □□  
□ □□ □□□ □□□□ □□□ □□□ □□□□□□□□□ □□ □□□ □□□ □□ □□□□ □□□□ □□ □□□ □□ □□□ □□□ □  
□□□□□.  
□□□□□ modifyGETResponse□□ □□□□ validatebasket□□ □□□ 4□□ □□□ □□□□□.  
* Dw.ocapi.shop.basket.modifyGETResponse  
* -- □□ □□ -  
* -- □□ □□ --  
* dw.ocapi.shop.basket.validateBasket  
□□□ □□ □ □□ □□□ □□□□□?  
A. dw.ocapi.shop.basket.shipment.afterDELETE  
B. dw.ocapi.shop.basket.shipment.beforePATCH  
C. dw.ocapi.shop.basket.shipment.beforeDELETE  
D. dw.ocapi.shop.baskep.shopment.beforePOST
```


B. ☐ ☐ ☐ ☐ ☐ ☐

C. □□□□□ ID

Answer: B (LEAVE A REPLY)

NEW QUESTION: 177

□□□□ □□ 30□ □□□ □□ □□□ □□□ CSB □□□ WebDAV □□□ □□□□□ □□□□ □□□.

□□□ □□ □□□ □□□□ □□ □□□ □□□ □□□□□?

A. Business Manager

B. □ □□□ □□ OCAPI □□□ □□□□ □□ □□□ □□□ □□□□□.

C. □□ □□ □ □□ CommonJ5 □□ □□ □□□□□ □□□□ □□□□□.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 178

Universal Containers □ OCAP(Open Commerce API) □ □□□ □□ □□□ □□□□ □□□□.

[illegible]

A. dw.ocapi.shop.order.validateOrder

B. dw.ocapi.shop.basket.calculate

C. dw.ocapi.shop.basket.afterPostShipment

D. dw.ocapi.shop.order.afterPOST

Answer: ([SHOW ANSWER](#))

□ □ :

NEW QUESTION: 179

[illegible]

□ □□ □□□ □□□ □ □□□□ □□□ □□ □□□ □□□□ □□ □□□□ □□ □□□ □□□□□?

A. □□□□□□ □□□ □□ □□□ □□ □ □□ □□□□ □□ = True□ □□□□□.

B. ☐☐☐ ☐☐☐☐☐☐ ☐☐☐ ☐☐ ☐☐☐☐☐.

C. □□□□□□ □□□ □□ □□ □□□ □□ □□□□ □□

D. □□□□□□ □□□ □□ □□ □□□ □□ □□□□ □□

Answer: D (LEAVE A REPLY)

NEW QUESTION: 180

[illegible]

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ ?

A. CustomObjectMgr.createCustomObject(primaryKey);

B. CustomObjectMgr.createCustomObject(CustomObjectType,primaryKey)

C. CustomObject.createCustomObject(primaryKey,CustomObjectType);

D. CustomObject.createCustomObject(CustomObjectType,primaryKey);

Answer: D (LEAVE A REPLY)

NEW QUESTION: 181

D. 'NO_FILES_FOUND' ☐

Answer: B (LEAVE A REPLY)



NEW QUESTION: 184

□□□□□□ □□ □□ □□□□ □□□□ □□ □□ □□ □□ □□□□ □□□□.

```
var Logger = require('dw/system/Logger');
Logger.info(message);
```

□□□ □□□ □ □□□□ WebDAV □□□ □□□□ □□ □□ □□□ □ □ □□□□.
□ □□□ □□□□ □□ □□□□ □□□□ □□ □ □□ □□□ □□□□□?
□□ 2□ □□

- A. □□□ □□□ □□ □□□ □□ □□□ □□ □□□ □□□□□ □□□□□.
- B. □□ □□ □□ □□□ □□□ □□□□□.
- C. □□ □□ □□□ □□ □□□ □□□□□.
- D. □□ □□ □□□ □□□□ □□□□□.

Answer: (SHOW ANSWER)

NEW QUESTION: 185

□□□ □□□□ □□□□□ □□□ □□□□ □□ Open Commerce API □□□ □□□□ □□□□. □□ □□□ □□□ □□□□□.



- A. "write_attributes" □□ " (+□□)"□□ □□□□□.
- B. "methods" □□ ["get", "post"]□ □□□□□.
- C. "resource_id" □□ "/baskets/*/items"□ □□□□□.
- D. "read_attributes" □□ "(□□)"□□ □□□□□.

Answer: (SHOW ANSWER)

NEW QUESTION: 186

Which two statements are true regarding the following code?

```
dw.system.Logger.getLogger('login').debug("Login API has succeeded");
```

Which two statements are true regarding the following code?

Which two statements are true regarding the following code? (Choose two.)

- A. The code will log the message "Login API has succeeded" to the debug log.
- B. The code will log the message "Login API has succeeded" to the error log.
- C. The code will log the message "Login API has succeeded" to the info log.
- D. The code will log the message "Login API has succeeded" to the warn log.

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 187

Which two statements are true regarding the following code?

Which two statements are true regarding the following code?

- A. ISML.renderTemplate("helloworld.isml", { "myProduct": "product" });
- B. ISML.renderTemplate("helloworld.isml", { "myProduct": myProduct });
- C. ISML.renderTemplate("helloworld.isml", { myProduct: myProduct });
- D. ISML.renderTemplate("helloworld.isml", { myProduct: myProduct });

Answer: A ([LEAVE A REPLY](#))

URL: <https://documentation.b2c.commercecloud.salesforce.com/DOC2/index.jsp?topic=%2Fcom.demandware.dochelp%2FSGJC%2FPipelinetoControllerConversion.html>

NEW QUESTION: 188

Universal Containers is implementing a new feature.

Which two statements are true regarding the following code?

- A. The code will log the message "Login API has succeeded" to the debug log.
- B. The code will log the message "Login API has succeeded" to the error log.
- C. The code will log the message "Login API has succeeded" to the info log.
- D. The code will log the message "Login API has succeeded" to the warn log.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 189

Home-Show is a new feature implemented in the system.

```
server.get('Show', consentTracking.consent, cache.applyDefaultCache, function (req, res, next) {  
    // base code here  
});
```

Which of the following is a valid route for the Home page?
A. /home

```
server.append('Show', function (req, res, next) {  
  // custom code here  
});
```

- Which of the following is a valid route for the Home page?
- A. /home
 - B. /home/
 - C. /home/
 - D. /home/

Answer: D (LEAVE A REPLY)

NEW QUESTION: 190

- Which of the following is a valid route for the Home page?
- A. /home
 - B. /home/
 - C. /home/
 - D. /home/

Answer: A,D (LEAVE A REPLY)

NEW QUESTION: 191

- Which of the following is a valid route for the Home page?
- A. exports.PaymentForm = guard.ensure(['http', 'post', 'loggedIn'], handlePaymentForm);
 - B. exports.PaymentForm = guard.expose(['post', 'loggedIn'], handlePaymentForm);
 - C. exports.PaymentForm = guard.httpsPost(handlePaymentForm);
 - D. exports.PaymentForm = guard.ensure(['https', 'post', 'loggedIn'], handlePaymentForm);

Answer: D (LEAVE A REPLY)

Which of the following is a valid route for the Home page?

NEW QUESTION: 192

- Which of the following is a valid route for the Home page?
- ```
var Logger = require('dw/system/Logger');
Logger.info(message);
```
- A. /home

- B. □□ □□□ □□ □□□ □□ □□□ □□□ □□□□□ □□□□□.
- C. □□ □□ □□□ □□ □□□ □□□□□□.
- D. □□ □□ □□□ □□□□ □□□□□.

Answer: (SHOW ANSWER)

NEW QUESTION: 193

□□□□ Open Commerce API□ □□□□ □□ □□ □□□□ □□ □□□ □□□□ □□□.

□□ URL□ □□ □□□ □□□□.

`http://refarch.demandware.net/dw/data/v18_3/inventory_lists/ecom-inventory/product_inventory_records/00883408601`

□□□ □□□□ □□□□□□□ □□□□ □□ □□□□ OCAPI □□□□ □□ □□ □□□□ □□□□ □□□?

- A. □□□□□ ID
- B. □□ □□□□
- C. Inventory\_list

Answer: B (LEAVE A REPLY)

**B2C-Commerce-Developer** □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ B2C-Commerce-Developer □□! DumpTop  
□ □□ **B2C-Commerce-Developer** □□ □□□ □□□□□□, DumpTop B2C-Commerce-Developer □□ □□□ □□□□□□□□  
□□□ □□□□□□□□. □□□□ □□□ □□□□ □□ DumpTop B2C-Commerce-Developer □□□ □□□□□.

<https://www.dumptop.com/Salesforce/B2C-Commerce-Developer-dump.html> (208 Q&As Dumps, **30%OFF** Special Discount:  
**KrDump**)