

UiPath.UiPath-ADPv1.v2024-06-06.q59

□□□□:	UiPath-ADPv1
□□□□:	UiPath (ADPv1) Automation Developer Professional
□□□:	UiPath
□□ □□ □□□:	59
□□:	v2024-06-06
# □□ □:	947
# □□ □□□:	590
https://www.krdump.com/UiPath.UiPath-ADPv1.v2024-06-06.q59.html	

NEW QUESTION: 1

- UiPath□□ □□ □□□□□ □□□ □□□□□□□□?
- A. □□□□□ □□□ □□□□ □□□□ □□□ □□□□ □□ □□□□, □□□ □ □□ □□□ □□ □□□ □□□□ □□□ □□ □□□□ □.
- B. □□□□ □□□ □□ □ □□□□□ □□ □□ □□□ □□□ □□□□□.
- C. □□□□ □□□ □□□ □□□ □□□ □□ □□ □ □□□□□. □□□ □□□ □□□□□ □□ □□□ □ □□□ □□□□□ □□□□ □.
- D. □□□□ □□□ □ □□ □□□□□. □□ □□□□ □□□□ □□ □□ □□□□ □□ □□□□ □□□.

Answer: D (LEAVE A REPLY)

UiPath□ □□ □□□□□ □ □□ □□□□ □□□□ □□ □□□ □□□□ □□ □□□□ □□□□□. □□ □□□□ □□□□ □□ □□□ □□□ □ □□ □□□ □□□□□ □□□□□. □□ □□□□□ □□□ □□ □□□ □□□□□□ □□□□ □□□ □ □□□ □□ □□, □ □□, While, Do While □□ For Each □□□ □□□□ □□□□. □□□□□□ □□ □□□□ □□□□ □□ □□ □ □□□□ □□□□ □□□ □ □□□□ □□ □□□□ □□□. □□□□: □□ □□□□ □□ □□ □□□□□ □□ □□□□□□, ReFramework□ □□ □□□□□□ □□ □□ □□, □□□□□□ □□, □□ □□□□□□ □□□□ □□□□□ □□□

NEW QUESTION: 2

- REFramework□ □□□□ □□□ □□□□□ □□ □□□□□□□□ □□□□□ □□□ □ □□□ □□ □□□ □□□ □□□□□. □□ □ □□ □□□ □□□ □□ □□□ □□□□ □□□. □□□ □□□ □□ □□□ □□□ □□□ □□ □□□□□ □□□ □□□ □□□ □□□ □□□ □□□. □□ □□□ □□ □□ □□□ □□□ □□□ □□□ □□□□ □□□□. □□ □□□ □□□ □□ □□□ □□□ □□□□ □□□?
- A. □□□□ □□
- B. □□□□□□ □□
- C. □□□□ □□
- D. □□□ □□

Answer: A (LEAVE A REPLY)

□□ □□□ □□□ □□□ □□□ □□ □□ □□□ □□ □□ □□□ □□□□ □□□□□. □□□□ □□□ □□□□□□ □ □□□ □□ □□□ □□ □□□□ □□□□ □□ □□□□ □□ □□□□ □□ □□□□ □□ □□□□ □□□ □□□□□ □□□

```

    public void Throw()
    {
        throw new UiPath.Core.BusinessRuleException("Error: [Invalid vs Invalid], [Throw], [Invalid]");
    }
}

```

NEW QUESTION: 3

REFramework□□ TransactionNumber□ □□□□ □□□ □□□□□?

- A.** RetryCurrentTransaction.xml □□□□□□ □□□□□□.
- B.** SetTransactionStatus.xml □□□□□□ □□□□□□.
- C.** □ □□□□□ □□ □□□□□□.
- D.** RetryCurrentTransaction.xml □□□□□ □ SetTransactionStatus.xml □□□□□□ □□□□□□.

Answer: ([SHOW ANSWER](#))

```
TransactionNumber 00000000 SetTransactionStatus.xml 00000000. 000000 Orchestrator  
00 00 0000 000 000 000000 TransactionNumber 1 000000. TransactionNumber 000 0000 0000  
00 0000 000000 00 0000 000 0000 0 000000. 0000:  
[SetTransactionStatus.xml]
```

NEW QUESTION: 4

RPA □□□ □□□□□□ □□□□ □□ □□□□□ □□□ □□□□ □ □□□□ □□ □□□ □□□□□.



- □□□ □□ MessageBox□ □□□ LogMessage□ □□□□ □□ □□ □□□□ □□ □□□ □□□ □ □□□?
- A.** □□ □□□.
- B.** □□ □□□□□ □□□□.
- C.** □□ □□□ □□□□□.
- D.** □□ □□□ □□□□□.

Answer: C (LEAVE A REPLY)

[illegible]

NEW QUESTION: 5

□□□□ Orchestrator □□□□ □□□□ □□ □□ REFramework□ □□□□□ □□□□□ Orchestrator□ □□ □□□□ □□□ □□ □
□ □□ □□ □□□ □□□□□?

A. □□ □□ □□□□ Get Transaction Data □□□ □□□□□. Config.xlsx□□ OrchestratorQueueName □□□ □□□□ □□ □□□ □
□□□□.

B. Config.xlsx ☐☐☐☐ OrchestratorQueueName ☐☐☐ ☐☐☐☐☐. SetTransactionStatus ☐☐☐☐☐☐ ☐ ☐☐ SetTransactionStatus ☐
☐☐ ☐☐☐☐ ☐☐☐ ☐☐☐☐☐.

C. □□ □□ □□□□ Get Transaction Data □□□ □□□□□. □□□□□□ □□ □□ □□□□ □□□ □□□□ □□ □□□ □□□□□.

D. □□□□□□ □□ □□ □□□□ □□□ □□□□□□. SetTransactionStatus □□□□□□ □ □□ SetTransactionStatus □□□ □□□□
□□ □□□ □□□□□□.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 6

□□□ □□□□ "dt"□□ □□□ □□□□ □□□ □□ □□□□ □□□ □□□□.

	A	B	C
1	No.	Item	Quantity
2		1 apple	10
3		2 orange	20
4		3 mango	5
5		4 kiwi	80
6		5 pear	1
7		6 apple	5
8		7 apple	12
9		8 mango	15

□□ □ □□□ □□□□ □ □□□ □ □□ LINQ □□□ □□□□□?

A. `dt.AsEnumerable. Max(Function(x) Convert.ToInt32(x("□□").ToString))("□□")`

B. `dt.AsEnumerable().OrderByDescending(x => Convert.ToInt32(x.ToString())).First()`

C. `dt.AsEnumerable. Max(Function(x) Convert.ToInt32(x("□□").ToString))`

D. `dt.AsEnumerable().GroupBy(x => x["Category"].ToString()).Max(Function(x) x.Sum(Function(y) Convert.ToInt32(y["Quantity"].ToString))))`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 7

Citrix Virtual Apps and Desktops 7 2109 ☐ ☒☐ ☐ ☐ ☐ UiPath ☐ ☐☒ ☐ ☐ ☐ ☐ ☐

A. Citrix □□ □□ □□□ □□□□□□ UiPath Remote Runtime □□ □□□ □□□□□ □□ □□□□□□.

B. □□□ □□ □□ □□□ □□□□□ □□□□□ UiPath Remote Runtime□ □□□□ □□□□ □□□□.

C. □□□□ □□ □□□ □□□□ Citrix □ UiPath □□□ □□□□ □□□ □□□□□ □□ □□□□□.

D. UiPath Remote Runtime ☐ Citrix ☐☐☐ ☐☐ ☐☐ ☐☐☐☐ ☐☐☐☐ ☐☐☐☐.

Answer: B (LEAVE A REPLY)

□□□ □□ □□ □□□ □□□□□ Citrix Virtual Apps and Desktops□□ □□□□ UiPath Remote Runtime□ □□□□ □□□□ □□□ □
□□. □□□ □□□ □□□ □□ □□□ □□□□ □□ □□ □□□ □□□□ □□□□ □□□□ □□□□.

NEW QUESTION: 8

RE(Robotic Enterprise) □□□□□□□ □□□□ □□□□ □□ □□□□ □□□□ □□ □□ □□□ □□□□□ □□ □□□ "□□"□ □□
□□ □□□ □□□□ □□□□ □□ □□□ □□□□□?

- A.** Catch ☐☐☐☐ ☐☐☐ ☐☐☐ ☐☐☐.
- B.** ☐☐ ☐☐☐☐ ☐☐☐☐ ☐☐☐ ☐☐.
- C.** ☐☐☐ ☐☐ ☐☐☐ ☐☐.
- D.** ☐☐☐ ☐ ☐☐☐☐ ☐☐☐ ☐☐☐ ☐☐☐.

Answer: A (LEAVE A REPLY)

0000 0000 00 0000 0000 00 00 0000 00000 00 000 "00"0 0000 000 0000 0000 00 0
 00 00 0000 0000 000 000000. 000 00000 00 0 000 00 000 0000 0000 00000000. 00
 0 000, 0000 0 00 000 000000. 00 000 0000 000 00 00 000 0000 0000 000000. 00 00
 0 00, 0000 00, 00, 00, 00 00 00000 000 0 0000. 00 000 00000 000 0, 0000 000 0, 00 00
 0 00000 00 00 000 0000 0 00000. 00 000 000 00 00 000 000000, 0 0000 00 000 00 0
 0 0000 0000 000 000 0000 0000. 00 0000 0000 0000 0000 0000 0000 0000 000 000 00
 00 0 000 0 0 0000. 00 0000 0000 000 000 0000 0000 0000 0000 00 00 00 00 000 0 00 000
 0000 0000 0 000 0 00 0000. 0000: [00 00],
 [00 00 00]

NEW QUESTION: 9

□□ □ UiPath □□□□□ LINO□ □□□□ □□□□ □□□□ □□□ □□□□ □□□ □□ □□□□□?

- A.** LINQ `listOfIntegers.Sum(Function(x) x)` `listOfIntegers.Sum(x => x)`
- B.** LINO `listOfStrings.FilterEmails().ToList()` `listOfStrings.Where(x => !x.Contains("@")).ToList()`
- C.** LINO `dataTable.ToJSONf(DataTable JSON)`
- D.** LINQ `listOfStrings.Max(Function(x) x.Length)` `listOfStrings.MaxBy(x => x.Length)`

Answer: A ([LEAVE A REPLY](#))

UiPath□ LINQ(Language Integrated Query)□ □□□□ □□□ □□□ □□ □□□□□. LINQ □□
'listOfintegers.Sum(Function(x) x)'□ LINQ□ □□□□ □□ □□ □□□ □□□□ □□□ □□□ □□□ □□□□ □□□□□.

NEW QUESTION: 10

REFramework□□ □□ □□□ □□□□ □□□□ □□ □□ □□□ □□□□□?

- A.** `InitAllSettings` XAML `Page` `Page`
- B.** `SetTransactionStatus` XAML `Page` `Page`
- C.** `InitAllSettings` XAML `Page` `Page`
- D.** `SetTransactionStatus` XAML `Page` `Page`

Answer: C (LEAVE A REPLY)

NEW QUESTION: 11

REFramework□□ □□ □□□ □□□□ □□□□ □□ □□ □□□ □□□□□?

- A. ☐ ☐ ☐ ☐ XAML ☐ ☐ ☐ ☐

C. ☐ ☐ ☐ ☐ ☐ ☐ UiPath Studio, Assistant ☐ Robot ☐ ☐ ☐ ☐.

Answer: ([SHOW ANSWER](#))

[illegible]

```
□□□: "@SQL=""urn:schemas:httpmail:subject"" like 'UiPath%'"
```

```
□□□: "@SQL=""urn:schemas:httpmail:subject"" like 'UiPath%'"
```

```
□□□: "@SQL=""urn:schemas:httpmail:subject"" like '%UiPath%'"
```

```
□□□: "@SQL=""urn:schemas:httpmail:subject"" like '%UiPath%'"
```

- o "UiPath" Outlook

```

SQL  urn:schemas:httpmail:  .

```

□□□ □□(%)□ □□ □□ □□□□ □□□□ □□□□□□□□. □□□ □□ □□□□

[illegible]

□□□ □□ □□□ "UiPath"□ □□□□□. □□ □□: Outlook □□ □□□ □□

UiPath-ADPv1                               

[illegible][illegible][illegible]

C. □□□ > □□□□ □□□□ □□ □□ □□ □□□□. □□ □□ □□□ □□ □□□ □□ □□□□ □□□□.

[illegible]

Answer: A (LEAVE A REPLY)

UiPath Orchestrator □ □□ □□ □□□□ □□□ □□ □□□□ □□□□ □□□ □□□□ □□□ □□□□□. □□ □□□□ □□□□ □□
□, □□□□, □□□□□ □□ □□ □ □□□ □□□ □□ □□□ □□□□ □□□ □ □□□□. □□□□ □□ □□ □□□ □□ □□□ □□
□ □□□ □□ □□□□.

UiPath 2024.7.0.0

NEW QUESTION: 18

□□□ □□□□ □□□ □□ □□ □□□ □□□□□?

- A.** 1□
- B.** 5□
- C.** 10□
- D.** 15□

Answer: B (LEAVE A REPLY)

[illegible]

NEW QUESTION: 19

"arrayOfPomtsGainedByPanicipant" □□ □□□ □□□□ □□ □□□ □□□□□□.

```
{ "7", "4", "1" }. arrayOfPointsGainedByParticipant(1)
```

- A.** □ : 4
□□□ □□ : □□
- B.** □ : 7 □□□ □□ □□□
- C.** □ : 4
□□□ □□ : □□□
- D.** □ : 7
□□□ □□ : □□

Answer: C (LEAVE A REPLY)

```
□□□□ □□ {"7", "4", "1"}□ "arrayOfPointsGainedByParticipant" □□□ □□□□,  
'arrayOfPointsGainedByParticipant(1)'□ □□□ □□□ 'String'□ □ '4'□ □□□□□. UiPath□ □□□□ .NET□ □□□ 0 □□□□□□.
```

NEW QUESTION: 20

□□□□ □□□□ □□□□ □□□□ □□ □□□□ □□□□ □□□□. □□□ □□ □□ □□□□□ □□□ □□□□ □
□□□□. □□ □□□ □□ □□□ □ □□□ □□□□□□.

□□□□ □□□ □ □□□□ □□□□ □□ □□□ □□□□ □□□□ □□□□?

- A.** `CursorMotionType` Smooth.
- B.** `Simulate`, `CursorMotionType` Instant.
- C.** `AlterIfDisabled` True.
- D.** `AlterIfDisabled` False.

Answer: (SHOW ANSWER)

NEW QUESTION: 21

UiPath□□ □□ □□ □□□ □□□ □□□□□?

- Answer: ([SHOW ANSWER](#))**

NEW QUESTION: 22

A. □□□□□ □□ □□ □□□ □□□□ VB MET □□□ □□□□□.

B. VB.NET □□ C# □□□ □□□□ □□□□□ □□ □□ □□□ □□□□□.

C. □□□□□ □□ □□ □□□ □□□□ VB MET □□ Java □□□ □□□□□.

D. Java □□□ □□□□ □□□□□ □□ □□ □□□ □□□□□.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 23

A. $\square\square\square\square\square\square\square\square$.

B. $\square\square\square\square\square\square\square\square\square\square$.

C. $\square\square\square\square\square\square$.

D. $\square\square\square\square\square\square\square\square\square$.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 24

A. □□ □□□□□□ □□ □□□□ □□□□ Orchestrator□□ □□□□ □□□□□ □□□□ □□□□□

B. □□□ □□ □□□ □□□□ □□□ □□□□ □□□ □□□□□.

C. UiPath Studio□ □□ □□□□□□ □□ □□□ □□□□□.

D. Orchestrator□□ □□□ □□ □□□□□ □□□□ □□ □□□□□ □□□□□.

Answer: (SHOW ANSWER)

UiPath                        

Orchestrator□□ □□□□□ □□□□ □□ □□□ □□□ □□□□ □□□□ □□□ □ □□□□. □□ □□ Salesforce□□ □□□□ □□
 □□ UiPath□□ □□ □□□ □□□□□□ □□□□□ □□□□ □□ □□□□ □□□ □ □□□□. □□□□ UiPath □□ □□□ □□ □□
 UiPath Studio□□ □□□□ □□□ □ □□□□.

NEW QUESTION: 25

□□ □□□□ "dt"□□ □□□ □□□□□.

	A	B	C
1	No.	Item	Quantity
2		1 apple	10
3		2 orange	20
4		3 mango	5
5		4 kiwi	80
6		5 pear	1

Assign □□□ □□□ □ qty □□□ □□ □□□ □□□?

Expression Editor

Set value (String)

```
1 dt.AsEnumerable.
2 SkipWhile(Function(x) x.Item.ToString.Equals("mango"))(0).ToString
```

OK Cancel

- ### D. null

Answer: C (LEAVE A REPLY)

Assign `dt["qty"] = dt["qty"] * 80`. `dt` Assign `dt["LINQ"] = dt.AsEnumerable().SkipWhile(x => x.Item1 < 1000000000).FirstOrDefault().dt["qty"] * dt["qty"]`. `dt` Assign `dt["DataTable"] = dt["DataTable"]`.

11

11

11

5

33

10

11

20

333

80

11

40

```
AsEnumerable □□□□ DataTable□ DataRow □□□ Enumerable □□□□□ □□□□□. SkipWhile □□□□ □□□ false□ □ □□□
□□□□ □□□ □□□□□. □□□ Item □□ □□ "mango"□ □□□ □□□□ □□ □□□□. (0) □□□□ □□□ □ □□□□ □ □□ □
□□ □□□□□. Item □□□□ DataRow□ Quantity □ □□ □□□□□□. ToString □□□□ □□ □□□□ □□□□□. □□□□ □□
DataTable□ □□ □ □□ □□□□ □ □□ □□ Quantity □ □□ 80□ □□□□□.
```

□□□□: [DataTable.AsEnumerable □□□], [Enumerable.SkipWhile □□□], [DataRow.Item □□]

NEW QUESTION: 26

[illegible]

□□ □□□ □□□ □□□ □□□ □□□ □□ □□ Type Into □□□ □□ □□□ □□□□ □□□?

A. ☐☐ ☐☐

B. ☐ ☐ ☐ ☐

C. ☐ ☐ ☐ ☐

D. ☐☐☐☐☐ ☐☐ ☐☐

Answer: B (LEAVE A REPLY)

□□□□ □□□ □□ □□□ □□□□ □□ □□□ □□□ □□□ □□□□ □□□ □□□□ □□□□ □□ □□□ □ □ □□ □□□ □□□
 □ □□□. □ □□□ □ □ □□ □□□ □□ □□(□□□)□ □□□□□. □□□□ 10□□□□□□. □□□□ 1000□□□□□□. □ □□□
 □□ □□□ □□□□ □□ □□□ □□□ □□□ □□ □□□ □□□ □ □□□□. □□ □□ □□□□ □ □ □□ □□□ 100□□□□ □□
 □□ □□□ □□ □□□□ □ □□□ □□□□ □□ 0.1□ □□ □□□□□□. □□ □□: [□□ □□], [□ □□□ □□]

NEW QUESTION: 27

Orchestrator □□□ □□□□ □□ □□□□ □□□□ □□□□ □□ □□□□□□ □□ □□ □□ □□□□ □□□□ □□□□ □□□?

□□: □□□ □□ □□□ □□□ □□□□ □□ □□□ □□ □□□ □□□□.

Answer Area

Description

0 Retrieve the X-UiPath-Signature HTTP header.

0 To obtain the raw signature bytes, decode the value of the header from Base64.

0 Compare the computed signature to the value from X-UiPath-Signature HTTP header.

0 Compute the hash using SHA256 and the signing key (UTF-8 encoded).

Step Sequence

0

0

0

0

Answer:

Answer Area

Description

0 Retrieve the X-UiPath-Signature HTTP header.

0 To obtain the raw signature bytes, decode the value of the header from Base64.

0 Compare the computed signature to the value from X-UiPath-Signature HTTP header.

0 Compute the hash using SHA256 and the signing key (UTF-8 encoded).

Step Sequence

0 Retrieve the X-UiPath-Signature HTTP header.

0 To obtain the raw signature bytes, decode the value of the header from Base64.

0 Compute the hash using SHA256 and the signing key (UTF-8 encoded).

0 Compare the computed signature to the value from X-UiPath-Signature HTTP

NEW QUESTION: 28

REFramework□□ TransactionNumber□ □□□□ □□□ □□□□□?

A. SetTransactionStatus.xml □□□□□□ □□□□□.

B. □ □□□□ □□ □□□□.

C. RetryCurrentTransaction.xml □□□□ □ SetTransactionStatus.xml □□□□□ □□□□.

D. RetryCurrentTransaction.xml □□□□□□ □□□□□.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 29

BDD(Behavioral-Driven Development) □□□ □□□ □□□□ □□□ □□□□ □□ □□□ Surround with mock □□□ □□□□□?

- A. ☐☐☐
- B. ☐☐
- C. ☐☐
- D. ☐☐☐

Answer: ([SHOW ANSWER](#))

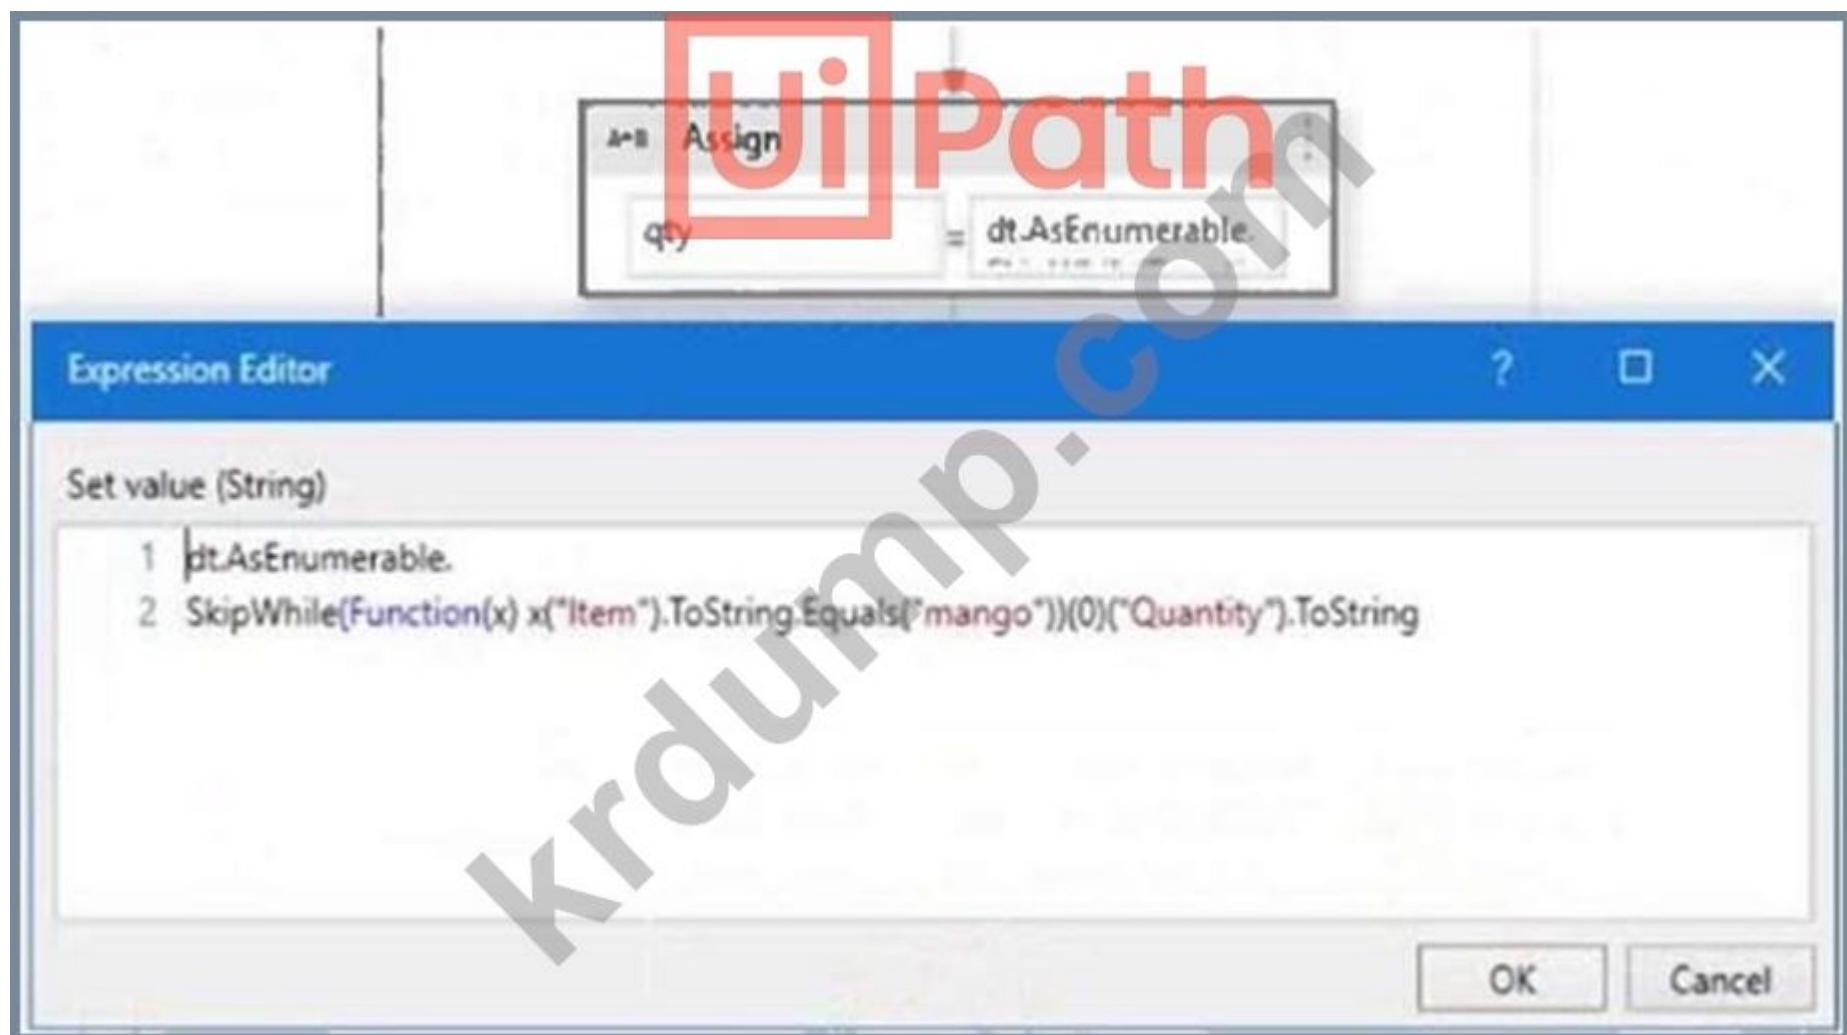
BDD(Behavioral-Driven Development) □□□ □□□□ □□□ □□□□ "Setup" □□□ Surround with mock □□□ □□□□□. □ □□□ □□ □□□□ □□□□ □□□ □□□□ □ □□□□□.

NEW QUESTION: 30

□□ □□□□ "dt"□□ □□□ □□□□□.

	A	B	C
1	No.	Item	Quantity
2		1 apple	10
3		2 orange	20
4		3 mango	5
5		4 kiwi	80
6		5 pear	1

Assign □□□ □□□ □ qty □□□ □□ □□□ □□□?



- A. null
- B. 80
- C. 10
- D. 5

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 31





□□ □□□□ □□□ □ □□ □ □□ □□□ □□□□□□?

- A. □□ □□ □ □□□□□ □□□□□□.
- B. □□ □□ □ □□ □□
- C. □ □□ □ □□□ □□.
- D. UI □□ □ □UI □□.

Answer: A ([LEAVE A REPLY](#))

UiPath□ □□ □□□□□ □□ □□□ □□□□□ □□□□ □ □□ □□□ □□□ □□□□.

□□ □□□ □□□□□□ □□□□ □□, □□□□□ □□□ □□ □□□□□□ □□□□ □ □□□□.

UiPath-ADPv1   DumpTop  **UiPath-ADPv1** ! DumpTop  **UiPath-ADPv1** 
 , DumpTop **UiPath-ADPv1**   .    
DumpTop **UiPath-ADPv1**  . <https://www.dumptop.com/UiPath/UiPath-ADPv1-dump.html> (208 Q&As Dumps, **30%OFF**
Special Discount: KrDump)

NEW QUESTION: 32

□□□□ □□□□ □□□ □□□□□. □□□ □□ □□□ □□□□ □□ □□ □□□□□. □ □□□ □□ '2023□ 3□ 3□'□□□. "2021
□ 11□ 20□". □□□□□□□ □□ □□□ DateTime □□□. □□□ □□□ □□ 7□ □□□□ □□□□ □□ □□□ □□□□ □□□?

- A.** `(DateTime.Now - DateTime.ParseExact(DateString, "dd MMM yyyy", CultureInfo.InvariantCulture)).Days < 7`
- B.** `(DateTime.Now - DateTime.ParseExact(DateString, "dd MMM yyyy", CultureInfo.InvariantCulture)).AddDays(-7).Days > 0`
- C.** `(DateTime.Now - DateTime.ParseExact(DateString, "d MMM yyyy", CultureInfo.InvariantCulture)).Days < 7`
- D.** `DateTime.Now.AddDays(-7) < DateTime.ParseExact(DateString, "dd MMM yyyy", CultureInfo.InvariantCulture)`

Answer: ([SHOW ANSWER](#))

- ```
* □□□ 'd MMM yyyy' □□□□□(□: '2023□ 3□ 3□').
* □□□ □□□ □□□ □□□□: (DateTime.Now - DateTime.ParseExact(DateString, "d MMM yyyy", CultureInfo.InvariantCulture)).Days <
7.
* □ □□□□ □□ □□(DateTime.Now)□ □□ □□□ □□(DateTime.ParseExact(DateString, "d MMM yyyy", CultureInfo.InvariantCulture))
□□ □□ □□□ □□□□□.
* □□ □□ □ □□□ 7□ □□□□□ □□□□□. □, □□□ □□ 7□ □□□□□ □□□□□.
```

**NEW QUESTION: 33**

```

REFramework 0000 000 000 00 0000. 0 00 000 00 000 00000. 0 000 00 0000 000
"00 0000 00" 000 0000 000. 000 0 000 00 00 00 0000 00000.
0000 0000 0 00 000 0000 00 00 0000 00 000000 00 000 0000 00 00 00 000 000 00
000?

```

- A.** `NullPointerException`  
**B.** ☐☐☐☐☐☐☐☐  
**C.** `BusinessRuleException`  
**D.** ☐☐☐☐☐☐

**Answer: (SHOW ANSWER)**

**NEW QUESTION: 34**

□□ □ UIPath Studio□ □□ □ □□ □□ □□□ □□□ □ □□ □□ □□□□□?

- A.** □□ □□
- B.** □□□□ □□ □□
- C.** □□□ □□
- D.** □□ □□



**NEW QUESTION: 37**

□□ □ UiPath Orchestrator□□ □□ □□ □□□ □□□ □□□ □□□□□?

- A. □□ □□□□□□□ □□□□ □□□□ □□□□□ □□ □□□□□□ □□□ □□□ □□□□□□.
- B. □□ □□ □□□ □□□□ □□ □□□ □□□ □□ □□□ □□□ □□□□ □□ □□□ □□□□□ □□□□□.
- C. □□ □□□□□ □□□□ □□□□□ □□ □□□ □□□ □□□□ □□ □□□ □□□ □□□□□.
- D. □□□ □□□□ □□□□□ □□□ □□□ □□□ □□ □□□ □□□ □□□□□.

Answer: ( [SHOW ANSWER](#) )

**NEW QUESTION: 38**

REFramework□ □□□□ □□□ □□□□□ □□ □□□□□□□□ □□□□□ □□□ □ □□□ □□ □□□ □□□ □□□□□. □□ □ □□ □□□ □□□ □□ □□□ □□□□ □□□. □□□ □□□ □□ □□□ □□□ □□□ □□ □□□□□ □□□ □□□ □□□ □□□□ □□□.

□□ □□□ □□ □□ □□□ □□□ □□□ □□□ □□□□ □□□□.

□□ □□□ □□□ □□ □□□ □□□ □□□□ □□□?

- A. □□□ □□
- B. □□□□□□ □□
- C. □□□□ □□
- D. □□□□ □□

Answer: ( [SHOW ANSWER](#) )

**NEW QUESTION: 39**

UiPath □□ □□ □□□□□□□ □□ □□□ □□□/□□□ □□□ □□ □□ □□□ □□□ □□□□ □ □□□□ □□ □□ □□□ □□□ □□□ □□?

- A. □□
- B. □□
- C. □□□
- D. □□

Answer: B ( [LEAVE A REPLY](#) )

UiPath □□ □□ □□□□□□□ □□ □□□ □□ □□□ □□ □□□□ □□□/□□□ □□□ □□ □□ □□□ □□□ □□□□ □ □□□ □□. □□ □□□ □□□□□ □□□ □ □ □□□□ □□□□□. □□□□ □□ □□□ □□ □□□□ □□□□□ □□ □□□ □□□ □ □□□ □□□ □ □□ □□□, □□ □ □□□ □ □□ □□□ □□□□ □□□□. □□□ □□ □ □□□□ □□□ □□□□□. □□ □□ □□□□ □□□ □ □□□□ □□ □□□ □□□ □□□□ □□ □□□ □□□□ □□ □□□ □□ □□□ □□□ □□□□ □□□ □□□□□. □□□□ □□ □□□ □□□ □ □□□ □□ □□□ □□ □□□□ □□□ □□ □□□ □□ □□ □□□ □□□ □□□ □□□□.

**NEW QUESTION: 40**

UIPath Studio□□ □□ Tor UI □□□ □□□ □□□□□?

- A. □□□□□□□/□□□□ □□
- B. □□□□ □□ □□□
- C. □□□□ □□□□
- D. □ □□ □□

Answer: D ( [LEAVE A REPLY](#) )



## Answer Area

### Description

- 1 Fill in the necessary publishing details, such as the project name, version, and description.
- 2 In the Design ribbon tab, click on the "Publish" button.
- 3 Click on the "Publish" button to initiate the publishing process.
- 4 Choose the desired publishing option, such as Orchestrator, Local, or Custom NuGet feed.

### Step Sequence

- 1 In the Design ribbon tab, click on the "Publish" button.
- 2 Choose the desired publishing option, such as Orchestrator, Local, or Custom NuGet feed.
- 3 Fill in the necessary publishing details, such as the project name, version, and description.
- 4 Click on the "Publish" button to initiate the publishing process.

## Answer Area

### Description

- 1 Fill in the necessary publishing details, such as the project name, version, and description.
- 2 In the Design ribbon tab, click on the "Publish" button.
- 3 Click on the "Publish" button to initiate the publishing process.
- 4 Choose the desired publishing option, such as Orchestrator, Local, or Custom NuGet feed.

### Step Sequence

- 1 In the Design ribbon tab, click on the "Publish" button.
- 2 Choose the desired publishing option, such as Orchestrator, Local, or Custom NuGet feed.
- 3 Fill in the necessary publishing details, such as the project name, version, and description.
- 4 Click on the "Publish" button to initiate the publishing process.

## NEW QUESTION: 43

□□□□ REFramework□□ □□□□□ □□□□□□. "Config.xlsx"□□ □□ □□ □□□ □□□□.

| 1 | Name                  | Value           |
|---|-----------------------|-----------------|
| 2 | OrchestratorQueueName | ProcessABCQueue |

Settings Constants Assets (+)

□□ REFramework □□□ □□□ □ □□□□ □□□ Config □□□ □□□ □□□□ □□□□ □□□□ □□ □□ □□ □ □□□□?

A. □□("OrchestratorQueueName").ToString

- B. `QueueName.ToString`
- C. `ProcessABCOueue.ToString`
- D. `OrchestratorOueueName. ABCQueue.ToString`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 44

- Which of the following is a valid way to create a new thread in Java?
- A. `Thread t = new Thread("Background"); t.start();`
  - B. `Thread t = new Thread("Background"); t.run();`
  - C. `Thread t = new Thread("Background"); t.start();`
  - D. `Thread t = new Thread("Background"); t.run();`

Answer: D ([LEAVE A REPLY](#))

Which of the following is a valid way to create a new thread in Java?

NEW QUESTION: 45

Which of the following is a valid way to create a new thread in Java?



- A. RPAUiPath RPA
- B. UiPath RPAAutomation
- C. RPA
- D. UiPath RPA

Answer: B ([LEAVE A REPLY](#))

#### NEW QUESTION: 46

Which of the following is a valid RDP connection string?

- A: RDP://192.168.1.100
- B: RDP://192.168.1.100:3389
- C: RDP://192.168.1.100:3389?ui=0

A. RDP://192.168.1.100

A - RDP://192.168.1.100

B - RemoteRuntime.msi

C - RemoteRuntime.msi

B. RDP://192.168.1.100:3389

A - RDP://192.168.1.100

- B - RDP □□ □ RemoteRuntime.msi□ □□□□□.
- C - RemoteRuntime.msi□ □□□□□.
- C.** UI □□□□ □□□ □ □□□ □□ □□□ □□□□ □□□□.
- A - □□ □□□ □□□□.
- B - □□□□ □□.
- C - RemoteRuntime.msi□ □□□□□.
- D.** UI □□□□ □□□ □ □□□ □□ □□□ □□□ □□□□.
- A - RDP □□□ □□□□□.
- B - □□□□ □□.
- C - RemoteRuntime.msi□ □□□□□.

**Answer: B (LEAVE A REPLY)**

□□ RDP □□□ □□ □□□□ □□ □□ □□□□ □□□□ □□□□□□ UI □□□ □□□ □□□□□ □□ □□ □□ □□□ □□□□ □.

\* □□ A - RDP □□□ □□□□□. □ □□□ □□ □□□ RDP □□□ □□ □□ □□□□ □□□□ □□ □□□□ UI □□□ □□ □□□ □ □□□□.

\* □□ B - RDP □□ □ RemoteRuntime.msi□ □□□□□. RDP □□□ □□□□

\* □□□ □□ B□□ □□ C□ □□□□ □□ RemoteRuntime □□ □□□ □□□ □□ B□ UI □□ □□ □□□ □□□□ □□□.

\* □□ C - RemoteRuntime.msi□ □□□□□. □ □□ □□□ □□□□ □□□□□ □□ □□ C□ UI □□□ □□ □□ □□□ □□□□ □□ □. □□□□:

[□□ □□□ □□□□], [□□ RDP □□], [Microsoft □□ □□□□ □ □□ □□ UiPath □□]

**UiPath-ADPv1** □□ □□□ □□□□□ □□ DumpTop □□ □□□□ □□□ UiPath-ADPv1 □□! DumpTop □ □□ **UiPath-ADPv1** □□ □□□ □□□□□□, DumpTop UiPath-ADPv1 □□ □□□ □□□□□□□□ □□□ □□□□□□□□. □□□□ □□□ □□□□ □□ DumpTop UiPath-ADPv1 □□□ □□□□□. <https://www.dumptop.com/UiPath/UiPath-ADPv1-dump.html> (208 Q&As Dumps, **30%OFF** Special Discount: **KrDump**)

**NEW QUESTION: 47**

Computer Vision □□□□ □□□□ OCR □□□ □□ URL□ □□□□□?

**A.** <https://cv.uipath.com/>

**B.** <https://cvserver.uipath.com/>

**C.** <https://server.uipath.com/>

**D.** <https://computervision.uipath.com/>

**Answer: A (LEAVE A REPLY)**

**NEW QUESTION: 48**

□□ Excel □□□ □□□ □□ □□□ □□□□ □□ □ □□□ □□□ □□□□ □□□□□ □□□□ □□□.



NEW QUESTION: 51

□□□□ □□□ □□ □□ □□□ □□ □□□ □□□□□□.

Properties

UiPath.UIAutomationNext.Activities.NClick

Common

Continue on error

True

+

✓

...

Delay after

Delay (in seconds) after this

+

...

Delay before

Delay (in seconds) to wait b

+

...

DisplayName

Click 'File'

Timeout

10

+

▼

...

Input

Click type

NClickType.Single

▼

...

Cursor motion type

Specifies the type of motion

▼

...

Mouse button

NMouseButton.Left

▼

...

Target

TargetAnchorable

Verify execution

(null)

Input/Output Element

Input element

The Input UI Element define.

+

...

Output element

Output a UI Element to use

+

...

Misc

Private

☐

Options

Alter disabled element

When selected, the activ

+

■

...

Input mode

Hardware Events

▼

Key modifiers

NKeyModifiers.None

▼

...

- □□□□ □□□ □□ □ □□□ □□□ □□□?
- A. □□ □□□ 10□□□□ □□ □□□□□□.
- B. 10□□□ □□ □□□ □□□□□□.
- C. 10□ □□ □□□ □□□□□□.
- D. 10□ □□ □□ □□□ □□□□□□.
- Answer: (SHOW ANSWER)





□ □ □ □ :

1: □□ □□□ - □□ - UiPath □□ □□

**NEW QUESTION: 58**

[illegible]

- □□□ □□ A□ □□□□ RDP□ □□ □□ B□ □□□□□.

- □□ B□□ □□□□ □□□□□ □□ □□ C□ □□ □ □□ RDP □□□ □□□□.

□□ □ UI □□□ □□□ □□□□□ □□□□□ □□□ □□□□□ □□□□□?

**A. UI** ☐☐☐☐ ☐☐☐ ☐ ☐☐☐ ☐☐☐☐ ☐☐☐☐.

□□ A - RDP □□□ □□□□□.

□□ B - □□□□ □□.

□□ C - RemoteRuntime.msi□ □□□□□.

**B. UI** ☐☐☐☐ ☐☐☐ ☐ ☐☐☐ ☐☐☐☐ ☐☐☐☐.

□□ A - RDP □□□ □□□□□.

□□ B - RDP □□ □ RemoteRuntime.msi□ □□□□□.

□□ C - RemoteRuntime.msi□ □□□□□.

**C. UI** □□□□ □□□ □ □□□ □□ □□□ □□□ □□□□.

□□ A - □□ □□□ □□□□.

□□ B - □□□□ □□.

□□ C - RemoteRuntime.msi□ □□□□□.

**D. UI** □□□□ □□□ □ □□□ □□ □□□ □□□ □□□□.

□□ A - RDP □□□ □□□□□.

□□ B - RemoteRuntime.msi□ □□□□□.

□□ C - RemoteRuntime.msi□ □□□□□.

**Answer: B (LEAVE A REPLY)**

**NEW QUESTION: 59**

☐☐ ☐ ☐☐ ☐☐ ☐☐☐☐☐ ☐☐ ☐☐☐ ☐☐☐☐☐☐

**A.** □□□ □□ □□□ □□ □□ □□ □□□ □□ □ □□□□.

**B.** □□ □□ □□ □□□ □□□ □□ □□□ □□ □□□□.

**C.** □□ □□ □□□ □□ □□ □□□ □□ □□□□.

**D.** □□ □□□ □□□ □□ □□ □□ □□□ □□□ □□ □ □□□□.

**Answer: A (LEAVE A REPLY)**

```
UiPath-ADPv1 00 0000 000000 00 DumpTop 00 0000 0000 UiPath-ADPv1 00! DumpTop 0 00 UiPath-ADPv1 00
0000 00000000, DumpTop UiPath-ADPv1 00 0000 0000000000 0000 0000000000. 00000 0000 000000 00
```

DumpTop UiPath-ADPv1 ☐☐☐ ☐☐☐☐☐. <https://www.dumptop.com/UiPath/UiPath-ADPv1-dump.html> (208 Q&As Dumps, 30%OFF  
Special Discount: **KrDump**)